


Risk Assessment in Event Evaluation

*The Use of Probabilistic Risk Assessment
for the Evaluation of Incidents*

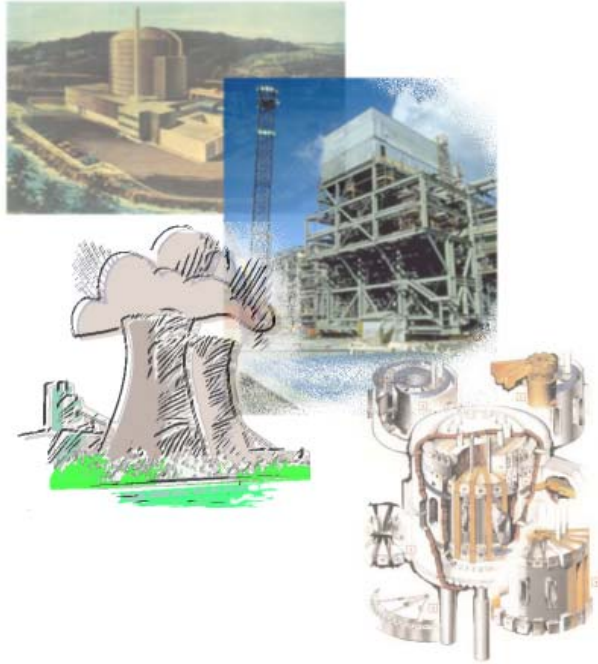

Produced for the U.S. Nuclear Regulatory Commission

By

**Curtis Smith
Dana Kelly
Mike Calley
James Knudsen
John Schroeder**

Idaho National Laboratory

Spring 2016



NOTICE

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product or process disclosed in this report, or represents that its use by such third party would not infringe privately owned rights. The views expressed in this report are not necessarily those of the U.S. Nuclear Regulatory Commission.

FOREWORD

Incidents at locations such as nuclear power plants, waste repositories, and medical treatment facilities occur at many different times and under a variety of situations. Even the most modern, well run organizations may experience events that are precursors to more serious situations. Currently, the U.S. Nuclear Regulatory Commission evaluates a variety of such events at commercial nuclear plants via the Significance Determination Process (SDP), Management Directive 8.3, and the Accident Sequence Precursor (ASP) program. In these programs, the analyst calculates a conditional risk measure (e.g., conditional core damage probability) for an initiating event situation or an unplanned equipment outage. This calculation is called an “event evaluation.”

An “event evaluation” uses a probabilistic risk assessment model to obtain a risk measure that is conditional on the situation which existed during an incident. The *Risk Assessment in Event Evaluation* material is intended to address how this evaluation is performed using modern risk analysis tools. Specifically, we will discuss four areas of interest:

1. Background material related to event evaluations.
2. A theoretical framework behind event evaluation calculations.
3. Pragmatic considerations when performing event evaluations using risk analysis tools.
4. Guidance for performing event evaluations when using the SAPHIRE software including the SAPHIRE available workspaces; Significance Determination Process (SDP), Events and Conditions Assessment (ECA), and General Analysis.

Upon completion of this course material, the reader should be familiar with the concept of performing an event evaluation. The reader should also be able to identify the key issues relevant to performing an event evaluation as well as the mechanics of performing an evaluation using the supplied software and risk models. Lastly, the reader should be aware of uncertainties and limitations inherent in the results of typical event evaluations.

RELATED READING

- Coe, D. H., "Improving Risk Insight Utilization and Communication in the Inspection, Assessment, and Enforcement Programs of the Nuclear Regulatory Commission," *Proceedings of PSA'99, International Meeting on Probabilistic Safety Assessment, August 1999*, pp. 765-771.
- Eide, S. A. et al., *Reevaluation of Station Blackout Risk at Nuclear Power Plants. Analysis of Loss of Offsite Power Events: 1986-2004*, NUREG/CR-6890, December 2005.
- Fleming, K. N., *Risk-Informed Decision Making*, "Validation of PSAs for Use in Risk Monitoring Applications," *American Society of Mechanical Engineers*, PVP-Vol. 35B, July 1997.
- Hoertner, H. and S. Babst, "Results of the Precursor Analysis for German Nuclear Power Plants," *Proceedings of PSA'99, International Topical Meeting on Probabilistic Safety Assessment, August 1999*, pp. 731-737.
- Mosleh, A., *Procedure for Analysis of Common-Cause Failures in Probabilistic Safety Analysis*, U.S. NRC, NUREG/CR-5801, 1993.
- Mosleh, A, D. Rasmuson, and F. Marshall, *Guidelines on Modeling Common-Cause Failures in Probabilistic Risk Assessment*, NUREG/CR-5485, 1998.
- Poloski, J., D. Marksberry, C. Atwood, and W. Galyean, *Rates of Initiating Events at U.S. Nuclear Power Plants: 1987-1995*, NUREG/CR-5750, 1999.
- Smith, C. L., "Calculating Conditional Core Damage Probabilities for Nuclear Power Plant Operations," *Reliability Engineering and System Safety*, **59** (1998), pp. 299-307.
- U. S. NRC, *Risk Assessment of Operational Events Handbook*, Volume 1 – Internal Events, Revision 2.0, January 2013.
- U. S. NRC, *Risk Assessment of Operational Events Handbook*, Volume 2 – External Events, Revision 1.01, January 2008.
- U. S. NRC, *Risk Assessment of Operational Events Handbook*, Volume 3 – SPAR Model Reviews, Revision 2.0, September 2010.
- U. S. NRC, *Risk Assessment of Operational Events Handbook*, Volume 4 – Shutdown Events, Revision 1.0, April 2011.

CONTENTS

1.	Introduction	1-1
1.1	Overview	1-2
1.2	Example Problems.....	1-3
1.3	History of Event Evaluation.....	1-3
1.4	Summary of Nuclear Power Plant PRA Models	1-4
2.	Risk Measures for Event Assessment.....	2-1
2.1	Introduction	2-2
2.2	Conditional Probability Calculations	2-5
2.3	Event Importance Calculations	2-10
2.4	Risk Measures Used for Other Types of Analyses.....	2-13
2.5	Workshop	2-14
3.	Initiating Event Assessments.....	3-1
3.1	Introduction	3-2
3.2	Treatment of Initiating Events	3-4
3.3	Treatment of Component Recovery	3-6
3.4	Treatment of Component Common Cause Failures	3-7
3.5	Appropriate Risk Measure for Initiating Event Assessment	3-9
3.6	Workshop	3-10
4.	Condition Assessments	4-1
4.1	Introduction	4-2
4.2	Treatment of Initiating Events for Condition Assessments	4-5
4.3	Treatment of Components for Condition Assessments.....	4-6
4.4	Treatment of Component Common Cause Failures	4-6
4.5	Appropriate Risk Measure for Condition Assessments	4-6
4.6	Workshop	4-8
5.	Event Evaluation and SAPHIRE.....	5-1
5.1	Overview of Steps Involved in the Analysis	5-2
5.2	Steps for Event Evaluation in SAPHIRE.....	5-3
5.3	Modifying the Nominal PRA Model	5-8
5.4	Workshop.....	5-8
6.	Treatment of Common Cause Events	6-1
6.1	Introduction	6-2
6.2	Review of Basic Parameter Model and Alpha-Factor Method	6-3
6.3	Common Cause Issues for Event Evaluations	6-5
6.4	Adjusting CCF Probabilities	6-6
6.5	Workshop	6-18

CONTENTS (cont.)

7.	Treatment of Recovery Events	7-1
7.1	Introduction	7-2
7.2	Recovery of Initiating Events.....	7-3
7.3	Recovery of System/Component Failures.....	7-9
7.4	Workshop	7-14
8.	Initiator Type Events using ECA	8-1
8.1	Introduction	8-2
8.2	Plant Overview	8-2
8.3	Event Description	8-3
8.4	Preliminary Steps for Initiating Event Assessment	8-4
8.5	ECA Workspace Walk-Through	8-7
8.6	Workshop	8-22
9.	Condition Assessments using ECA	9-1
9.1	Introduction	9-2
9.2	Event Description	9-3
9.3	Preliminary Steps for Condition Assessments	9-3
9.4	ECA Workspace Walk-Through	9-4
9.5	Workshop	9-16
10.	Considerations of Uncertainty	10-1
10.1	Overview of Uncertainty	10-2
10.2	Other Uncertainty Considerations	10-5
10.3	Steps to Perform an Epistemic Uncertainty Evaluation	10-5
10.4	Example Uncertainty Analysis.....	10-6
10.5	Workshop	10-8
11.	Event Evaluation Case Studies	11-1
11.1	Introduction	11-2
11.2	Case Study 1	11-3
11.3	Case Study 2	11-9
12.	Test Review	12-1
12.1	Example problems.....	12-2
	Appendix A – Thoughts on Calculating CCDPs	A-1

1. INTRODUCTION

Section 1 contains an introduction to the topic of *Risk Assessment in Event Evaluation*. A brief overview of the course material, example problems, and history of event evaluations are provided.

Learning Objectives

- Explain the intent of the *Risk Assessment in Event Evaluation* material.
- Describe the history and evolution of event evaluation.
- Describe the two types of PRA models available for commercial nuclear power plant risk analysis

Section 1 Topics

- 1.1 Overview
- 1.2 Example Problems
- 1.3 History of Event Evaluation
- 1.4 Summary of Nuclear Power Plant PRA Models

Notes for this Section

ASP	Accident Sequence Precursor
BWR	boiling water reactor
CCDP	conditional core damage probability
ISLOCA	interfacing-systems loss-of-coolant accident
LDCA	loss of DC bus
LLOCA	large-break loss-of-coolant accident
LOCCW	loss of component cooling water
LOOP	loss of offsite power
LOSWS	loss of service water system
MLOCA	medium-break loss-of-coolant accident
PRA	probabilistic risk assessment
PWR	pressurized water reactor
SGTR	steam generator tube rupture
SLOCA	small-break loss-of-coolant accident
SPAR	standardized plant analysis risk
TRANS	reactor trip/transient



1.1 Overview

- What is an “event evaluation?”

“Event evaluation is a technique where a probabilistic risk assessment (PRA) model is used to obtain a risk measure conditional on the situation existing during an actual or hypothetical event.”

- The *Risk Assessment in Event Evaluation* material is intended to
 - ◇ Discuss background material related to event evaluations.
 - ◇ Present the theoretical framework behind event evaluations.
 - ◇ Illustrate practical considerations when performing event evaluations.
 - ◇ Illustrate steps and provide guidance for performing event evaluations using the SAPHIRE 8 code including available SAPHIRE Workspaces; Events and Conditions Assessment (ECA) workspace and the Significance Determination Process (SDP) workspace..
- Major topics and areas of discussion that are covered in the *Risk Assessment in Event Evaluation* material include
 - ◇ PRA models that are available for use in event evaluation.
 - ◇ The risk measures that may result from an event evaluation.
 - ◇ Details on two types of event assessments.
 - ◇ How to treat and model common-cause failure events.
 - ◇ Issues related to initiating events and system recovery actions.
 - ◇ Processing event evaluations with SAPHIRE 8 including the Events and Conditions Assessment (ECA) workspace and the Significance Determination Process (SDP) workspace.
 - ◇ Evaluating uncertainty in the event evaluation.
 - ◇ The display and interpretation of event evaluation results.

1.2 Example Problems


- Several of the sections presented include example problems and workshops.
 - ◇ For the sections prior to the SAPHIRE 8 Workspace overview (i.e., Sections 1-7), the workshops will consist of questions that can be answered without the help of a computer.
 - These questions are intended to help reinforce the concepts that are presented in the respective section.
 - ◇ For the sections after the SAPHIRE 8 Workspace overview (i.e., Section 8-12), the workshops will consist of problems that require exercising the SAPHIRE software.
 - These questions are intended to provide “hands-on” experience in performing an event evaluation using current tools.

1.3 History of Event Evaluation

- Around 1977, the U.S. NRC Risk Assessment Review Group acknowledged the potential for accident precursor events to contribute to the overall plant operational risk.
 - ◇ The Review Group recommended that “potentially significant sequences, and precursors, as they occur, be subjected to the kind of analysis contained in WASH-1400.” WASH-1400 is also known as the “Reactor Safety Study.”
- In 1982, the first of a series of NUREG/CR reports was published that addressed the Review Group’s recommendation.
 - ◇ NUREG/CR-2497, *Precursors to Potential Severe Core Damage Accidents: 1969-1979, A Status Report*, addressed precursor events from the 1969 to 1979 time period.
 - ◇ Other NUREG/CR (NUREG/CR-4674) reports in the series addressed precursor events for subsequent years. These reports are the Accident Sequence Precursor (ASP) analyses documents.
 - ◇ These older analyses utilized simplistic models and evaluation techniques (refer to Daily Events Manual). In this course, we will present and provide detailed models and techniques.

- To perform an event evaluation, several processes must be completed prior to the actual analysis of an incident.

An overview of a typical event evaluation process

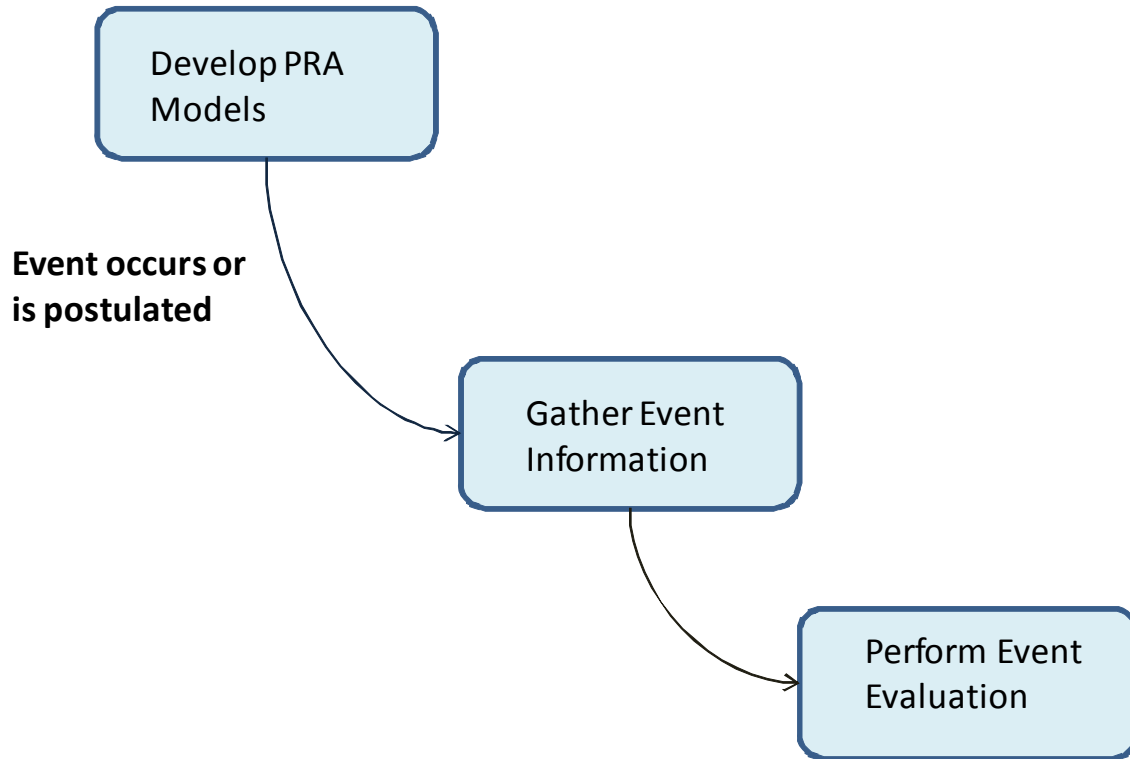

In this course, we will focus primarily on the last step in the process. We will, though, discuss some of the PRA models available for event evaluations.

1.4 Summary of Nuclear Power Plant PRA Models

- In general, there are two types of nuclear power plant PRA models.
 - ◇ Plant specific PRA models developed and used by industry. These models are developed by the individual plants and they will be referred to as “utility PRA model.”
 - ◇ Standardized plant PRA models developed and used by the NRC. These models are referred to as a “standardized plant analysis risk”, or SPAR model.
- The SPAR PRA models are available in the SAPHIRE 8 computer code.
- The main difference between the two types of PRA models is the level of detail built into the models, although this difference is lessening with time.

- ◇ The SPAR models contain a consistent number of event trees for the PWR and BWR plants.
- ◇ For the SPAR models, the number of fault trees for each PWR or BWR varies, depending on the plant-specific front-line systems needed to prevent core damage.
 - These fault trees have detail down to the component level.
 - Support systems are modeled based on collected information and industry PRA comparison.
- ◇ For the utility PRA models, the number of event and fault trees contained in the PRA can vary significantly from plant to plant, and they generally contain somewhat more detail than the SPAR models.
 - The utility PRA may contain more event trees (and analyzed initiating events) than the SPAR model (SPAR models evaluate all utility PRA initiating events that contribute greater than 1 percent overall CDF).
 - The utility PRA may contain more fault trees than the SPAR model.
- The SPAR plant categorization scheme previously grouped plants based upon similar responses to transients and accidents (e.g., PWR Class B, Westinghouse 4-LOOP). Differences are based upon:
 - ◇ Front-line systems included in the plant design.
 - ◇ Availability of unique mitigative features that provide core protection.

- The SPAR plant categorization scheme was developed by examining how the systems for each reactor plant are used to perform protective functions to prevent core damage following certain initiating events. A list of analyzed initiating events include (from "Generic PWR" SPAR model):
 - ◇ HPI Cold Leg Interfacing System Loss-of-coolant Accident
 - ◇ LPI Cold Leg Interfacing System Loss-of-coolant Accident
 - ◇ RHR Suction Interfacing System Loss-of-coolant Accident
 - ◇ Large Loss-of-coolant Accident
 - ◇ Loss of Vital Voltage Bus A
 - ◇ Loss of Condenser Heat Sink
 - ◇ Loss of Vital DC Bus A
 - ◇ Loss of Vital DC Bus B
 - ◇ Loss of Feedwater
 - ◇ Loss of Offsite Power (Grid Related, Plant Centered, Switchyard Related, and Extreme Weather Related)
 - ◇ Loss of Service Water
 - ◇ Medium Loss-of-coolant Accident
 - ◇ Small Loss-of-coolant Accident
 - ◇ General Plant Transient
 - ◇ Loss of Component Cooling Water
 - ◇ Steam Generator Tube Rupture
 - ◇ Reactor Vessel Rupture (Excessive Loss-of-coolant Accident)

- Project statistics for the "Generic PWR" SPAR model include:

Item	Number
Fault Trees	250
Event Trees	29
Basic Events	3689
Accident Sequences	2144
Event Failure Modes	19

Summary - The SPAR models are categorized (i.e., grouped) by plant design corresponding to similar responses to transients and accidents. The SPAR models also are quite uniform across the model population since similar modeling assumptions, techniques, data, and size are used during the model construction.

- For this course, the computer exercises (e.g., in the SAPHIRE software) will utilize the "Generic PWR" SPAR model.
- The SPAR models utilize several SAPHIRE features to assist in the construction of the PRA model
 - ◇ Template events, where the event data is shared as part of an overall generic database tied to Equipment Performance Information Exchange System (EPIX)/Reliability and Availability Data System (RADS) data reported by the industry.
 - ◇ Analysis module to numerically evaluate common-cause failure probabilities.
 - ◇ Analysis module to determine the frequency and recovery probability for losses of offsite power.
- Documentation for the SPAR models is provided in a subdirectory in the electronic database.

NOTES

2. RISK MEASURES FOR EVENT EVALUATION

Section 2 introduces the various risk measures calculated in an event evaluation. Examples of how to calculate these risk measures are provided.

Learning Objectives

- Describe two types of event evaluations used for the analysis of events and provide an example of each.
- Define core damage probability (CDP) and conditional core damage probability (CCDP).
- Define the event importance measure.
- Discuss alternative risk measures.

Section 2 Topics

- 2.1 Introduction
- 2.2 Conditional Probability Calculations
- 2.3 Event Importance Calculations
- 2.4 Risk Measures Used for Other Types of Analyses
- 2.5 Workshop

Notes for this Section

ASP	Accident Sequence Precursor
CCDP	conditional core damage probability
CD	core damage
CDP	core damage probability
DG	diesel generator
SPAR	standardized plant analysis risk (the PRA models used by the SAPHIRE software)



2.1 Introduction

- Event evaluation is a technique by which a PRA model is used to calculate a risk measure conditional on the situation existing during an event.
 - ◇ A PRA model is modified to account for specific initiators, failures, or conditions that occurred during the event in question.
- Two types of event analysis are used:
 - ◇ Events involving an *initiator*. These are called **initiating event assessments**.

Examples:


- 1) Offsite power was lost during a storm while at full power.
- 2) A shipping cask was dropped during transportation.
- 3) An electric generator stopped supplying power to a critical bus.

- ◇ Events involving a *reduction* in safety system reliability or function for a specific *duration*. These are called **condition assessments**.

Examples:

- 1) A manual valve was improperly installed and was inoperable for several months.
- 2) A generator fuel supply was found to be empty due to a leak.

- Two general steps take place during the actual event evaluation:

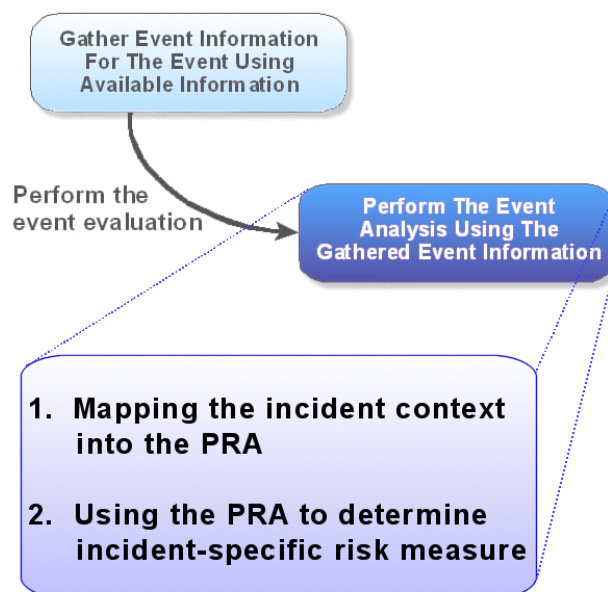

- **Gathering detailed information about the event is crucial.**

- ◇ Knowledge of the system design and operation, along with details found in the PRA model, are required to map the incident into the PRA model accurately, and will help to avoid unnecessarily conservative results.
 - Lack of detailed information may require the analyst to make conservative assumptions.
- ◇ Questions about equipment recoverability and potential for common cause failure complicate the modeling of typical events.
- ◇ Types of information that are needed for an event evaluation include
 - Chronology of actions during event.
 - Operator actions including recovery of systems.
 - Equipment failures and failure causes.
 - Equipment unavailability (e.g., equipment out for testing)
 - Conditions that may have hindered operation.
 - Cause of initiating event (if applicable).
 - Location of equipment.
- Mapping the event into the PRA model is a prerequisite to obtaining event evaluation measures.

MAPPING the event into the PRA model is the process of modifying the PRA so that it represents the conditions of the event (either actual or hypothetical) being modeled. In other words, the context surrounding the event is imposed on the PRA model and boundary conditions.

- Once the PRA model is selected, then modify the model.
 - Adjust the initiating events depending on the type of event being evaluated.
 - Determine impacts on system reliability, which potentially include.
 1. Modeling failed, unavailable, or degraded components.
 2. Modifying common cause failure probabilities.
 3. Modifying nonrecovery probabilities.
 4. Changing the structure/assumptions of the PRA model.
- After mapping the event into the PRA, risk measures for the event can be calculated.

- Several different types of risk measures could be used to evaluate the risk significance of an event.
 - ◇ For example, we could find a conditional probability of core damage given a specified condition.

$$P(\text{core damage} | \text{offsite power was lost and DG A did not start}) = \dots$$

- ◇ An increase in core damage probability, referred to as “event importance,” can be found by subtracting the nominal core damage probability from the conditional probability.

$$\text{Importance}_{\text{event}} = P(\text{CD} | \text{event conditions}) - P(\text{CD} | \text{nominal conditions})$$

- ◇ Alternatively, we could use a ratio measure instead where we would divide the conditional probability by the nominal probability.
- ◇ A conditional frequency of core damage could be found given a specified condition and duration.
- ◇ Similarly, a conditional frequency of large early release of fission products from containment could be calculated.
- ◇ Traditional PRA importance measures can be obtained for the basic events in the cut sets. Examples of these importance measures include
 - Fussell-Vesely, Birnbaum, and Risk Increase Ratio (a.k.a., RAW).
- ◇ Uncertainty analysis of the results via Monte Carlo sampling is also possible.
- ◇ Lastly, quality checks should be made of the resulting analysis.

Summary: The good and the bad →

Good: *An abundance of risk metrics are available for modern event assessments.*

Bad: *An abundance of risk metrics are available for modern event assessments.*

2.2 Conditional Probability Calculations

- Conditional probability calculations attempt to estimate the probability of a bad outcome (e.g., core damage) given that an event or condition occurred.
- ◇ For nuclear power plants, the conditional core damage probability (CCDP) given condition Z is

$$P(CD | Z) = \frac{P(CD \cap Z)}{P(Z)} = CCDP$$

where $P(Z) > 0$.

Boolean algebra review #1 \Rightarrow \cup represents a logical OR operation (or union)
 \cap represents a logical AND operation (or intersection)

Example #1: Assume that the (nominal) minimal cut sets are

$$CD = IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE \cdot D$$

where, for conciseness, “ \cdot ” indicates the logical AND operation and “+” indicates the logical OR operation. What this means is that to get core damage (CD), we first have to have an initiating event (IE) and then either (1) A and B fail, (2) A and C fail, (3) B and C fail, or (4) D fails.

- ◇ The condition to model is that initiator IE occurred while component C was inoperable (and was not recoverable).
- ◇ Thus, we want to calculate

$$P(CD | IE = \text{True}, C = \text{True})$$

(i.e., the CCDP if this is a nuclear power plant PRA).

Boolean algebra review #2 \Rightarrow (Event A) “AND” (TRUE house event) = Event A
 (Event A) “OR” (TRUE house event) = TRUE

- ◇ In terms of event probabilities, we can rewrite the Example #1 equation as

$$P(CD) = P(IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE \cdot D)$$

This is the expression for the probability of the union of the minimal cut sets that one would obtain using a fault tree/event tree tool like SAPHIRE. When we have a set of minimal cut sets, we need to quantify the union of those cut sets to obtain our results.

◇ In PRA, this problem is typically approached with one of three methods¹

1. Rare event approximation: This calculation approximates the probability of the union of minimal cut sets by assuming cut sets are mutually exclusive (i.e., no overlap of cut sets). The equation for the rare event approximation is

$$P = \sum_{i=1}^m C_i$$

where P is the probability of interest, C_i is the probability of the i'th cut set, and m is the total number of cut sets.

2. Minimal cut set upper bound: This calculation approximates the probability of the union of minimal cut sets by assuming each cut set is independent of all other cut sets (i.e., no shared basic events in multiple cuts sets which means each basic event appears in only one cut set). The equation for the minimal cut set upper bound is

$$P = 1 - \prod_{i=1}^m (1 - C_i)$$

where P is the probability of interest, C_i is the probability of the i'th cut set, and m is the total number of cut sets. Note (1) that the capital pi symbol implies multiplication and (2) most PRA tools, including SAPHIRE, utilize this equation as the default method of quantification.

3. Exact: This calculation calculates the probability of the union of minimal cut sets by accounting for the overlap of cut sets and properly accounts for whether or not each cut set is independent of all other cut sets. This calculation can be very time consuming. There are various methods for determining the exact probability given a set of cut sets. The most common approach is referred to by SAPHIRE as "min-max." The min-max approach works by obtaining various combinations of the minimal cut sets to form higher-order sets. Then, finds the probability from the "first order" set (which

¹A newer approach to quantification is the binary decision diagram (BDD), which can produce an exact result very quickly. This option is not yet widely available in U.S. PRA software.

are just the cut sets you started with). From this value, you subtract the probability from the "second order" set. From this value you add the probability from the "third order" set. From this value you subtract the probability from the "fourth order" set, etc., with as many passes as you have cut sets.

Note, when you begin with a typical number of PRA cut sets, the exact probability calculation performed in this fashion may be very time consuming or even impossible to compute. Thus, the true exact solution is rarely employed in practice. Often, an approximation is performed by specifying the number of passes to perform. SAPHIRE will perform up to 50 passes.

As an example, when there are two cut sets, or $CD = A + B$, looks like

$$P(CD)_{\text{exact}} = P(A) + P(B) - P(A \cap B)$$

Note the "AND" sign (\cap) in the equation. This implies that Boolean algebra must be performed for each higher-order set, which greatly complicates the quantification.

- ◇ Now, back to our example. We must quantify the equation for Example #1. Let us evaluate this equation using both the rare event approximation and the exact equation.

$$P(CD) = P(IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE \cdot D)$$

Rare event approximation:

$$P = \sum_{i=1}^4 C_4$$

$$= P(IE \cdot A \cdot B) + P(IE \cdot A \cdot C) + P(IE \cdot B \cdot C) + P(IE \cdot D)$$

Probabilities to quantify this equation will be presented next.

Exact (inclusion-exclusion)

$$= P(IE) \cdot [P(A \cdot B) + P(A \cdot C) + P(B \cdot C) + P(D) - P(A \cdot B \cdot A \cdot C) - P(A \cdot B \cdot B \cdot C) - P(A \cdot B \cdot D) - P(A \cdot C \cdot B \cdot C) - P(A \cdot C \cdot D) - P(B \cdot C \cdot D) + P(A \cdot B \cdot A \cdot C \cdot B \cdot C) + P(A \cdot B \cdot A \cdot C \cdot D) + P(A \cdot B \cdot B \cdot C \cdot D) + P(A \cdot C \cdot B \cdot C \cdot D) - P(A \cdot B \cdot A \cdot C \cdot B \cdot C \cdot D)]$$

Now, we still need to evaluate the Boolean algebra in the exact probability expression. So, let us do that and also rewrite the equation by denoting that $P(IE) = ie$, $P(A) = a$, etc. Assuming independence, we have

$$\begin{aligned}
 P(CD) &= ie (ab + ac + bc + d - abc - abc - abd - abc - acd - bcd + abc + abcd + abcd + abcd - abcd) \\
 &= ie (ab + ac + bc + d - 2abc - abd - acd - bcd + 2abcd)
 \end{aligned}$$

- ◇ This equation would then be used to calculate the *exact* probability of having core damage. Again, we still need the event probabilities.
- ◇ The condition for Example #1 was that we want to evaluate initiator IE occurring while component C is inoperable (and was not recoverable). Thus, our CCDP is

$$P(CD | IE=True, C=True) = P(A + B + D)$$

Rare event approximation:

$$= P(A) + P(B) + P(D) = a + b + d$$

Exact (inclusion-exclusion)

$$\begin{aligned}
 &= P(A) + P(B) + P(D) - P(A \cdot B) - P(A \cdot D) - P(B \cdot D) + P(A \cdot B \cdot D) \\
 &= a + b + d - ab - ad - bd + abd
 \end{aligned}$$

- ◇ To calculate the CCDP, we need values for the event probabilities. Assume
 - $P(IE | IE \text{ occurred}) = 1$
 - $P(A) = 1 \times 10^{-1}$
 - $P(B) = 2 \times 10^{-1}$
 - $P(C) = 5 \times 10^{-2}$
 - $P(D) = 5 \times 10^{-3}$.

- ◇ Finally then, the CCDP using the assumed probability values is

Rare event approximation:

$$\begin{aligned}
 P(CD | IE=True, C=True) &= a + b + d = (0.1) + (0.2) + (0.005) \\
 &= 0.305 \approx 0.3
 \end{aligned}$$

Exact (inclusion-exclusion)

$$P(CD | IE=True, C=True) = a + b + d - ab - ad - bd + abd$$

$$= (0.1) + (0.2) + (0.005) - (0.02) - (0.0005) - (0.001) + (0.0001) \\ = 0.2836 \approx 0.3 .$$

- ◇ We can now state that "the conditional core damage probability, or CCDP, given that initiator IE occurs while component C is inoperable (and is not recoverable) is about 0.3."
- ◇ Other examples of how the CD equation changes when different components fail are shown below.

$$P(CD | \text{nominal}) = P(IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE \cdot D)$$

$$P(CD | IE=True, A=True) = P(B + C + D)$$

$$P(CD | IE=True, D=True) = 1.0 \text{ (the system has failed)}$$

$$P(CD | D=True) = P(IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE) \\ = P(IE)$$

2.3 Event Importance Calculations

- Event Importance calculations attempt to estimate the change in core damage probability given that an event or condition occurred.

- ◇ The event importance for core damage given an incident where Z fails is

$$\text{Importance}_{\text{event}} = \text{CCDP} - \text{CDP}$$

where CCDP is the conditional core damage probability given Z fails
CDP is the nominal core damage probability.

- ◇ The $\text{Importance}_{\text{event}}$ calculation is a difference of two probabilities, and, as such, is not a probability (hence the name “Importance”).

Note that the CCDP could be *lower* than the CDP (for example, if you are proposing a hypothetical design improvement), thereby resulting in a negative $\text{Importance}_{\text{event}}$ value.

- ◇ The $\text{Importance}_{\text{event}}$ gives us a sense of the relative differences between the two probabilities.

- ◇ We will see later that the SAPHIRE software calculates an $\text{Importance}_{\text{event}}$ for condition assessments.

- Event cases that have a nominal case (i.e., CDP) subtracted from a CCDP are just a type of importance measure. This numerical result has been mislabeled in the past as a CCDP.

- Example #2 for an $\text{Importance}_{\text{event}}$ calculation: Assume that our nominal minimal cut sets for core damage are

$$\text{CD} = \text{IE} \cdot \text{A} \cdot \text{B} + \text{IE} \cdot \text{A} \cdot \text{C} + \text{IE} \cdot \text{B} \cdot \text{C} + \text{IE} \cdot \text{D}$$

- ◇ The condition to model is that component C was inoperable (and was not recoverable) for a duration of 30 days.
- ◇ We want to calculate

$$\text{P}(\text{CD} | \text{C}=\text{True}) - \text{P}(\text{CD}) = \text{CCDP} - \text{CDP}$$

(i.e., $\text{Importance}_{\text{event}}$) where the duration is 30 days.

- ◇ Assuming that the events IE, A, B, C, and D are independent and their probabilities can be written as $P(IE) = ie$, $P(A) = a$, $P(B) = b$, $P(C) = c$, and $P(D) = d$, we can write the CDP as

$$P(CD) = P(IE \cdot A \cdot B + IE \cdot A \cdot C + IE \cdot B \cdot C + IE \cdot D)$$

Rare event approximation:

$$= ie (ab + ac + bc + d) = CDP$$

Exact (inclusion-exclusion)

$$= ie (ab + ac + bc + d - 2abc - abd - acd - bcd + 2abcd) \\ = CDP$$

- ◇ The condition to model for Example #2 is that component C was inoperable (and was not recoverable). Thus, our CCDP is

$$P(CD | C=True) = P(IE \cdot A + IE \cdot B + IE \cdot D)$$

Rare event approximation:

$$= ie (a + b + d) = CCDP$$

Exact (inclusion-exclusion)

$$= ie (a + b + d - ab - ad - bd + abd) = CCDP$$

- ◇ Again, to calculate the CDP and CCDP, we need values for the event probabilities.
Assume

- $P(\text{IE} \mid \text{duration of 30 days}) = 1 \times 10^{-2}$
- $P(A) = 1 \times 10^{-1}$
- $P(B) = 2 \times 10^{-1}$
- $P(C) = 5 \times 10^{-2}$
- $P(D) = 5 \times 10^{-3}$

- ◇ The exact CDP and CCDP using the probability values above are

$$\text{CDP} = P(\text{CD}) = 0.000378 = 3.8\text{E-}4$$

$$\text{CCDP} = P(\text{CD} \mid C=\text{True}) = 0.00284 = 2.8\text{E-}3$$

- ◇ Therefore, our $\text{Importance}_{\text{event}}$ is

$$\text{Importance}_{\text{event}} = 0.00284 - 0.000378 = 0.00246 \approx 2.5\text{E-}3$$

Note that for initiating event analysis, the $\text{Importance}_{\text{event}}$ is not calculated.

Summary:

We tend to use only two risk metrics for event evaluations:

$$P(\text{Core Damage} \mid \text{event}) = \text{CCDP}$$

$$\text{Importance}_{\text{event}} = \text{CCDP} - \text{CDP}$$

Fortunately, we have software to perform the Boolean algebra!

2.4 Risk Measures Used for Other Types of Analyses

- The NRC regulates nuclear power plant operation through a combination of several regulatory processes.

As part of these regulatory activities, a variety of risk metrics are utilized. At this point, we have provided details on three metrics, a CCDP, CDP, and Importance_{event}.

- To help contrast the process for event evaluations with other NRC activities, we will briefly look at two risk-related activities.
 - ◇ Significance Determination Process (SDP)
 - ◇ Generic Issue Resolution
- The Significance Determination Process (SDP) is one of the methods that the NRC uses to assist in risk-worth determination of inspection incidents. The process is quantitative and utilizes the SPAR Models and the available Workspaces in SAPHIRE.
 - ◇ The SAPHIRE SDP Workspace is one option for determining the risk significance of an inspection finding. The SAPHIRE SDP Workspace has been designed to assist inspectors with identifying affected systems and components for event mapping. The design minimizes the flexibility and mapping options of the event assessment details (i.e., uses conservative assumptions [CCF adjustments and recoveries]), and the results tend to be a more conservative.
 - ◇ The SAPHIRE ECA Workspace is another option for determining the risk significance of an inspection finding. The SAPHIRE ECA Workspace has been designed to allow flexibility of the details for an event assessment, and therefore the analyst has to be much more familiar with the model being used, and the implications of selecting various failure options (i.e., independent versus potential common cause failure).
 - ◇ Decision criteria are provided via regions (and associated colors) of interest:

Red	Increase is $> 10^{-4}/\text{yr}$
Yellow	Increase is $> 10^{-5}/\text{yr}$ and $\leq 10^{-4}/\text{yr}$
White	Increase is $> 10^{-6}/\text{yr}$ and $\leq 10^{-5}/\text{yr}$
Green	Increase is $\leq 10^{-6}/\text{yr}$

- ◇ Note that if one knows the rate (λ) of an event like core damage, the probability of one of more events can be found by:

$$P(\text{event}) = 1 - \exp(-\lambda T)$$

$$\text{If } (\lambda T) < 0.1, \text{ then } P(\text{event}) \approx \lambda T$$

- Generic Issue Resolution

To assess the cost effectiveness of a particular plant alternative, a dollar-to-person-rem averted ratio (DPR) is generated.

A value of \$2,000 per person-rem averted has been used by the NRC as an upper bound in deciding whether corrective measures may be appropriate (NUREG-1530 has a discussion about this value).

When onsite averted costs (i.e., a potential reduction of onsite accident costs) are included as a cost offset, the DPR ratio becomes;

$$DPR = \frac{\text{Cost of Alternative} - \text{Onsite Averted Cost}}{\text{Offsite Person} - \text{rem Averted}}$$

As part of the calculation for onsite averted cost and the person-rem averted, the change in core damage frequency (due to the proposed modification) is estimated.

2.5 Workshop

3. INITIATING EVENT ASSESSMENT

Section 3 discusses the theory behind performing initiating event assessments, which are performed when the event being evaluated involves the occurrence of a PRA initiating event.

Learning Objectives

- ◇ Explain the initiating event assessment and the steps involved.
- ◇ State the appropriate risk measure for an initiating event assessment.

Section 3 Topics

- 3.1 Introduction
- 3.2 Treatment of Initiating Events
- 3.3 Treatment of Component Recovery
- 3.4 Treatment of Component Common Cause Failures
- 3.5 Appropriate Risk Measure for Initiating Event Assessment
- 3.6 Workshop

Notes for this Section



3.1 Introduction

- Event evaluations are performed in order to quantify the risk potential from a particular incident, either actual or hypothetical.
 - ◇ For initiating event assessments, the risk arises due to an initiator occurring.
 - Following the upset condition caused by the initiator, the facility or system in question is immediately forced into a "risky" situation. Recall that the initiating event is the first event in an accident sequence, leading to core damage; without the initiating event, we cannot have core damage.
 - Components or systems that are degraded or inoperable at the time the initiator occurs increase the overall risk of the event if they impact systems intended to respond to the upset caused by the initiating event.
 - A core damage probability can be calculated that is conditional upon the initiator occurring and the initial conditions of the event.
 - ◇ For the SPAR models, a set of initiators is modeled (for example, from the “Generic PWR” Model).

Event Trees		Main Trees
New event tree ...		
+	ISL-HPI	SI cold leg discharge ISLOCA
+	ISL-LPI	RHR discharge ISLOCA
+	ISL-RHR	RHR suction ISLOCA
+	LLOCA	large loss-of-coolant accident
+	LOACA	loss of vital ac 1AA02 bus
+	LOACCW	loss of auxiliary component cooling water
+	LOCHS	loss of condenser heat sink
+	LODCA	loss of vital dc 1AD1 bus
+	LODCB	loss of vital dc 1BD1 bus
+	LOMFV	loss of main feedwater
+	LONSW	loss of nuclear service cooling water
+	LOOPGR	loss of offsite power (Grid related)
+	LOPPC	loss of offsite power (Plant Centered)
+	LOOPSC	loss of offsite power (Switchyard centered)
+	LOOPWR	loss of offsite power (Weather related)
+	MLOCA	medium loss-of-coolant accident
+	RXVRUPT	reactor vessel rupture
+	SGTR	steam generator tube rupture
+	SLOCA	small loss-of-coolant accident
+	TRANS	general transient

- The risk that is calculated is like a “risk spike” for the event.


where:

$\lambda(t)$ is the initiating event rate

$\Phi(t)$ is the conditional probability of core damage given the initiating event.

Note that the product $\lambda(t) \cdot \Phi(t)$ is the core damage frequency (or hazard rate). Further, since a PRA models many initiators, the overall core damage frequency is the summation of the product of each initiating event (λ_i) and its associated plant response (Φ_i).

Conditional Core Damage Hazard Rate

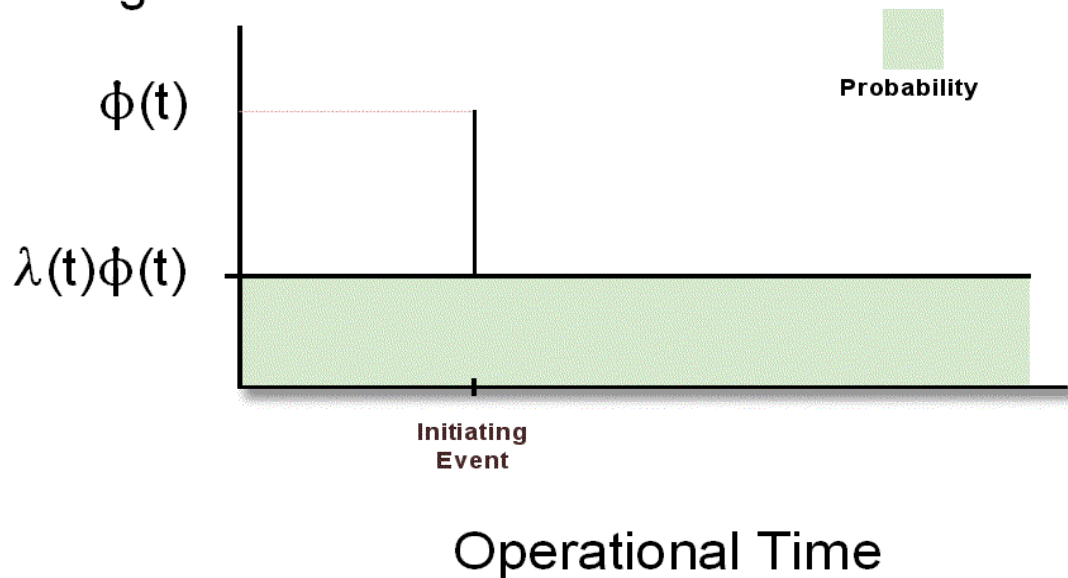

◇ The “risk spike” is the risk result given by the PRA model.

- The “risk spike” is not really a spike. The risk is more like a step function that returns to nominal conditions after the initiator scenario is completed (and the plant is returned to power operations).
 - Following an initiator, plant and operator responses will determine the likelihood of core damage.
 - Response time to deal with an initiating event varies from minutes to days.

- ◇ Looking more closely at the terms shown above:

$\lambda(t)$ represents the frequency of initiating events at the plant.

$\Phi(t)$ represents the systems that respond to an initiating event. That is, what is the probability that the plant's structures, systems, and components fail to prevent core damage.

- ◇ Multiple, simultaneous component or system outages at the time of the initiator should be modeled by mapping the outage into the model.
- For actual event evaluations, the analyst will normally use the available PRA models in conjunction with additional resources.
 - ◇ Plant or system drawings, descriptions, and modeling notebooks.
 - ◇ Final Safety Analysis Reports, individual plant examinations, and plant source books.
 - ◇ Event reports.
 - ◇ Discussion with cognizant personnel.

3.2 Treatment of Initiating Events

- For initiating event assessments, the initiating events in a model must be modified to reflect the event in question.
 - ◇ First, those initiators that did not occur are set to a FALSE (zero probability) house event.
 - Since initiating events are ANDed with other basic events in the sequence cut sets, sequences with a FALSE house event in every cut set will not show up in the results.
 - Alternatively, one could set the probability of the initiators that do not occur to a value of zero (this will also remove sequences).

- ◇ Second, for the initiator that did occur, its value should be modified depending on the type of initiator, either (a) non-recoverable or (b) recoverable.

(a) NON-RECOVERABLE INITIATORS:

Set the initiating event to a TRUE house event (1.0).

For example, in the case where a loss of a vital DC bus occurs, *and if* there is no chance of recovering the bus, the initiating event should be set to a TRUE house event.


(b) RECOVERABLE INITIATORS

Set the initiating event to a representative “nonrecovery” probability.

For example, in the case where offsite power is lost and it is recovered (i.e., is recoverable), then the initiator should be set to its short-term nonrecovery probability. (The current SPAR models assume $t=0$ and the short-term nonrecovery probabilities are accounted for in the initiating events. Therefore, the initiating events are set to 1.0.)

Section 7 discusses recovery actions in more detail.

- ◇ Based upon the information provided in the event documentation (e.g., LER), the analyst must determine whether or not the initiator is considered to be recoverable.
- ◇ In summary, for initiating event assessment, the initiating events should be modified according to the flow diagram below.

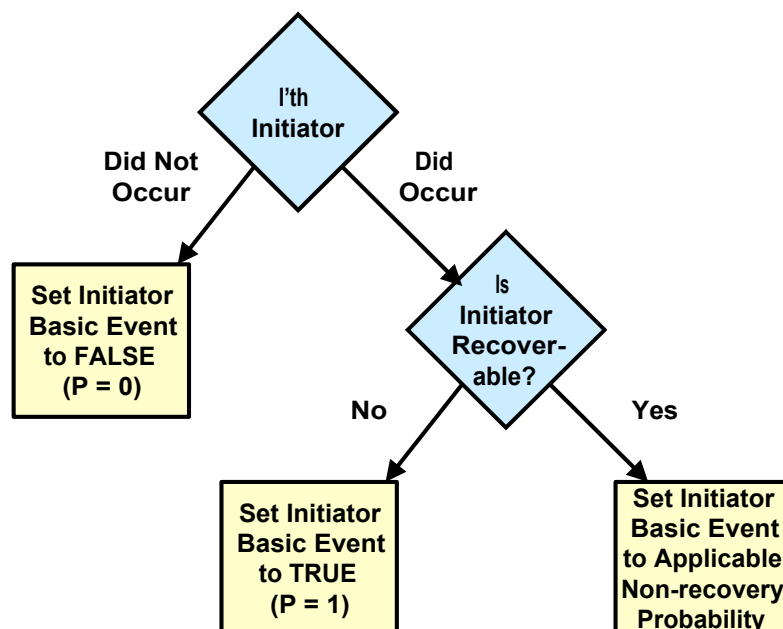

3.3 Treatment of Component Recovery

- The components or systems that are inoperable at the time the initiator occurs need to be evaluated in order to determine whether they are recoverable.
 - ◇ If a component or system is not recoverable, it (and its nonrecovery event, if present) should be set to TRUE.²
 - Remember that setting a component or system to a TRUE house event indicates that the component or system is failed (i.e., not able to perform its intended function).
 - Failed components or systems will not show up in the resulting sequence cut sets. Rather, the TRUE house event will alter the logic that is used in the PRA model.
 - Reasons why a component or system may not be recoverable include:
 - Nonrepairable component failure
 - Harsh environment (e.g., high radiation, high temperature)
 - Location (e.g., inside containment versus outside)
 - Timing/staffing limitations
 - ◇ If a component or system **is** recoverable, its associated nonrecovery basic event should be set to an appropriate nonrecovery probability. If a nonrecovery event is not present, then the analyst may have to add a nonrecovery event to the model. Note that merely setting the component event to the estimated nonrecovery probability will cause an undesired effect on common-cause failure probability if the component is a member of a component group whose common-cause failure probability is calculated automatically by the SAPHIRE plug-in.
 - The component or system nonrecovery probability is generally estimated using a human reliability method (e.g., SPAR-H).
 - Section 7 provides additional discussion on aspects related to nonrecovery modeling and probability determination.
 - Recoverable components or systems are generally those that were actually recovered during the course of the event.


²This may affect a common-cause failure probability calculated by SAPHIRE. This potential is being ignored for now. Adjustments to common-cause are considered in a Section 6.

- But, if a component or system is not recovered for a particular event, it is not automatically categorized as nonrecoverable.
- If a failed component is not needed in order to prevent core damage (possibly because some other component or system did not fail), plant operators may not immediately attempt to recover the failed component or system.

3.4 Treatment of Component Common Cause Failures

- Many PRA models have common cause failures included in the fault tree logic.
 - ◇ These common cause failure events are generally either train-level or component-level events.

An example of component-level common cause failure events (from a SPAR model) are shown below.

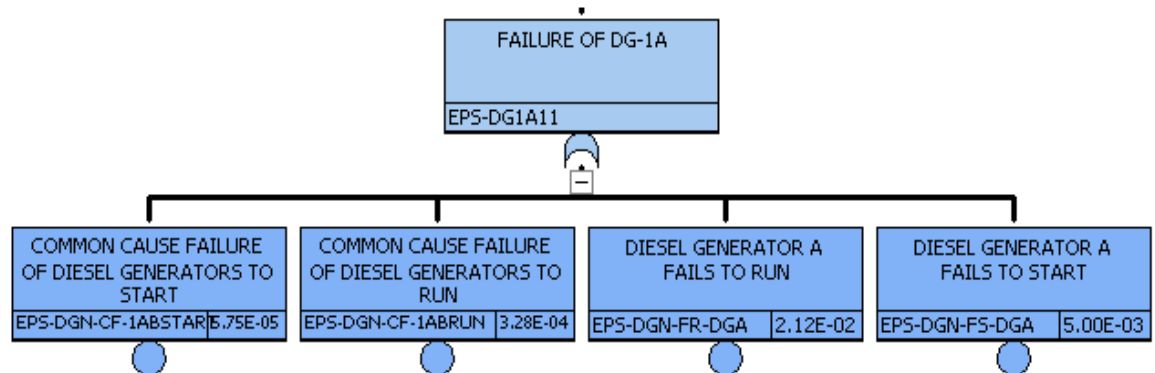

In the figure, the diesel generators have both a common cause "fails to start" and a "fails to run" basic event.

- ◇ For those components or systems which are operable (or in standby and are potentially operable) at the time of the initiating event, no modifications are needed for their common cause failure parameters.
- ◇ Recall that we are not attempting to quantify "what WAS the probability" of an event.
- ◇ Instead, we are attempting to estimate "what IS the probability" conditional upon the incident, or in other words, how close was the incident to proceeding to a PRA-type consequence.

- If a component or train is inoperable at the time of the initiating event, three steps must be performed.
 1. Identify the failure attributes (i.e., cause factors) for inoperable equipment to determine how to treat the failed component.
 2. Calculate new common cause failure probability based upon failure criteria (if the common-cause module in SAPHIRE is *not* used).
 3. Modify the common cause failure probability in the PRA model (if the common-cause module in SAPHIRE is *not* used).
- We will discuss specifics of the common cause probability modifications in Section 6, “Treatment of Common Cause Events.”

Summary:

The adjustment of the PRA model to account for event specifics is important.

Items such as non-recovery probabilities and the probability of common-cause failure have a direct impact on the bottom-line results.

3.5 *Appropriate Risk Measure for Initiating Event Assessment*

- The risk measure for **initiating event** assessments is the CCDP.
 - ◇ This measure is conditional upon both
 - A particular initiating event occurring (and the others not occurring)
 - Components, trains, or systems that are degraded or inoperable at the time the initiator occurs.
- An event importance (i.e., $\text{Importance}_{\text{event}}$) is not calculated for initiating event assessments.
 - ◇ The determination of the CDP may not be obvious (e.g., is instantaneous probability or the probability over a short duration needed?).
 - ◇ The CDP for an initiating event assessment would be like an instantaneous risk measure.

Summary:

When presented with an initiating event assessment, the overall results will be in the form of a CCDP.

3.6 *Workshop*

4. CONDITION ASSESSMENTS

Section 4 discusses the theory behind performing condition assessments. Condition assessments are analyses for events where a system or component was known to be degraded or inoperable for a certain length of time, during which no initiating event occurred.

Learning Objectives

- Explain a condition assessment and the steps taken for the treatment of initiating events in a condition assessment.
- State the appropriate risk measure for a condition assessment.

Section 4 Topics

- 4.1 Introduction
- 4.2 Treatment of Initiating Events for Condition Assessments
- 4.3 Treatment of Components for Condition Assessments
- 4.4 Treatment of Common Cause Failures
- 4.5 Appropriate Risk Measure for Condition Assessments
- 4.6 Workshop


Notes for this Section



4.1 Introduction

- Event evaluations are performed in order to quantify the risk due to a particular event.
 - ◇ For condition assessments, the risk arises due to
 - A component or system (or more than one) being degraded or inoperable for a certain length of time, during which no initiating event occurred.
 - The “length of time” is the duration over which the risk is calculated.


Conditional Core Damage Hazard Rate

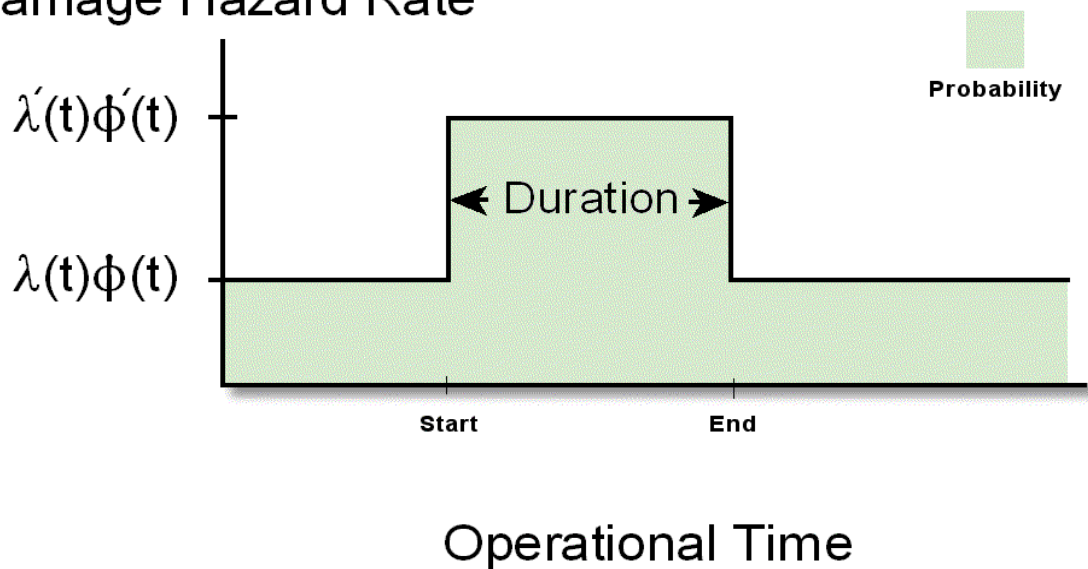

- Again, $\lambda(t)$ is the initiating event rate and $\Phi(t)$ is the conditional probability of core damage given an initiating event.
 - ◇ The product of these two terms is the core damage frequency.

- The core damage frequency is assumed to be constant over the duration of the event.
 - ◇ This constant ($\lambda' \Phi'$) is the *conditional* risk result given by the PRA model.
 - ◇ If the configuration changes (say due to maintenance, testing, or other failures), then we have a new risk level.
 - “Risk monitors” map individual plant configurations into the PRA over the course of days or weeks for use in outage planning.
- Note that risk monitors typically **exclude** basic events that represent test/maintenance outages as probabilities (i.e., the average unavailability over the year due to test/maintenance).
- Important component or system outages that occur over the entire duration of the event **will be** modeled. Incidental component outages (either risk-insignificant components or very short duration events) may not be modeled.
- ◇ The time-varying core damage hazard rate is, for condition assessments, assumed to be constant over the duration of interest.

Conditional Core Damage Hazard Rate

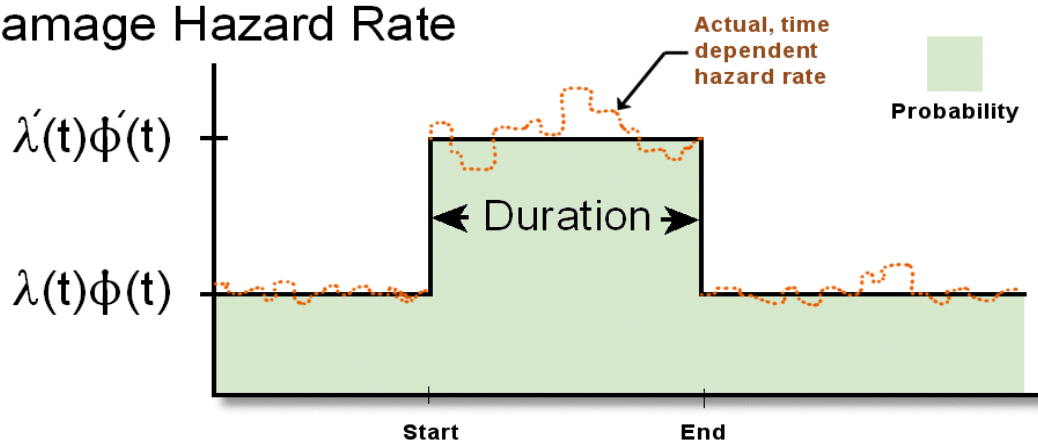


Operational Time

- For a condition assessment, a cumulative “risk profile” *could* be constructed based upon the results of the event evaluations that are performed.

- ◇ The cumulative, time-dependent CDP curve shown in the following figure is constructed by knowing that the cumulative failure probability is:

$$F(t) = 1 - e^{-\int_0^t \lambda(t)\phi(t)dt}$$

where we estimated the core damage frequency $[\lambda'(t)\Phi'(t)]$ from 0 to time t .

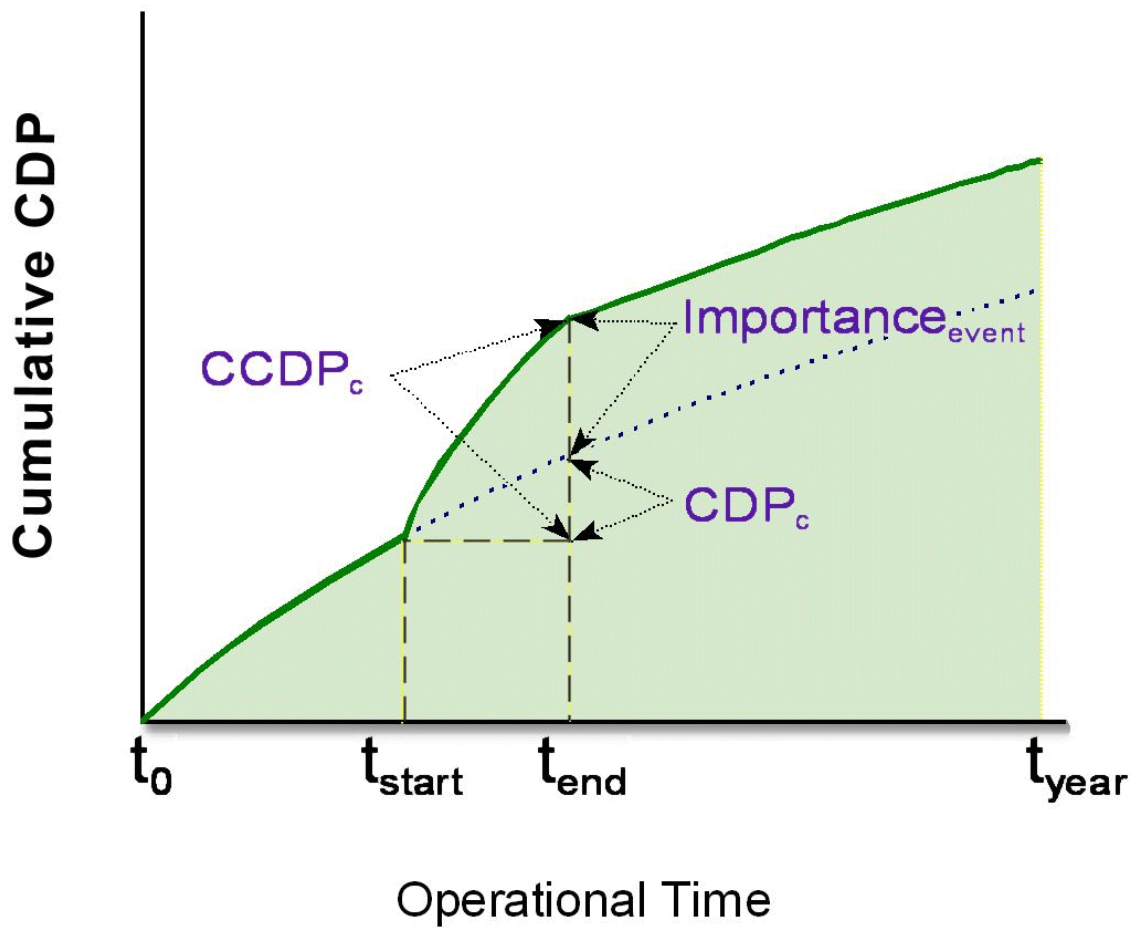

4.2 Treatment of Initiating Events for Condition Assessments

- For a condition assessment, it is assumed that none of the initiating events (as modeled in the PRA) actually occurred.
 - ◇ Although no initiator occurred, there is still a probability that any of the initiating events could have occurred during the duration of the event.
 - Consequently, we need to account for this probability that an initiating event could have occurred.
 - ◇ The initiator probabilities are necessary even if the event duration is very short compared to the expected arrival rates of the initiating events.
 - The probability of more than one initiator is usually negligible, but the calculation for the initiator probability accounts for such situations.
 - An initiator does not lead to core damage without subsequent failure of plant safety systems (hence the formulation of $\lambda\Phi$).
 - This calculation assumes that the initiator, if it occurred, would reveal the condition.
- Assuming that the arrival of an initiating event can be modeled as a standard Poisson (think random) process, we can estimate the probability of core damage as

$$P(\text{core damage}) = 1 - e^{-\int_0^T \lambda(t)\phi(t)dt}$$

$$P(\text{core damage}) = 1 - e^{-\lambda\phi T}$$

where:

$\lambda(t)$ is the arrival rate of the initiating event (with units of inverse time)

$\Phi(t)$ is the probability of the accident sequence cut sets

T is the duration (with units of time).

This calculation assumes that $\lambda(t)$ and $\Phi(t)$ are constant over time T .

- ◇ The approximation $(1 - e^{-\lambda\Phi T}) \approx \lambda\Phi T$ is valid for the equation above as long as the product $\lambda\Phi T$ has a value less than 0.1.

4.3 *Treatment of Components for Condition Assessments*

- The components or systems that are inoperable during the *entire* duration need to be evaluated in order to determine whether they are potentially recoverable.
 - ◇ The treatment of components for condition assessments is identical to that presented for initiating event assessment (Section 3.3). Section 7 provides additional detail specific to non-recovery probability determination.

4.4 *Treatment of Component Common Cause Failures*

- The treatment of common cause failures is the same as that in the initiating event assessment section (Section 3.4). Section 6 provides additional detail specific to conditional common cause probability determination.

4.5 *Appropriate Risk Measure for Condition Assessments*

- The risk measure for **condition assessments** is the increase in core damage probability, or “event importance” (i.e., $\text{Importance}_{\text{event}}$).

$$\text{Importance}_{\text{cond}} = \text{CCDP} - \text{CDP}$$

where;

CCDP is the **conditional** core damage probability

CDP is the **nominal** core damage probability.

- ◇ This measure is conditional upon both
 - The probability of any initiating event occurring during the event duration.
 - Components, trains, or systems that are degraded or inoperable for the duration of the event.
- Both the CCDP and CDP are available from the evaluation.
 - ◇ The CDP is the nominal core damage probability over the event duration.
 - No specific component outages are modeled in the CDP evaluation.
 - A risk monitor will typically have all test and maintenance unavailabilities set to zero for the CDP calculation.

- Component outages (specific to the incident) are modeled in the CCDP evaluation.

Summary:

When presented with a condition assessment, the results will generally be in the form of an “event (condition) importance.”

At this point, let us review the two types of event evaluations

Item	Assessment Type	
	Initiating Event Assessment	Condition Assessment
<i>Unique Attributes</i>	Initiating Event HAPPENS (at a point in time)	One or more component/system are degraded or inoperable for some duration of time ($t_2 - t_1$) Initiating event did not occur
<i>Treatment of Initiating Events</i>	Set initiator to TRUE or non-recovery probability for the initiating event that occurred. Others initiators are set to FALSE.	$CCDP = 1 - e^{(-\sum_i \lambda_i \Phi_i T)}$ where, $\lambda_i = i'th$ initiator frequency $\Phi_i = P(CD i'th$ initiator) $T = duration$ of condition Note that λ_i may increase from the nominal value if conditions impact likelihood of seeing an initiating event. For example, outage of one service water pump may increase the likelihood of losing the service water system.
<i>Treatment of Components</i>	Failed components → TRUE and adjust CCF. Degraded components → increased failure probability Non-failed components → leave at their nominal failure probabilities	Failed components → TRUE and adjust CCF. Degraded components → increased failure probability Non-failed components → leave at their nominal failure probabilities
<i>Risk Metric</i>	CCDP	CCDP - CDP

4.6 *Workshop*

5. EVENT EVALUATION AND SAPHIRE

Section 5 describes how SAPHIRE can be used to perform both initiating event and condition assessments.

Learning Objectives


- Demonstrate proficiency with SAPHIRE by performing workshop exercises related to an initiating event and condition assessment.

Section 5 Topics

- 5.1 Overview of Steps Involved in the Analysis
- 5.2 Steps for Event Evaluation in SAPHIRE
- 5.3 Modifying the Nominal PRA Model
- 5.4 Workshop

5.1 Overview of Steps Involved in the Analysis

- In this section, we will discuss how to use SAPHIRE to perform limited event assessments. We will demonstrate the steps involved, namely:
 1. Define the event assessment by constructing a "change set."
 2. Apply the change set to the data.
 3. Solve the applicable accident sequences.
 4. Report the results.
- Note that SAPHIRE reports accident sequence **frequency** (for the sequence analysis) – it is up to the analyst to calculate applicable probabilities (e.g., CCDP) using these frequencies. Later, we will see how the SAPHIRE Workspace automates this probability calculation.
- We will use the DEMO project (DEMO-SDP-C). A simplified diagram of the plant modeled by the DEMO project is shown below. We will perform a condition assessment where DG-A is out of service for 876 hours (1/10th of a year).

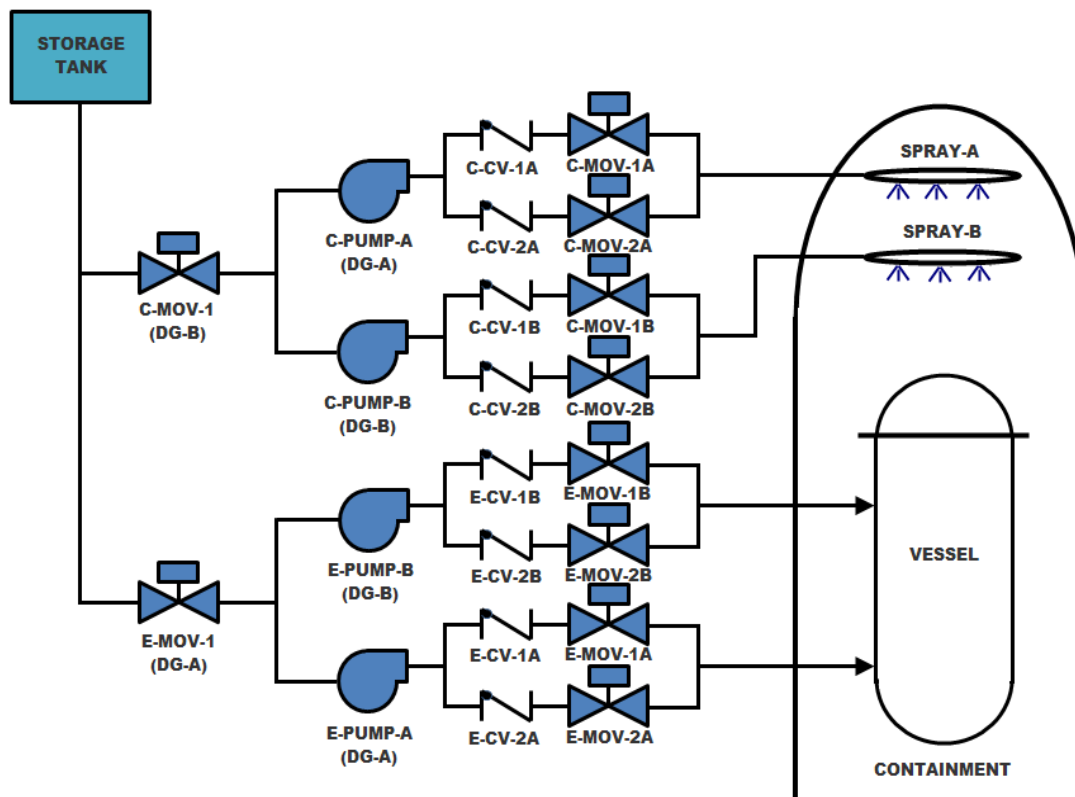

5.2 Steps for Event Evaluation in SAPHIRE

- First, we need to make a change set in SAPHIRE. Change sets are "data filters" that allow us to adjust the nominal (or base) probabilities to new, case-specific values.
- We will use the DEMO project (DEMO-SDP-C) for this example, so make sure it is selected.
- In this example, we need to fail the DG-A basic event (EPS-DGN-FS-A). Note this version of the DEMO project has offsite power recovery events and CCF events. For this simple evaluation, what should we do with these events??? (Section 6 and 7 will go into details about these events.)
- To make the change set, select View and then check **Change Sets** so this list panel will show on the left side of SAPHIRE.


◇ To create a Change Set, double click the **New Change Set** and enter the Change Set name and description.

◇ To make a data change in the Change Set, drag the diesel generator basic event (EPS-DGN-FS-A) and drop it into the Single tab field.


◇ Now, click the basic event in the **Singles** field to expand out the options in the **Values to be Applied** field.

◇ In the **Values to be Applied** field check the Failure Model box and click the text field next to this option to get a drop down box.

◇ To fail the diesel generator, change the "Failure Model" to **TRUE (house event true)**. Click **OK** to exit and return to the list of change sets.

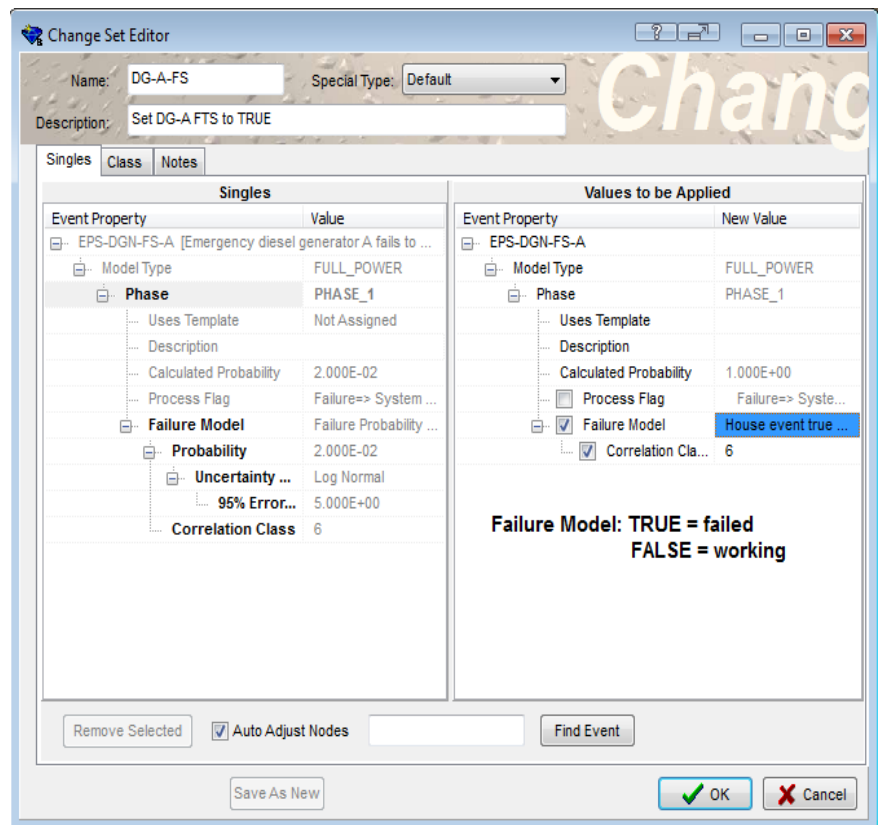


- ◇ At this point, we have made the change set and set the diesel generator fails to start to failed. We still need to "mark" the change set so we can use it.
- To use a change set, the box in front of the change set needs to be selected.
 - ◇ Once the box is checked a number will appear.
 - ◇ Since we only have one change set, we should **see the** number 1 next to the change set, indicating that it will be applied first. Once a number shows up the change set is invoked and the data change will be used in the cut set generation.
- Now we need to solve our accident sequences.
 - ◇ Highlight the all of the event trees.
 - ◇ Click the right mouse button and then select the **Solve** option.
 - Solve uses the event tree and fault tree logic associated with the sequences. The sequence frequency is quantified using the minimal cut set upper bound approximation.
 - Accept the default solve options.

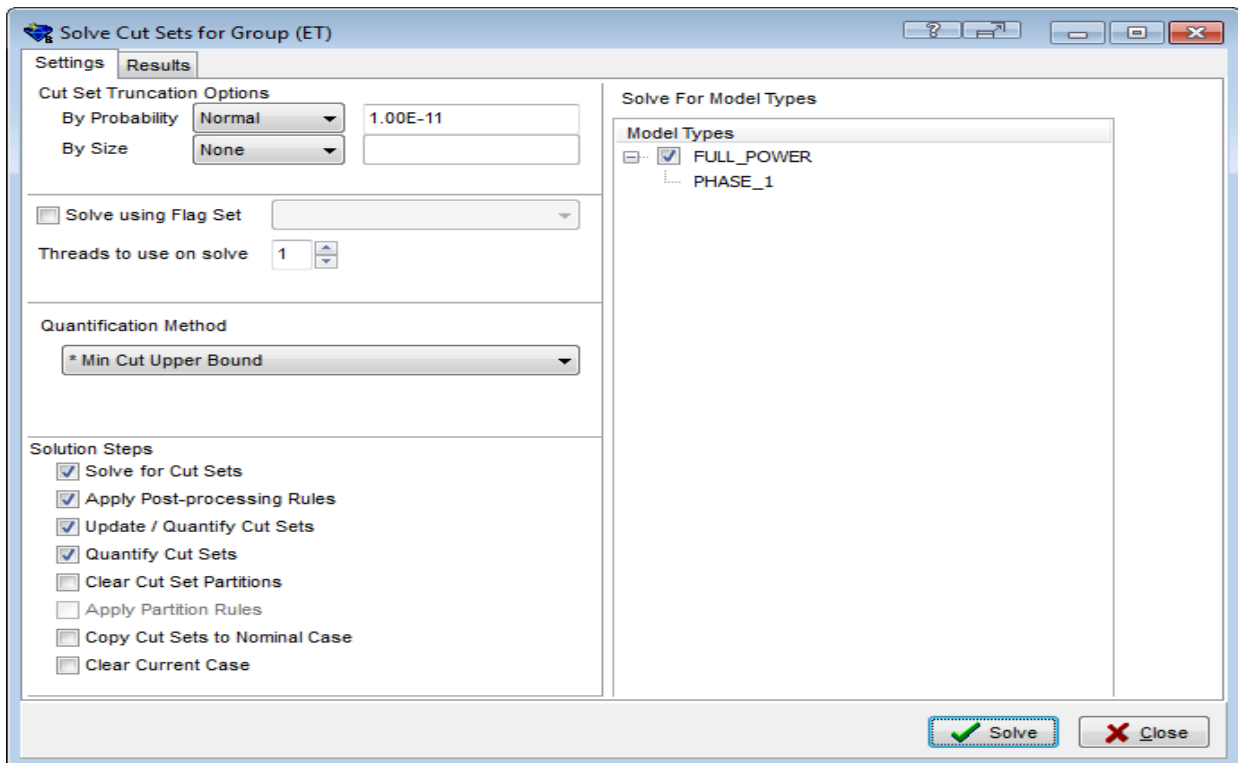

- ◇ Click the **Solve** button to solve the sequence minimal cut sets.

- We now need to view our results.


◇ With the event tree still highlighted, click the right mouse button and then select the **View Summary Results** option. A screen similar to that below should appear.

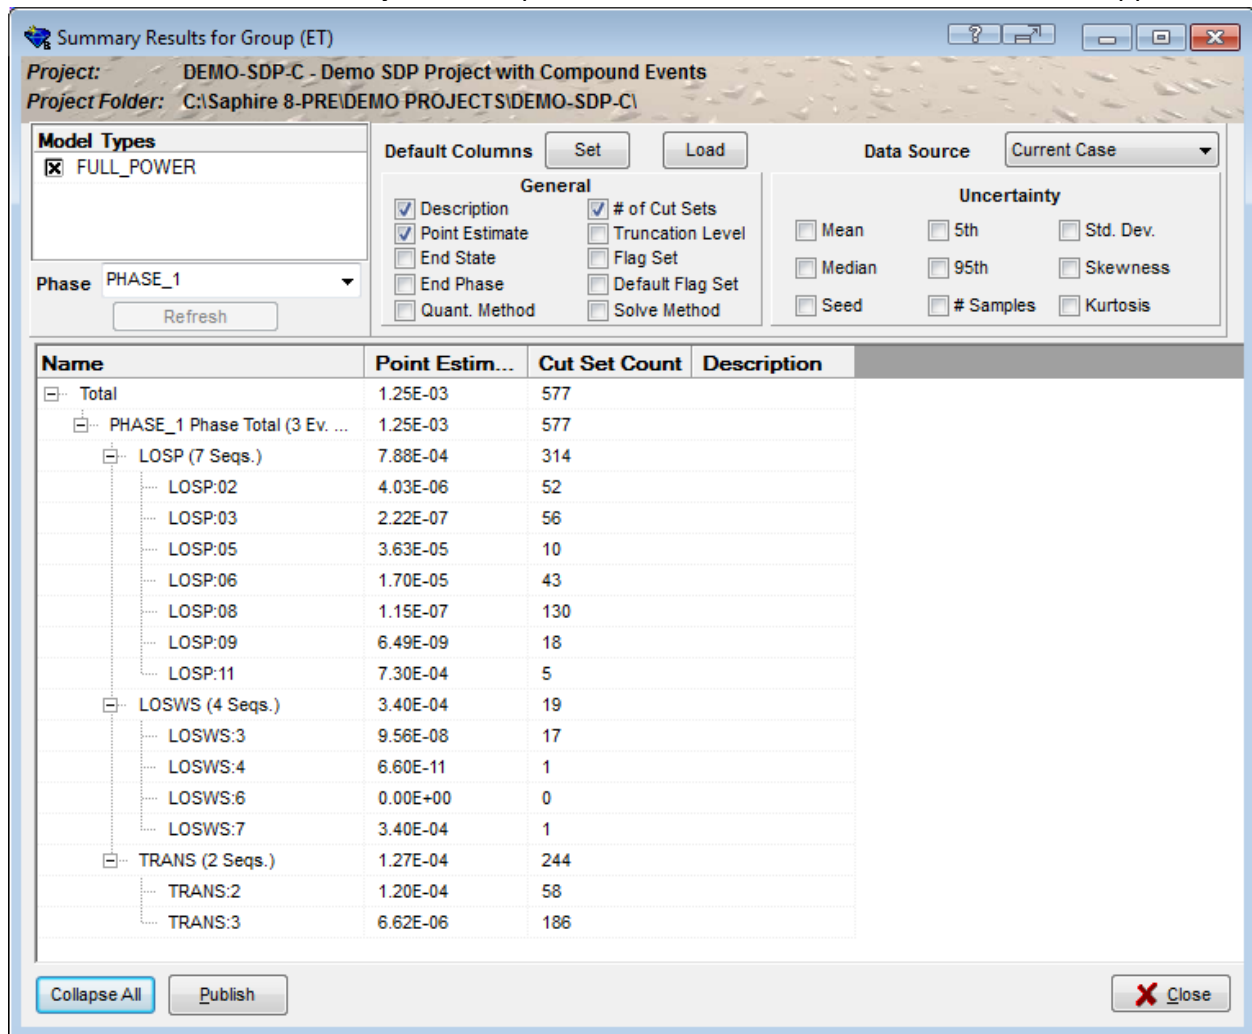

◇ The results of the analysis are shown above (Current Case).

– This result is a *frequency*, a frequency of core damage, in units of per year.

◇ The nominal results of our PRA are shown when the Data Source drop down option has the "Nominal Case" selected.

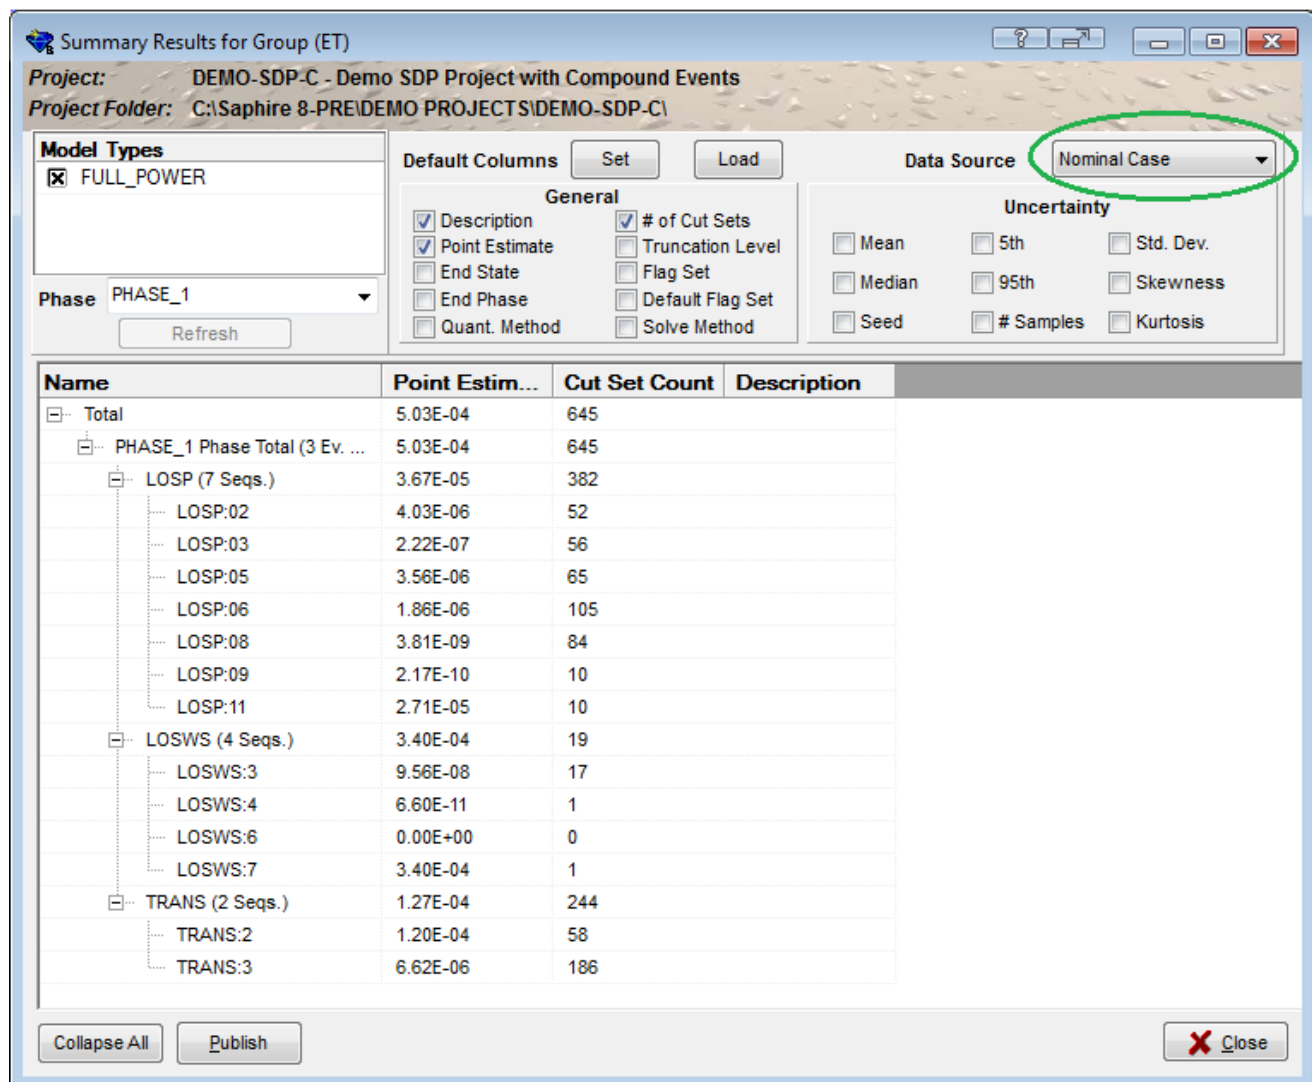

◇ The Nominal Case results are shown above.

- The traditional risk measure for **condition assessments** is the “event importance” (i.e., $\text{Importance}_{\text{event}}$).

◇ Recall that the event importance for core damage is

$$\text{Importance}_{\text{event}} = \text{CCDP} - \text{CDP}$$

Where : CCDP is the conditional core damage probability
 CDP is the nominal core damage probability.

– So, how do we get the CCDP and CDP from the related frequencies?

- Recall that if we know the frequency of a Poisson process, we can calculate the probability of the associated event (say core damage) by

$$P(\text{core damage}) = 1 - \exp\left[-\int_0^T \lambda(t)\Phi(t)dt\right]$$

$$= 1 - \exp(-\lambda\Phi T)$$

Where: $\lambda\Phi$ is the core damage frequency.

- Consequently, one can find CCDP and CDP by:

$$CCDP = 1 - e^{-(1.25E-03 / yr)(0.1 yr)} = 1.25E-04$$

$$CDP = 1 - e^{-(5.03E-04 / yr)(0.1 yr)} = 5.03E-05$$

- And then...

$$\text{Importance}_{\text{event}} = 1.25E-04 - 5.03E-05 = 7.47E-05$$

5.3 *Modifying the Nominal PRA Model*

- In some situations, you may wish to modify the underlying or “nominal” PRA model.
 - ◇ For example, perhaps the frequency of transients is updated for the model...this frequency would replace the existing transient value.
 - ◇ For details of how to make this modification, refer to the SAPHIRE Basics course manual.
- In SAPHIRE, to change the nominal data, double click the basic event in the Basic Events list panel and then make the appropriate changes. Resolve the model with the “**Copy to Nominal Case**” box checked.

5.4 *Workshop*

6. TREATMENT OF COMMON-CAUSE EVENTS

Section 6 reviews common cause failure modeling in PRA, discusses the calculations performed by the CCF module in SAPHIRE, and describes adjustments to CCF probabilities used in event evaluation.

Learning Objectives

- Understand the Basic Parameter Model for common cause failure and the alpha-factor method used to quantify it in the SPAR models.
- Explain the guidelines for common cause failure probability adjustments for a two- or three-train system for the following cases:
 - ◇ Failure with common-cause potential,
 - ◇ Failure without common-cause potential (independent failure),
 - ◇ Component outage for preventive maintenance or testing.

Section 6 Topics

- 6.1 Introduction
- 6.2 Review of Basic Parameter Model and Alpha-Factor Method
- 6.3 Common Cause Issues for Event Evaluations
- 6.4 Adjusting CCF Probabilities
- 6.5 Workshop

Notes for this Section

Additional information on common-cause modeling can be found in the P-200 course material and in the RASP Handbook, Vol. 1.



6.1 Introduction

- Common cause failure modeling, a subset of dependent failure analysis, is covered in detail in the course *System Modeling Techniques for PRA (P-200)*.
 - ◇ Common cause failure analysis attempts to model failures of multiple components due to causes that are not captured explicitly in the PRA.
 - Recall, for example, a power supply common to multiple components would be included in the PRA fault trees; this type of dependency is not a common cause failure.
 - ◇ Common cause failures frequently appear as one of the dominant failure events for redundant trains.
 - Since nuclear power plants have high levels of redundancy, minimal cut sets containing common cause failures tend to be among the most dominant contributors to risk.
- Since the time of WASH-1400, several methods of common cause failure modeling have been proposed. These methods all rely on the Basic Parameter Model and include
 - ◇ Beta Factor method
 - ◇ Multiple Greek Letter method
 - ◇ Alpha Factor method
- Common cause modeling is an important issue for event assessment.
 - ◇ A component failure may impact the probability that other like components could fail due a common cause mechanism. Thus, we need to estimate the "conditional" common cause failure probability for the impacted group of redundant components.
 - ◇ Testing and maintenance outages will affect the common cause failure probabilities.
 - ◇ The nominal PRA value of a common cause basic event is valid only for the nominal configuration.
 - Changes to component configuration (e.g., failure, test, maintenance) impacts the common-cause potential.

- When a component is disabled (either failed or purposely removed from service), the context of the PRA changes.
 - ◇ In general, the disabled component will fall into one of three categories.
 1. Actual or potential **common cause** failure, or information is insufficient to judge (default category)
 2. A **testing or preventive maintenance** outage (not due to a failure)
 3. **Independent failure**. (requires conclusive evidence to justify).

6.2 Review of Basic Parameter Model and Alpha-Factor Method

A common cause component group (CCCG) is a group of redundant components (redundant in design, function, environment, etc.) judged to be vulnerable to common cause failure. The Basic Parameter Model partitions the total failure probability of each component in the CCCG into independent and common cause contributors. We illustrate this partitioning for a CCCG with three components:

$$A_T = A_I \cup C_{AB} \cup C_{AC} \cup C_{ABC}$$

$$B_T = B_I \cup C_{AB} \cup C_{BC} \cup C_{ABC}$$

$$C_T = C_I \cup C_{AC} \cup C_{BC} \cup C_{ABC}$$

If the success criterion for the CCCG is that one of the three components must operate, then the minimal cut sets for the CCCG are

$$\{A_I, B_I, C_I\}, \{A_I, C_{BC}\}, \{B_I, C_{AC}\}, \{C_I, C_{AB}\}, \text{ and } \{C_{ABC}\}.$$

The Basic Parameter Model assumes that the probabilities of similar events involving similar components are the same. This approach takes advantage of the physical symmetries associated with identical redundant components in reducing the number of parameters that need to be quantified. Thus, we set $A_I = B_I = C_I = Q_1$. Similarly, we have $C_{AB} = C_{AC} = C_{BC} = Q_2$ and $C_{ABC} = Q_3$. The failure probability for the CCCG can then be written as

$$Q_1^3 + 3Q_1Q_2 + Q_3$$

Had the success criterion been two-out-of-three, the failure probability for the CCCG would become

$$3Q_1^2 + 3Q_2 + Q_3$$

[SAPHIRE uses the second two terms ($3*Q_2 + Q_3$ or $3*Q_1*Q_2+Q_3$) in these equations as the probability of the CCF event for that CCCG. This probability is calculated directly from the CCF plug-in module in SAPHIRE. The independent components are modeled in fault trees.]

The Q_k s are not estimated directly. Rather, estimated parameters are introduced. This leads to the various approaches listed in the Introduction (e.g., beta factor). The SPAR models use the most recent of these, the **alpha-factor method**.

The parameters in the alpha-factor method are Q_t , the total failure probability for a component, defined as in the Basic Parameter Model, and α_k , which is the fraction of failures in the CCCG that involve failure of k components. Thus, α_1 is the fraction of failures that are independent (no common-cause), α_2 is the fraction of failures in which two components fail due to common cause, etc.

For a staggered-testing scheme, that is, one in which the components in the CCCG are not all tested at the same time, one can write the Q_k s as follows, where m is the number of components in the CCCG:

$$Q_k^{(m)} = \frac{1}{\binom{m-1}{k-1}} \alpha_k Q_t$$

For a non-staggered testing scheme, that is, one in which the components in the CCCG are tested at the same (or close) time, one can write the Q_k s as follows, where m is the number of components in the CCCG:

$$Q_k^{(m)} = \frac{k}{\binom{m-1}{k-1}} \frac{\alpha_k}{\alpha_t} Q_t \quad \text{where: } \binom{m-1}{k-1} = \frac{(m-1)!}{(k-1)!(m-k)!}, \quad \alpha_t = \sum_{k=1}^m k \alpha_k$$

[The inputs to the CCF plug-in in the current version of SAPHIRE are the testing scheme (default is staggered for SPAR models), the size of the CCCG (m), the failure criterion, Q_t , and the α_k s. SAPHIRE then automatically calculates the probability of the CCF event, which represents failure of all components in the CCCG, using the above equations.]

6.3 *Common Cause Issues for Event Evaluations*

- Frequently, in the application of many common cause models, all the combinations of common cause and independent failures may not be included.
 - ◇ Including all combinations increases the complexity of the models while only increasing the common cause probability by a few percent.
 - ◇ Also, most PRAs do not include common cause events for all components. For example, in the SPAR models, the components that do have common cause events include (only if they have to change states, e.g., open, start):
 - Air operated valves
 - Diesel generators
 - Heat exchangers
 - Motor driven pumps
 - Motor operated valves
 - Turbine driven pumps
 - ◇ While components that may not have common cause events include:
 - Manual valves
 - Relief valves
 - Safety valves
- When performing an event evaluation, we need to worry about three different cases.
 - I. **Common cause** failure or insufficient information
 - These affect the inoperable component but the failure mechanism may have the potential to impact the other redundant components.
 - II. **Independent** failure
 - These effectively reduce the redundancy of the system. In other words, we have one less redundant component, but the remaining components may still fail due to either independent failures or a common cause failure.
 - III. **Testing/Maintenance** outage(s)
 - Scheduled preventive maintenance and testing outages fall into this category.

- Like the "independent failure" case above, these outages reduce the redundancy of the system due to the component(s) being made unavailable.
 - Testing or maintenance caused failures **do not** belong in this category and would generally be put into another category.
- In practice, it is difficult to distinguish between a component that has suffered a potential common cause failure and one that has failed independently.
 - ◇ Assuming a common-cause type of failure (**Case I**) leads to the highest (most conservative) CCDF or event importance.
 - ◇ Assuming independent failure (**Case II**) or test/maintenance outages (**Case III**) leads to the lowest (least conservative) CCDF or event importance.
 - One must make a judgment call as to the potential failure scenario on each event evaluation.
 - ◇ As a default, one should assume **Case I** is applicable.
 - ◇ If the failure definitely could not have been shared by the other redundant components (if the situation happened again and again), then **Case II** is applicable.
 - ◇ The NRC is working on guidance to help distinguish independent failures. A draft NUREG/CR is being reviewed to help provide guidance (not sure on when it will be published) and this guidance will be incorporated into the RASP Handbook.
 - ◇ Further, one should consider running a sensitivity calculation where the common cause assumption is varied in order to determine the potential impact on the overall results.

6.4 Adjusting CCF Probabilities

In the SPAR models, some components have more than one failure mode in addition to test and maintenance unavailability. For example, a component (e.g., motor-driven pump) that must change state and perform a function for a specified period of time will have two failure modes: failure to start and failure to run. There will be a CCF event for both of these failure modes and this complicates the algebra in what follows.

6.4.1 Two Trains - Failure with Common Cause Potential

For a two-train CCG, letting R denote failure to run, and S failure to start, we have the following nominal minimal cut sets:

$$S = \{A_I^R B_I^R, A_I^S B_I^S, A_I^R B_I^S, A_I^S B_I^R, C_{AB}^R, C_{AB}^S\}$$

The nominal CCF probability is thus

$$S = \{C_{AB}^R, C_{AB}^S\}$$

$$P(CCF) = Q_2^S + Q_2^R$$

Assume that component A fails to start, and we cannot conclude that the failure was independent of component B. Applying the definition of conditional probability, we have

$$P(S | A_t^s) = \frac{P(S \cap A_t^s)}{P(A_t^s)} \quad A_t^s = A_t^s \cup C_{AB}^S$$

$$= ([A_I^S B_I^S \cap (A_t^s \cup C_{AB}^S)] \cup [A_I^S B_I^R \cap (A_t^s \cup C_{AB}^S)] \cup [A_I^R B_I^R \cap (A_t^s \cup C_{AB}^S)] \cup [A_I^R B_I^S \cap (A_t^s \cup C_{AB}^S)] \cup [C_{AB}^R \cap (A_t^s \cup C_{AB}^S)] \cup [C_{AB}^S \cap (A_t^s \cup C_{AB}^S)])$$

expand out and apply Boolean reduction ($A_I^R \cap A_t^s = \phi$)

$$= \frac{P(A_I^S B_I^S \cup A_I^S B_I^R \cup A_t^s C_{AB}^R \cup C_{AB}^S)}{P(A_t^s)}$$

$$= \frac{(Q_1^S)^2}{Q_t^S} + \frac{Q_1^S Q_1^R}{Q_t^S} + \frac{Q_1^S Q_2^R}{Q_t^S} + \frac{Q_2^S}{Q_t^S} \quad Q_t = \alpha_1 Q_t + \alpha_2 Q_t = Q_1 + Q_2$$

$$= \alpha_1^S (Q_1^S + Q_1^R) + \alpha_1^S Q_2^R + \alpha_2^S$$

So the conditional CCF probability becomes approximately α_2^S .

To explain, what has happened is that the observed failure of A to start, with CCF potential, has not affected the total failure probability of component B, which includes C_{AB}^R . Even though we saw a failure to start of component A, there may be causes that would result in a failure to run, which are shared with component B, and contribute to the total failure probability of B.

The above information is the exact operation for a two-train system and two failure modes modeled; however, the real models (SPAR/Utility PRA) are too complex to handle that type of calculation. Therefore, from this point forward all calculations will be evaluated on a single failure mode, which is how SAPHIRE will perform the CCF adjustments.

SAPHIRE 8 will **eventually** automate all adjustments, once a component (failure mode) is selected.

(Currently, SAPHIRE makes the following adjustments:

- If the CCF basic event uses the R-calc type, the unobserved failure mode (e.g., fails to run) will have its CCF event's probability remain at the nominal value.
- If the CCF basic event uses the C-calc (compound), then SAPHIRE sets the unobserved failure mode to 1.0 (i.e., train A fails to run) and recalculates the CCF probability, which becomes the total failure probability, $Q_{T\cdot}$)

Therefore, the analyst should (must) modify basic events as follows (for this example):

- ◇ Set the independent basic event representing the observed failure to TRUE (i.e., fails to start). SAPHIRE will automatically update the CCF event.
- ◇ Set the CCF basic event for the unobserved failure mode (failure to run in our example) to FALSE. Without this second adjustment, SAPHIRE will keep the fails-to-run CCF event at its nominal value.
 - Why this second adjustment should be performed is the FTR probability that is input for the basic event is Q_r . Therefore, if the CCF event is not set to FALSE the result will be slightly over estimated (i.e., $B-FTR + CCF-FTR$; where $B-FTR = B-FTR_1 + CCF-FTR$).

Example Calculation

- The above example is based on using the system cut sets (just the two failure modes) and then evaluating those cut sets conditional on a failure. The **SPAR models and SAPHIRE does not** perform that exact type of calculation, instead the failure modes are independent and the conditional calculation is on the individual failure mode.

SAPHIRE approach to Two-Train Example

- ◇ If the observed failure is failing to start (failure to run would be similar) with a potential shared cause, SAPHIRE would make the following adjustment:

$$Pr(C_{AB}^S | A_t^S) = \frac{Pr(C_{AB}^S \cap A_t^S)}{Pr(A_t^S)}$$

$$C_{AB}^S \cap A_t^S = \{C_{AB}^S\}$$

$$\therefore Pr(C_{AB}^S | A_t^S) = \frac{Q_2^S}{Q_t^S} = \frac{\alpha_2^S Q_t^S}{\alpha_1^S Q_t^S + \alpha_2^S Q_t^S} = \frac{\alpha_2^S Q_t^S}{(\alpha_1^S + \alpha_2^S) Q_t^S} = \alpha_2^S \quad \text{where: } (\alpha_1^S + \alpha_2^S) = 1$$

When using the ECA or SDP workspace, the analyst should adjust **just the seen failure mode** and SAPHIRE will perform the CCF update automatically on the seen failure mode. However, in the general analysis workspace (or change sets), the analyst **may** have to adjust multiple basic events to represent the failure of train A failing to start.

If adjusting the basic event manually is **required**, the following modifications are needed:

A - Fails to start = TRUE
 A - Fails to run = 1.0
 A - Test and Maintenance = TRUE
 CCF A&B to start = α_2
 CCF A&B to run = FALSE

- In the ECS fault tree in the DEMO-SDP model, there are CCF basic events called ECS-MDP-CF-FS and ECS-MDP-CF-FR.

- ◇ The event ECS-MDP-CF-FS would have a nominal failure probability of
 $P(ZA-MDP-FS-02A02) * P(ECS-MDP-FS-B) = 7.50E-5$.
- ◇ What would $P(ECS-MDP-CF-FS)$ be if we observed a failure of the B ECS pump to start during a test, and we could not rule out the potential for CCF of the A pump?

$P(ECS-MDP-CF-FS)$ should become $P(ZA-MDP-FS-02A02) = 2.50E-2$.

In SAPHIRE, we would obtain this by setting ECS-MDP-FS-B to TRUE.

6.4.2 Two Train – Independent Failure of One Component

SAPHIRE approach to Two-Train Example

If the observed failure is failing to start (failure to run would be similar) without a potential shared cause, SAPHIRE would make the following adjustment:

$$P_r(C_{AB}^S | A_I^S) = \frac{Pr(C_{AB}^S \cap A_I^S)}{P_r(A_I^S)}$$

$$C_{AB}^S \cap A_I^S = \{A_I^S C_{AB}^S\}$$

$$\therefore P_r(C_{AB}^S | A_I^S) = \emptyset$$

$$= 0 \text{ (FALSE)}$$

When using the ECA or SDP workspace, the analyst should adjust just the seen failure mode (i.e., independent failure). However, in the general analysis workspace (or change set), the analyst may have to adjust multiple basic events to represent the failure of train A (independent fails to start).

If manual adjustment to the basic event is **required**, the following modifications should be performed:

A - Fails to start = TRUE

A - Fails to run = 1.0

A - Test and Maintenance = TRUE

CCF A&B to start = FALSE

CCF A&B to run = FALSE

Based on the ECS example and the settings discussed above, if failure of pump B to start was judged to be independent, set the basic event ECS-MDP-FS-B to TRUE and both CCF events (ECS-MDP-CF-FR and ECS-MDP-CF-FR) are set to FALSE. The CCF events need to be set to FALSE because the SPAR models use Q_t rather than Q_1 for failure of B, so we to avoid double-counting the CCF for failure to run.

6.4.3 Two Trains - Test or Maintenance Outage

Finally, if one of the components is out of service for preventive maintenance or testing, then we cannot observe a failure of that component to start or run. Assuming this is the A component, this reduces the level of redundancy by one, so the probability that the CCCG fails becomes just $B_t^R + B_t^S$. Removing component A from service has not affected the total failure probability of component B: $B_t = B_l + C_{AB}$. Note that C_{AB} still contributes to B_t . Even though we cannot observe CCF of both components with one out of service for test or maintenance, the causes that could lead to CCF are still present and contribute to the total failure probability of the remaining component.

[To model this in SAPHIRE (if using change sets or general analysis workspace), the analyst would, continuing the ECS example from earlier, set the test-and-maintenance event for pump A (ECS-MDP-TM-A) to 1.0 (not TRUE), and set both CCF events to FALSE. Next, generate cut sets. Setting the test-and-maintenance event to 1.0 allows recovery rules to be applied to properly remove combinations that would be disallowed by Technical Specifications. However, the resulting cut sets are not minimal. To get minimal cut sets, go back and set ECS-MDP-TM-A to TRUE and perform a cut set update; do not regenerate cut sets.]

SAPHIRE approach to Two-Train Example

If a component is out for test and maintenance:

$$\begin{aligned} \therefore P_r(C_{AB}^S | A_I) &= \emptyset \quad P_r(C_{AB}^R | A_I) = \emptyset \\ &= 0 \text{ (FALSE)} \end{aligned}$$

The analyst sets the test and maintenance event to TRUE and the CCF events to FALSE. This modification is used since the SPAR model basic event probability is Q_{total} which implies that the basic events that are left (B_{FTS} and B_{FTR}) include both the individual and CCF portions of Q_{total} . The following modifications are required:

A - Fails to start = 1.0
 A - Fails to run = 1.0
 A - Test and Maintenance = TRUE
 CCF A&B to start = FALSE
 CCF A&B to run = FALSE.

6.4.4 Three Trains - Potential CCF

SAPHIRE approach to Three-Train Example with single component failure and CCF potential

SAPHIRE works with just one failure mode at a time when it performs its conditional calculation. Therefore, the cut sets that SAPHIRE conditions on are shown below for a single failure mode:

$$CS = \left\{ A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, C_{ABC}^S \right\}$$

If the observed failure is failing to start with a potential shared cause, SAPHIRE would make the following adjustment:

$$Pr(CS|A_t^S) = \frac{Pr(CS \cap A_t^S)}{Pr(A_t^S)}$$

$$CS \cap A_t^S = \{ A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, C_{ABC}^S \}$$

$$Pr(CS|A_t^S) = \frac{Pr(CS \cap A_t^S)}{Pr(A_t^S)}$$

$$CS \cap A_t^S = \{ A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, C_{ABC}^S \}$$

$$\begin{aligned} \therefore Pr(CS|A_t^S) &= 3 \left(\frac{\alpha_1^S Q_t^S \cdot 1/2 \alpha_2^S Q_t^S}{\alpha_1^S Q_t^S + 1/2 \alpha_2^S Q_t^S + 1/2 \alpha_2^S Q_t^S + \alpha_3^S Q_t^S} \right) + \frac{\alpha_3^S Q_t^S}{\alpha_1^S Q_t^S + 1/2 \alpha_2^S Q_t^S + \alpha_1^S Q_t^S + 1/2 \alpha_2^S Q_t^S + \alpha_3^S Q_t^S} \\ &= \frac{3}{2} \alpha_1^S \alpha_2^S Q_t^S + \alpha_3^S \end{aligned}$$

When using the ECA or SDP workspace, the analyst should adjust just the seen failure mode. However, in the general analysis (or change sets), the analyst may have to adjust multiple basic events to represent the failure of train A.

If manual adjustment to the basic event is **required**, the following modifications should be performed:

A - Fails to start = TRUE

A - Fails to run = 1.0

A - Test and Maintenance = TRUE

CCF A&B&C to start $\approx \alpha_3$

CCF A&B&C to run $= \alpha_1 \alpha_2 (Q_t^R)^2 + (1/2) \alpha_2 Q_t^R + \alpha_3 Q_t^R$ (assume run CCF still exists)

[To approximate the correct answer using the SAPHIRE plug-in, the analyst must set the observed independent failure event to TRUE and the independent failure event for the unobserved failure mode to 1.0, as listed above.]

Example Calculation

- In the DEMO-SDP model, there are CCF basic events called CCS-MDP-CF-FS1 and CCS-MDP-CF-FR1 (created just for this example).

- ◇ The event CCS-MDP-CF-FS1 would have a nominal failure probability of

$$\frac{3}{2} \alpha_1^s \alpha_2^s (Q_t^s)^2 + \alpha_3^s Q_t^s$$

Using the values in the DEMO-SDP model, this equation gives a nominal probability of 4.74E-05. The analogous expression for failure to run gives a nominal probability for event CCS-MDP-CF-FR1 of 1.52E-06.

Alpha-FTS	FTS	Alpha-FTR	FTR
$\alpha_1 = 9.65\text{E-}01$	3.0E-03	$\alpha_1 = 9.81\text{E-}01$	2.4E-04
$\alpha_2 = 1.92\text{E-}02$		$\alpha_2 = 1.31\text{E-}02$	
$\alpha_3 = 1.57\text{E-}02$		$\alpha_3 = 6.32\text{E-}03$	

- ◇ What would P(CCS-MDP-CF-FS1) become if we observed a failure of the B CCS pump to start, and we could not rule out the potential for CCF of the A or C pumps?

Set CCS-MDP-FS-A to TRUE and CCS-MDP-FR-A to 1.0. The adjusted value of CCS-MDP-CF-FS1 is 1.58E-02. Note also that the value of CCS-MDP-CF-FR1 has increased slightly, to 3.09E-06. Setting CCS-MDP-FR-B to 1.0 has caused the CCF probability for failure to run to be adjusted to $2Q_1Q_2 + Q_2 + Q_3$. (*SAPHIRE calculates the CCF to 3.09E-06 if using the **R-calc** type when the component is set to 1.0 and calculates the CCF event to $(Q_1)^2 + Q_2 + Q_3$ [3.14E-06] if using the **C-calc** when the component is set to 1.0.*)

6.4.5 Three Trains - Independent Failure

SAPHIRE approach to Three-Train Example with single component failure and no CCF potential

SAPHIRE works with just one failure mode at a time when it performs its conditional calculation. Therefore, the cut sets that SAPHIRE conditions on are shown below for a single failure mode:

$$CS = \left\{ A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, C_{ABC}^S \right\}$$

If the observed failure is failing to start with a no potential shared cause, SAPHIRE would make the following adjustment:

$$P_r(CS|A_I^S) = \frac{P_r(CS \cap A_I^S)}{P_r(A_I^S)}$$

$$CS \cap A_I^S = \{A_I^S C_{BC}^S\}$$

$$P_r(CS|A_I^S) = \frac{P_r(CS \cap A_I^S)}{P_r(A_I^S)}$$

$$\begin{aligned} \therefore P_r(CS|A_I^S) &= \left(\frac{\alpha_1^S Q_t^S \cdot 1/2 \alpha_2^S Q_t^S}{\alpha_1^S Q_t^S} \right) \\ &= \frac{1}{2} \alpha_2^S Q_t^S \end{aligned}$$

When using the ECA or SDP workspace, the analyst should adjust just the seen failure mode. However, in the general analysis workspace (or change sets), the analyst may have to adjust multiple basic events to represent the failure of train A.

If manual adjustment to the basic event is **required**, the following modifications should be performed:

A - Fails to start = TRUE

A - Fails to run = 1.0

A - Test and Maintenance = TRUE

CCF A&B&C to start = $(1/2) \alpha_2 Q_t^S$

CCF A&B&C to run = $\alpha_1 \alpha_2 (Q_t^R)^2 + (1/2) \alpha_2 Q_t^R + \alpha_3 Q_t^R$ (assume run CCF still exists)

In the current version of SAPHIRE, this can be approximated by setting the independent basic events for both failure modes to 1.0. Note that this will result in non-minimal cut sets. The analyst will have to ensure that the results are reasonable. *(SAPHIRE currently overestimates the final CCF basic event when using the Compound type calculation. When setting an independent components probability to 1.0 (for independent failure or T&M), SAPHIRE generates the following cut sets and calculates the CCF probability as $(Q_1)^2 + Q_2 + Q_3$.)*

6.4.6 Three Trains - Test or Maintenance Outage

SAPHIRE approach to Three-Train Example with a single component unavailable due to T & M

SAPHIRE works with just one failure mode at a time when it performs its conditional calculation. Therefore, the cut sets that SAPHIRE conditions on are shown below for a single failure mode:

$$CS = \left\{ A_I C_{BC}, B_I C_{AC}, C_I C_{AB}, C_{ABC} \right\}$$

If a component is unavailable due to testing or preventative maintenance, SAPHIRE would make the following adjustment (using a general approach):

$$S \cap C_I = \{C_I A_I C_{BC}, C_I B_I C_{AC}, C_I C_{ABC}\}$$

$$\therefore P_r(S|C_I) = \frac{\overline{Q_1} Q_1 Q_2}{\overline{Q_1}} + \frac{\overline{Q_1} Q_1 Q_2}{\overline{Q_1}} + \frac{\overline{Q_1} Q_3}{\overline{Q_1}}$$

$$= 2Q_1 Q_2 + Q_3$$

$$\therefore P_r(S \cap C_I) = 2Q_1 Q_2 + Q_3$$

The Q_1 term is modeled in the fault tree; therefore, this term can be dropped from the CCF adjustment. The probability for the two failure mode CCF events **should be adjusted** as, since **SAPHIRE** does not make these adjustments automatically:

A - Test and Maintenance = (1.0 first and then TRUE)

CCF A&B&C to start = $2 * (\alpha_1 Q_t^S) * (1/2) \alpha_2 Q_t^S + \alpha_3 Q_t^S$

CCF A&B&C to run = $2 * (\alpha_1 Q_t^R) * (1/2) \alpha_2 Q_t^R + \alpha_3 Q_t^R$

In the current version of SAPHIRE, this can be approximated by setting the independent basic events for both failure modes to 1.0. Note that this will result in non-minimal cut sets. The analyst will have to ensure that the results are reasonable. (*SAPHIRE currently overestimates the final CCF basic event when using the Compound type calculation, since it calculates the CCF probability as $(Q_1)^2 + Q_2 + Q_3$.*)

6.4.6 Full CCF calculations - two failure modes (just for reference only)

Two-train independent failure

Next assume that we observe a failure to start of component A, but there is no potential for CCF. Now we must condition on an observed **independent** failure of A to start. Again applying the definition of conditional probability, we have (reduced down)

$$\begin{aligned} P(S | A_t^S) &= \frac{P(A_t^S B_t^S \cup A_t^S B_t^R \cup A_t^S C_{AB}^R)}{P(A_t^S)} \\ &= P(B_t^S) + P(B_t^R) + P(C_{AB}^R) = Q_1^S + Q_1^R + Q_2^R \\ &= Q_1^S + Q_t^R \end{aligned}$$

Because the failure was independent, any cut sets involving CCF for failure to start are removed. Thus, we are left with an independent failure of B to start and a total failure of B to run.

Three-train dependent failure

For a three-train CCCG with two failure modes, the algebra is more complicated, but the basic principles still apply. For a one-of-three success criterion, the minimal cut sets for the CCCG are

$$S = \left\{ \begin{array}{l} A_I^R B_I^R C_I^R, A_I^S B_I^R C_I^R, A_I^R B_I^S C_I^R, A_I^R B_I^R C_I^S, A_I^R B_I^S C_I^S, A_I^S B_I^R C_I^S, A_I^S B_I^S C_I^R, A_I^S B_I^S C_I^S, \\ A_I^R C_{BC}^R, B_I^R C_{AC}^R, C_I^R C_{AB}^R, A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, A_I^R C_{BC}^S, A_I^S C_{BC}^R, B_I^R C_{AC}^S, B_I^S C_{AC}^R, \\ C_I^R C_{AB}^S, C_I^S C_{AB}^R, C_{ABC}^S, C_{ABC}^R \end{array} \right\}$$

Thus, the nominal CCF probability is given by

$$S = \left\{ \begin{array}{l} A_I^R C_{BC}^R, B_I^R C_{AC}^R, C_I^R C_{AB}^R, A_I^S C_{BC}^S, B_I^S C_{AC}^S, C_I^S C_{AB}^S, A_I^R C_{BC}^S, A_I^S C_{BC}^R, B_I^R C_{AC}^S, B_I^S C_{AC}^R, \\ C_I^R C_{AB}^S, C_I^S C_{AB}^R, C_{ABC}^S, C_{ABC}^R \end{array} \right\}$$

$$P(CCF) = 3Q_1^R Q_2^R + 3Q_1^S Q_2^S + 3Q_1^R Q_2^S + 3Q_1^S Q_2^R + Q_3^S + Q_3^R$$

[One thing to notice about these cut sets is the presence of “failure mode cross-products,” such as $A_I^R C_{BC}^S$. Such terms are not included in the calculation of CCF probability by the SAPHIRE plug-in.]

If we observe a failure to start of component A, with CCF potential, we apply the definition of conditional probability, as before. After considerable Boolean algebra, the cut sets above reduce to those shown in the following table.

Table 1 Results for CCCG of size 3 conditioned on failure to start of component A with CCF potential (draft CCF NUREG and papers from Dana Kelly and et. all.)

Number	Cut Set	Cut Set Probability	Conditional Probability
1	S-ABC	4.710E-05	1.570E-02
2	B-S, S-AC	8.338E-08	2.779E-05
3	A-S, S-BC	8.338E-08	2.779E-05
4	C-S, S-AB	8.338E-08	2.779E-05
5	A-S, B-S, C-S	2.426E-08	8.087E-06
6	C-R, S-AB	6.780E-09	2.260E-06
7	B-R, S-AC	6.780E-09	2.260E-06
8	A-S, R-BC	4.550E-09	1.517E-06
9	A-S, R-ABC	4.391E-09	1.464E-06
10	A-S, B-R, C-S	1.973E-09	6.577E-07
11	A-S, B-S, C-R	1.973E-09	6.577E-07
12	A-S, B-R, C-R	1.604E-10	5.347E-08
13	R-AB, S-AC	4.527E-11	1.509E-08
14	R-BC, S-AC	4.527E-11	1.509E-08
15	R-AC, S-AB	4.527E-11	1.509E-08
16	R-BC, S-AB	4.527E-11	1.509E-08
17	R-ABC, S-AC	4.368E-11	1.456E-08
18	R-ABC, S-AB	4.368E-11	1.456E-08
19	A-S, C-S, R-AB	1.317E-11	4.390E-09
20	A-S, B-S, R-AC	1.317E-11	4.390E-09
21	A-S, C-R, R-AB	1.071E-12	3.570E-10
22	A-S, B-R, R-AC	1.071E-12	3.570E-10
Total		4.740E-05	1.580E-02

Dividing through by A_t^S gives the conditional probability of failure for the CCCG.

Three-train independent failure

If the observed failure of a component is judged to be independent, so there is no potential for CCF of other components in the CCCG, the cut sets reduce considerably from the nominal situation. Assume we have observed an independent failure to start of component A. The cut sets for failure of the CCCG become

$$\begin{aligned}
 S \cap A_t^S = & A_t^S B_t^R C_t^R \cup A_t^S B_t^R C_t^S \cup A_t^S B_t^S C_t^R \cup A_t^S B_t^S C_t^S \cup A_t^S B_t^R C_{AC}^R \cup A_t^S C_t^R C_{AB}^R \\
 & \cup A_t^S C_{BC}^S \cup A_t^S C_{BC}^R \cup A_t^S B_t^S C_{AC}^R \cup A_t^S C_t^S C_{AB}^R \cup A_t^S C_{ABC}^R
 \end{aligned}$$

In deriving this result we have applied the assumption that the Basic Parameter Model constitutes a partition of each failure mode. This leads to the elimination of cut sets such as $A_I^S C_I^R C_{AB}^S$.

The results of applying this calculation to our size-three example above are shown in the table below.

Table 2 Results for CCCG of size 3 conditioned on independent failure to start of component A (draft CCF NUREG and papers from Dana Kelly and et. all.)

Number	Cut Sets	Cut Set Probability	Conditional Probability
1	A-S, S-BC	8.338E-08	2.880E-05
2	A-S, B-S, C-S	2.426E-08	8.380E-06
3	A-S, R-BC	4.550E-09	1.572E-06
4	A-S, R-ABC	4.391E-09	1.517E-06
5	A-S, B-R, C-S	1.973E-09	6.815E-07
6	A-S, B-S, C-R	1.973E-09	6.815E-07
7	A-S, B-R, C-R	1.604E-10	5.541E-08
8	A-S, C-S, R-AB	1.317E-11	4.549E-09
9	A-S, B-S, R-AC	1.317E-11	4.549E-09
19	A-S, C-R, R-AB	1.071E-12	3.699E-10
1	A-S, B-R, R-AC	1.071E-12	3.699E-10
Total		1.207E-07	4.170E-05

Three-train test and maintenance

If we have one train in test and maintenance, say the A train, the cut sets for the CCCG reduce to the following (because A is unavailable to start or run):

$$S = \left\{ \begin{array}{l} B_I^R C_I^R, B_I^S C_I^R, B_I^R C_I^S, B_I^S C_I^S, \\ C_{BC}^R, B_I^R C_{AC}^R, C_I^R C_{AB}^R, C_{BC}^S, B_I^S C_{AC}^S, \\ C_I^S C_{AB}^S, B_I^R C_{AC}^S, B_I^S C_{AC}^R, C_I^R C_{AB}^S, C_I^S C_{AB}^R, \\ C_{ABC}^S, C_{ABC}^R \end{array} \right\}$$

Because the test-and-maintenance basic events are not inputs to the current SAPHIRE CCF plug-in, SAPHIRE will not automatically adjust the CCF probability. The CCF probability will need to be adjusted manually or set the independent failure modes (fails to run and fails to start) to 1.0 and then SAPHIRE will recalculate the CCF probability conditional on one component is unavailable.

6.5 *Workshop*

7. TREATMENT OF RECOVERY EVENTS

Section 7 describes the recovery analysis methods used in event evaluation. Recovery analysis estimates the probability that a component that has failed will not be restored. Recovery modeling is applicable to both initiating events and component failures.

Learning Objectives

- Understand the two categories of SPAR recovery modeling.
- Understand recovery for SPAR initiating events.
- AC power recovery for SPAR LOOP events (offsite power and diesel generator).
- Describe the four categories of LOOP events considered by the SPAR models.

Section 7 Topics

- 7.1 Introduction
- 7.2 Recovery of Initiating Events
- 7.3 Recovery of System/Component failures
- 7.4 Workshop

Notes for this Section

RCP reactor coolant pump
LOOP Loss of Offsite Power



7.1 Introduction

"Recovery analysis" is the process of estimating the probability that a failed component is not restored. As such, it is more appropriately called "nonrecovery analysis" (i.e., the probability that an operator does not restore the system or component).

- Event evaluation recovery modeling is broken down into two general categories:
 1. Recovery of initiating events (IEs). In the SPAR models, non-recovery probability is factored into the estimate of IE frequency for all initiators.
 2. Recovery of system/component failures. We have different types of recovery analysis, including:
 - ◇ Recovery of system/component failures using the SPAR-H methodology
 - ◇ Recovery of AC power system components (offsite power and diesel generators)
 - ◇ Modeling of reactor coolant pump (RCP) seal LOCA related events that are LOOP duration-dependent.
- In general, there are two methods of modeling recovery:
 1. One may include nonrecovery events in the logic models (fault or event trees). Thus, the basic events representing nonrecovery are distributed in the models just like other basic events.
 - Alternatively, the probability of nonrecovery may be included in the basic event's failure probability. The basic event would then represent the component failing AND the component is not recovered.
 2. One may want to append recovery events to the accident sequence cut sets, where recovery rules modify the cut sets after they have been generated from the logic models.
 - Recovery rules are discussed extensively in the Advanced SAPHIRE course. Note that the SPAR Rev. 8.15+ models use both of these approaches, as do many of the plant PRA models.

- Once recovery is applied to the model, the hard work begins, because you must estimate its probability. In the human reliability analysis (HRA) course (P-203), you will discuss methods used to estimate nonrecovery probabilities.

7.2 Recovery of Initiating Events

The General Model

- A general IE model can define the initiator frequency as

$$\lambda_{IE} = \lambda \cdot \mathbf{P(IE \text{ not recovered during time } t_{\text{short}})}$$

- ◊ λ is rate at which events of type IE are observed.
 - ◊ t_{short} is the time available before reactor coolant boil-off uncovers the reactor core. The interval t_{short} is plant specific and generally has a value close to 0.5 hours. (The current SPAR models incorporate this 0.5 hours into the non-recovery basic events; therefore, t_{short} is 0.0 and no longer developed into the initiating event.)
- Note that recovering events like IE-LOCA and IE-LOOP leads to a transient. The recovered sequences are not modeled because the resulting sequences would be of low probability compared to the existing TRAN sequences.
 - In the SPAR models, the IE nonrecovery probability is embedded in the frequency parameter (λ_{IE}) (i.e., calculated into frequency via data analysis).

LOOP Nonrecovery Probabilities

The SPAR Rev. 8.15+ models use a SAPHIRE “plug-in” for LOOP recovery – this calculation relies on basic events in the database to calculate the LOOP frequencies and offsite power nonrecovery probabilities.

- In the SPAR models the LOOP initiating event frequency (λ_T) is the sum of the frequencies of four individual LOOP categories:

$$\lambda_T = \sum_{i=1}^4 \lambda_i$$

- The four LOOP categories are:
 1. *Plant-centered* loss of offsite power. Failures include hardware failures, design deficiencies, human errors in maintenance and switching failures. Can be recovered by switching or repairing equipment.
 2. *Switchyard-centered* loss of offsite power. Failures that are caused by component failures or human actions in the plant switchyard.
 3. *Grid-related* loss of offsite power. Failures resulting from grid disturbances. Usually an unanticipated grid weakness, including physical disturbances of transmission lines (e.g., brush fires, earthquakes).
 4. *Weather-related* loss of offsite power. Failures resulting from major storms, tornados, hurricanes, high winds, etc.

Mode	LOOP Category	Data Period	Events	Plant-Level LOOP Frequency		
				Reactor Critical or Shutdown Years	Mean Frequency ^a	Frequency Units ^b
Critical operation	Plant-centered	1997–2010	2	1294.0	1.93E-03	/rcry
	Switchyard-centered	1997–2010	13	1294.0	1.04E-02	/rcry
	Grid-related	1997–2010	14	1294.0	1.22E-02	/rcry
	Weather-related	1986–2010	8	2171.4	3.91E-03	/rcry
	All		--	--	2.84E-02	/rcry
Shutdown operation	Plant-centered	1986–2010	23	435.9	5.16E-02	/rsy
	Switchyard-centered	1997–2010	10	156.5	6.71E-02	/rsy
	Grid-related	1986–2010	5	435.9	1.26E-02	/rsy
	Weather-related	1986–2010	16	435.9	4.02E-02	/rsy
	All		--	--	1.66E-01	/rsy

a. The mean is a Bayesian update using a Jeffreys prior. Mean = (0.5 + events)/(critical or shutdown years).

b. The frequency units are per reactor critical year (/rcry) or per reactor shutdown year (/rsy).

- The SPAR model event trees include offsite power nonrecovery events. The expression used for calculating the probability of failing to recover offsite power is given by

$$P_{OPRF}(t_{long} | t_{short}) = P(L > t_{long} | L > t_{short})$$

where:

L is the duration of a LOOP

t_{long} is a sequence-dependent time requirement that is greater than t_{short}

The most common application is to station blackout sequences (SBO) where

t_{long} = either a battery depletion time or a core uncover time.

t_{short} = short-term recovery interval based on the time to uncover the reactor core if no safety systems function (assume 0.0)

In the SPAR models t_{short} is most often **zero** unless there are multiple failures to recover offsite power events in a given sequence. In these sequences the first event calculation would use a t_{short} of zero and the remaining power recovery failure probabilities would be conditional on the previous failure event.

- We generalized the SPAR recovery so that the probabilities can be calculated when LOOP frequency and LOOP recovery information are divided into plant, switchyard, grid, and weather subclasses by frequency-weighting the class probabilities as follows

$$P_{OPRF}(t_{long} | t_{short}) = \frac{1}{\lambda_T} \sum_{i=1}^n \lambda_i \frac{(1 - F_{L_i}(t_{long}))}{(1 - F_{L_i}(t_{short}))}$$

where F_L is the distribution of durations (length of time in which offsite power is gone) for the i 'th category. Note that F is a cumulative distribution function.

- The model for the LOOP duration for a particular category is a lognormal distribution:

$$f_i(t) = \frac{1}{t\sqrt{2\pi}\sigma_i} \exp\left[-\frac{(\ln t - \mu_i)^2}{2\sigma_i^2}\right]$$

$$F_{L_i}(t) = \Phi\left[-\frac{(\ln(t) - \mu_i)}{\sigma_i}\right]$$

- Using the equations above, give the following general expressions for failure to recover offsite power at time t_{long} for LOOP class i , conditional on failure to recover offsite power at time t_{short}

$$P_{OPRF_i}(t_{long} | t_{short}) = \frac{\int_{t_{short}}^{\infty} f_{L_i}(l) dl}{\int_{t_{short}}^{\infty} f_{L_i}(l) dl} = \frac{1 - \phi\left[\frac{\ln(t_{long}) - u_i}{\sigma_i}\right]}{1 - \phi\left[\frac{\ln(t_{short}) - u_i}{\sigma_i}\right]}$$

- The equation above is presently applied when evaluating a specific class of LOOP, as in initiating event assessments where the class of initiating event is known. For the nominal case SPAR model, a frequency-weighted average recovery failure probability is required and the equation becomes

$$P_{OPRF}(t_{long} | t_{short}) = \frac{1}{\lambda_T} \sum_{i=1}^4 \lambda_i \frac{(1 - \phi(\frac{\ln(t_{long}) - u_i}{\sigma_i}))}{(1 - \phi(\frac{\ln(t_{short}) - u_i}{\sigma_i}))}$$

The values of μ and σ for the four LOOP categories can be found from the information shown below, which is taken from NUREG/CR-6890.⁴

Loop Category	Curve Fit Parameter	Curve Fit Parameter Mean	Underlying Distribution for Curve Fit Parameter	Mean ^a	Error Factor ^a
Plant Centered	Median	0.54	Lognormal	0.54	1.50
	Error Factor	10.1	Lognormal	10.1	1.60
Switchyard Centered	Median	0.712	Lognormal	0.712	1.31
	Error Factor	9.38	Lognormal	9.38	1.36
Grid Related	Median	1.51	Lognormal	1.51	1.54
	Error Factor	5.29	Lognormal	5.29	1.65
Weather Related	Median	2.71	Lognormal	2.71	2.16
	Error Factor	28.9	Lognormal	28.9	2.45
a. To perform an uncertainty analysis, the lognormal distributions are first sampled to obtain values for the curve fit parameters, which are then used to determine a sample estimate for the nonrecovery probability.					


Note: These are the current (SPAR model) curve fit parameters.

For each of the four categories, μ is given by the natural logarithm of the median. For example, for a plant-centered LOOP, we find $\mu = \ln(0.54) = -0.62$. The other parameter, σ , is given by $\ln(\text{Error Factor})/1.645$. For a plant-centered LOOP, we would find $\sigma = \ln(10.1)/1.645 = 1.41$. The table below converts the information above into values for μ and σ .

⁴This table includes information about the uncertainty in μ and σ , which we will not use in this course. This issue is addressed in *Advanced Topics in PRA* (P-501).

LOOP Category	μ	σ
Plant Centered	-0.62	1.41
Switchyard Centered	-0.34	1.36
Grid Related	0.41	1.01
Weather Related	0.996	2.05

The figure below shows how the probability of nonrecovery decreases with time for each of the four LOOP categories.

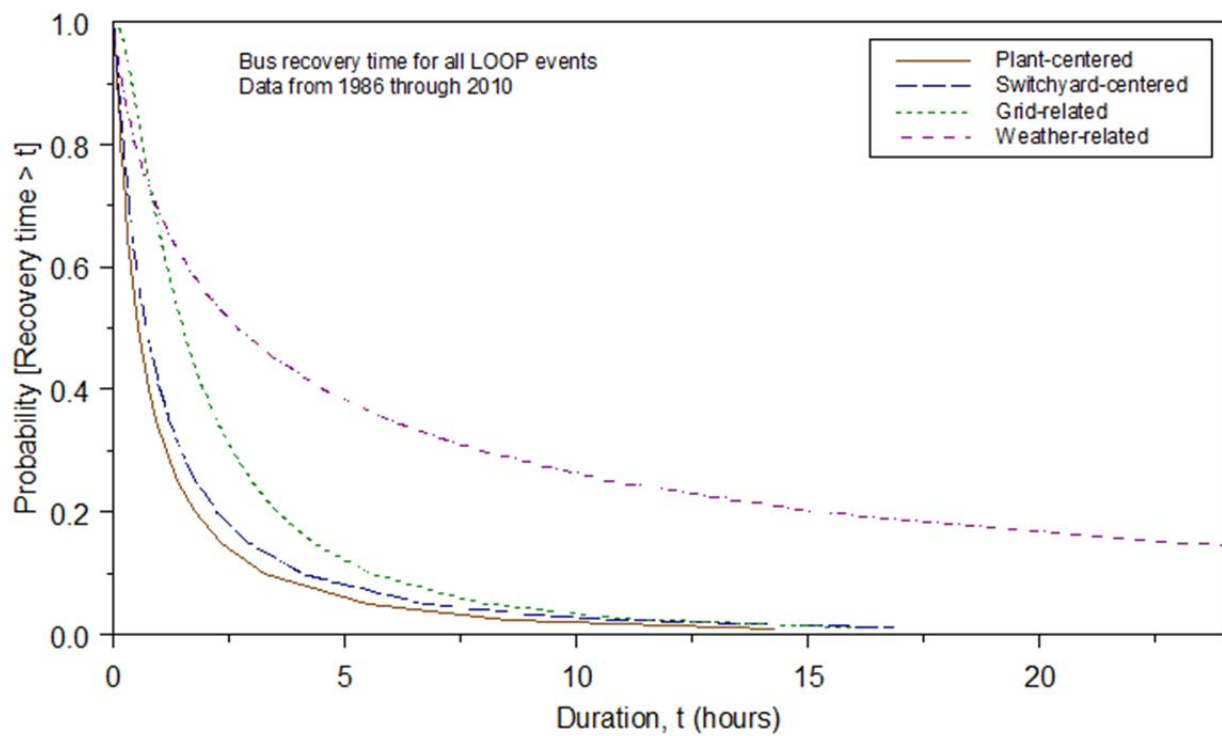

- These parameters and distributions for the LOOP duration events have been incorporated into the latest SPAR models. To use these, however, required development of a LOOP nonrecovery compound event calculation. This calculation is performed by calling the PLUG_4GROUPLoop.DLL library in SAPHIRE 8.

Item	Value
ModelType	RANDOM
Phase	CD
Uses Template	Not Assigned
Description	
Calculated Probability	3.386E-01
Process Flag	Failure=> System Logic Success=> Delete Term
Failure Model	Compound event (C)
Library	PLUG_4GROUPLoop
Procedure	NREC_4G_WEIGHTED_AVE
Input Parameters	
Recovery Time	2.000E+00
PC Lambda	ZV-LOOP-PC-LAMBDA
GR Lambda	ZV-LOOP-GR-LAMBDA
SC Lambda	ZV-LOOP-SC-LAMBDA
WR Lambda	ZV-LOOP-WR-LAMBDA
PC Median	ZV-SBO-REC-PC-MEDIAN
GR Median	ZV-SBO-REC-GR-MEDIAN
SC Median	ZV-SBO-REC-SC-MEDIAN
WR Median	ZV-SBO-REC-WR-MEDIAN
PC Err. Factor	ZV-SBO-REC-PC-EF
GR Err. Factor	ZV-SBO-REC-GR-EF
SC Err. Factor	ZV-SBO-REC-SC-EF
WR Err. Factor	ZV-SBO-REC-WR-EF
Correlation Class	

- Normally, the LOOP nonrecovery compound calculation weights the nonrecovery probability by the LOOP frequency. However, when using the SPAR model for an initiating event assessment, three of the LOOP frequency parameters are set to zero (indicating that type of LOOP did not occur) while one is set to a value of one. In this situation, the LOOP nonrecovery will represent just the LOOP that did occur and is not weighted by the other LOOP types.
- There is an effort to separate out the different LOOP categories in the SPAR models. Currently, about one-third or more SPAR models contain a different LOOP event tree for each category along with category specific offsite power recoveries.

7.3 *Recovery of System/Component Failures*

- Most system failures occur because an operator fails to start the system, or because a system component fails and is not recovered in the time available. This implies a general system fault tree of the form shown in Figure 1.

There are numerous methods used to quantify these recovery events, but we will mention two:

1. The SPAR models use simplified HRA tools, for example the SPAR HRA worksheets (SPAR-H).
 - a. SPAR-H discussed in Human Reliability Analysis (HRA) P-203 course.
2. Use of LOOP and DG-specific recovery curves to quantify station blackout and seal LOCA related probabilities. In the SPAR models, these events have "PRAish" names such as:

OEP-XHE-XL-NR30M OPERATOR FAILS TO RECOVER OFFSITE POWER IN 30 MINUTES

OEP-XHE-XL-NR01H OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR

EPS-XHE-XL-NR01H OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 1 HOUR

- Recovery events in the SPAR models can be included in one of three methods
 - Top Event of event tree (see Figure 2)
 - Basic event developed in the fault tree logic (see Figure 3)
 - Post-processing rules (see Figure 4)

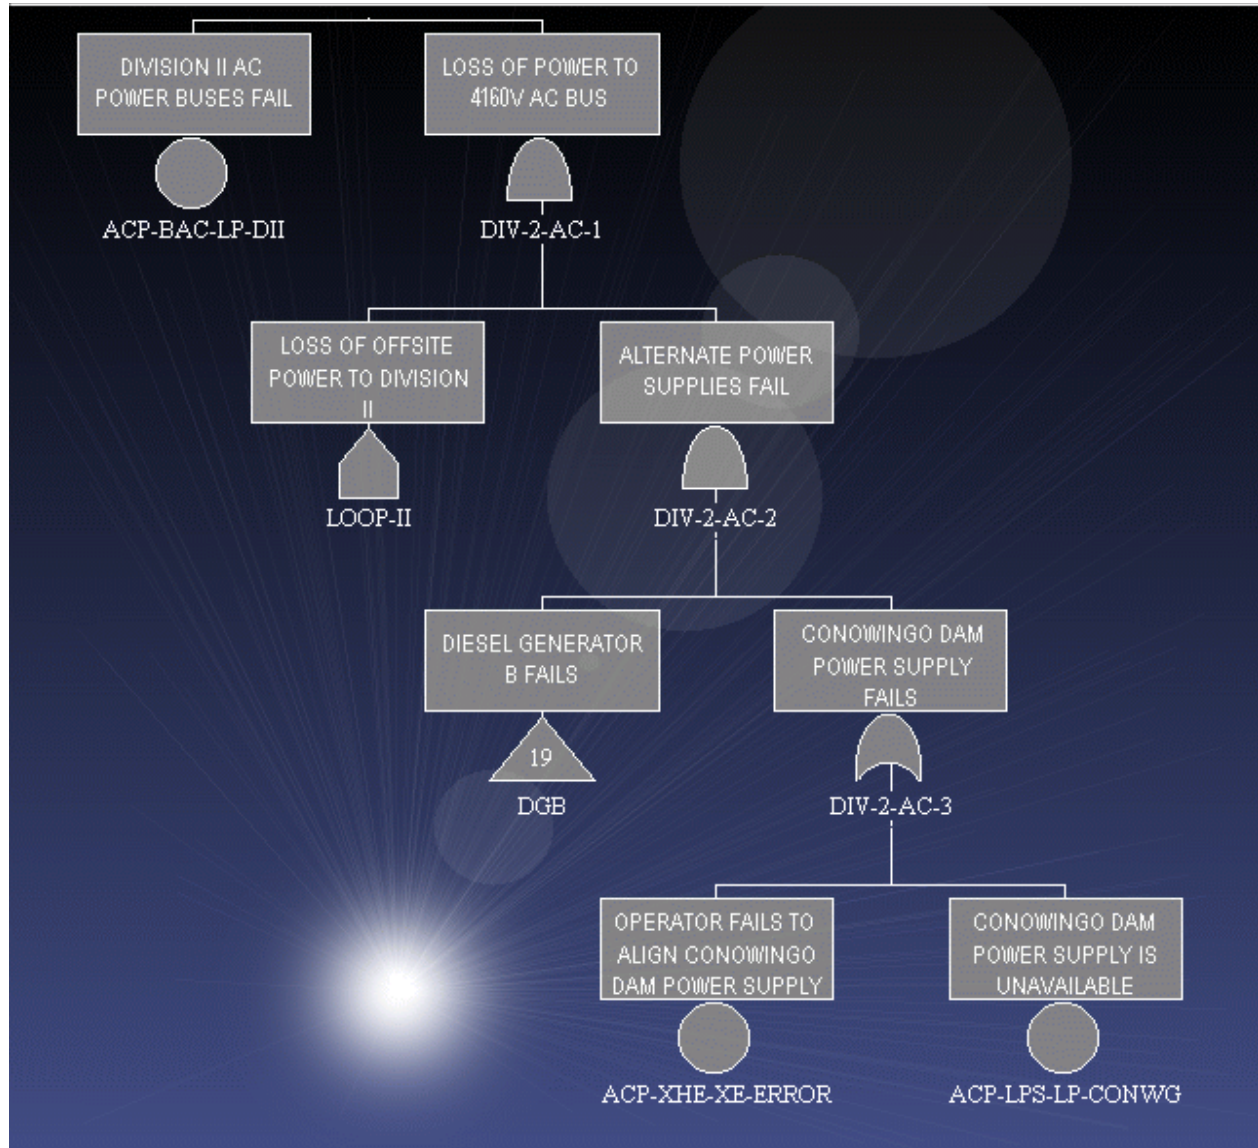


Figure 1. Peach Bottom SPAR division II AC power fault tree

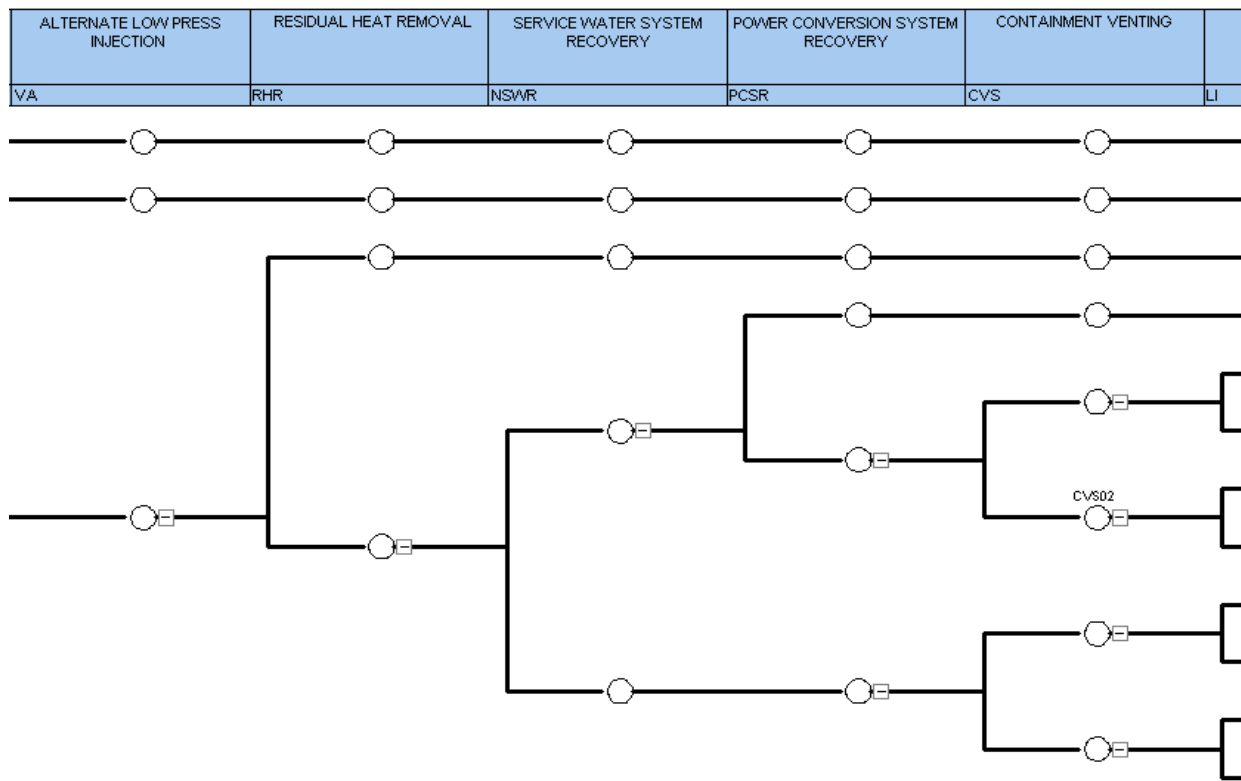


Figure 2. Event tree modeling of recovery event (NSWR)

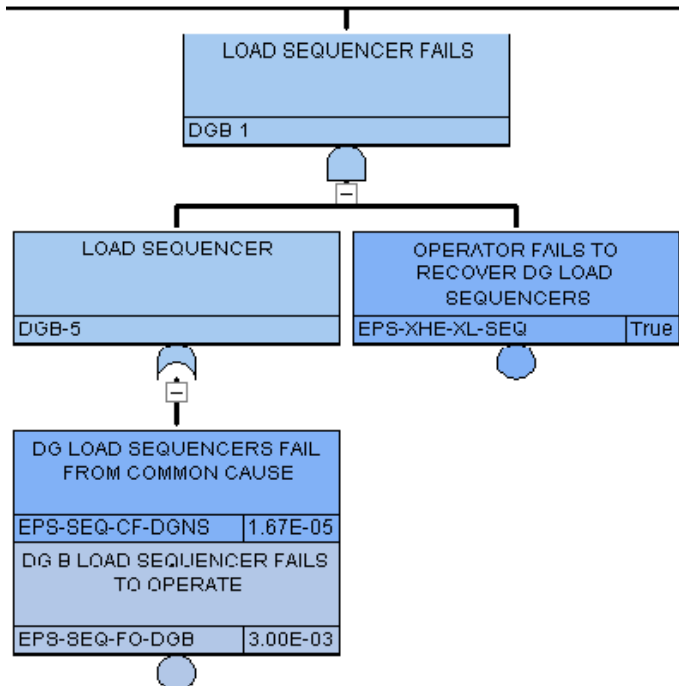


Figure 3. Fault tree modeling of recovery event (EPS-XHE-XL-SEQ)

```

| Dependent recovery actions
|
zRCI-NOREC = RCI-XHE-XL-START + RCI-XHE-XL-RUN + RCI-XHE-XL-RSTRT + RCI-XHE-XL-XFER;

if zRCI-NOREC * HCI-XHE-XL-START then
  DeleteEvent = HCI-XHE-XL-START;
  AddEvent = HCI-XHE-XL-START1;
elseif zRCI-NOREC * HCI-XHE-XL-RUN then
  DeleteEvent = HCI-XHE-XL-RUN;
  AddEvent = HCI-XHE-XL-RUN1;
endif

```

Figure 4. Post-processing modeling of recovery events

LOOP-Dependent Nonrecovery Probabilities

- This section will address a number of basic events in the SPAR models that are calculated conditional on LOOP category and duration. Such events are those related to long term AC power recovery (i.e., diesel generators) and reactor coolant pump seal LOCA (for PWR models).
- Offsite power recovery curves and equations are discussed above.
- The diesel nonrecovery model is represented by $P(G > t_{\text{short}})$. Previous to the SPAR Rev. 8.15+ models, the aleatory model for EDG recovery was an exponential distribution. The current SPAR models, and corresponding SAPHIRE calculation, model the recovery time as Weibull-distributed. As was the case for the LOOP nonrecovery calculation, the PLUG_4GROUPLLOOP.DLL add-in can also estimate emergency diesel generator (EDG) nonrecovery probability. This add-in to SAPHIRE is invoked by selecting the procedure type "DG_RECOVERY" and providing SAPHIRE with the appropriate recovery time and the Weibull α and β parameters.
- The Weibull-based form of f_{DG} (the EDG recovery time density) is:

$$f_{DG}(t) = \frac{\alpha}{\beta^\alpha} t^{\alpha-1} \exp\left[-\left(\frac{t}{\beta}\right)^\alpha\right]$$

$$F_{DG}(t) = 1 - \exp\left[-\left(\frac{t}{\beta}\right)^\alpha\right]$$

- For recovery of one of two (or more) failed EDGs, a value of 0.69 for α and 17.6 hours for β is recommended. This implies a mean time to repair an EDG of 22.6 hours. This equation and associated parameter values are built into the DG_RECOVERY plug-in used by SAPHIRE.

Probability of exceedance for emergency diesel generator repair times.

Duration (hours)	Probability of Exceedance (EDG Repair Times)a	Duration (hours)	Probability of Exceedance (EDG Repair Times)a
0.5	0.918	14.0	0.426
1.0	0.871	15.0	0.409
1.5	0.833	16.0	0.393
2.0	0.801	17.0	0.377
3.0	0.745	18.0	0.363
4.0	0.698	19.0	0.349
5.0	0.658	20.0	0.336
6.0	0.622	21.0	0.324
7.0	0.590	22.0	0.312
8.0	0.560	23.0	0.301
9.0	0.534	24.0	0.290
10.0	0.509	a. Repair of one or more EDGs (choosing the one requiring the least time to repair). Modeled as a Weibull distribution with $\alpha = 0.69$ and $\beta = 17.6$ (NRC 2012).	
11.0	0.486		
12.0	0.465		
13.0	0.445		

Mean time to repair a DG using the information above (in Excel):

[MTTF (MTTR) = $\beta \Gamma(1+1/\alpha) = 17.6\Gamma(1+1/.69) = 17.6*\text{EXP}(\text{GAMMALN}(1 + 1/.69)) = 22.6$ hours]

7.4 *Workshop*

8. INITIATOR-TYPE EVENTS using ECA

Section 8 contains a description of how the Events and Conditions Assessment (ECA) in SAPHIRE is used to evaluate events that can be considered as initiating events. Details on how to operate the ECA workspace for a hypothetical event evaluation are provided.

Learning Objectives

- Demonstrate proficiency with ECA workspace by performing the workshop exercises related to an initiator type of event evaluation.

Section 8 Topics

- 8.1 Introduction
- 8.2 Plant Overview
- 8.3 Event Description
- 8.4 Preliminary steps for Initiating Event Assessment
- 8.5 ECA Workspace Walk-Through
- 8.6 Workshop

8.1 Introduction

- This section demonstrates how to use ECA workspace to evaluate events that involve initiators.
 - ◇ As an example of initiating event assessment, we will walk through the evaluation of a loss of offsite power event using the Generic PWR SPAR model.
- Topics to be covered include:
 - ◇ A brief overview of the plant,
 - ◇ A discussion of the event to be modeled,
 - ◇ A discussion of the preliminary steps to an analysis of the event,
 - ◇ A walk through of the use of ECA workspace to evaluate the event,
 - ◇ A workshop that models some similar events.
- The basic approach demonstrated in this section will be to estimate the conditional core damage probability (CCDP) as a result of the LOOP event.
- ECA workspace has a built-in procedure that will handle most of the details for the analysis.
 - ◇ The analysts' job will be to:
 - Determine what basic events in the SPAR model must be modified to map the event into the model.
 - Enter the appropriate changes through the ECA workspace Initiating Event Analysis interface.

8.2 Plant Overview

- The Generic PWR SPAR model is a four loop plant that utilizes feed-and-bleed capability as an alternative to auxiliary feedwater and main feedwater to remove decay heat from the primary.
 - ◇ For this analysis, we will use this SPAR model.
 - ◇ The model includes the front-line injection and decay heat removal systems.

- A summary of the injection and decay heat removal systems includes:
 - ◊ Auxiliary Feedwater System (AFW). AFW has three pump trains. Generally one of three trains is required to feed two of four steam generators.
 - ◊ Emergency Power System (EPS). EPS has two dedicated diesel generators and a backup diesel generator that can be connected to either ac electrical bus.
 - ◊ High Pressure Injection (HPI)/High Pressure Recirculation (HPR). HPI two different sub-systems, safety injection and charging, that are used to inject water from a large tank into the reactor vessel. The success is one of two SI pumps or one of two charging pumps.
 - ◊ Low Pressure Injection System. LPI has two pump trains, one of which is required to provide injection. (LPI pumps perform multiple operations, recirculation, injection, and residual heat removal.)

8.3 Event Description

A fire near the plant caused the offsite transmission lines to fault. The emergency diesels started and operated as designed. Although offsite power was restored in 5 minutes, emergency electrical buses were supplied by the diesels for 24 hours.

Two days after the LOOP occurred, the LPI A pump recirculation line was found to be obstructed with plastic sheeting material. The material was determined to have been in the recirculation line since the last refueling outage 30 days before the LOOP.

- We will consider this event to be a grid-related loss-of-offsite power initiating event.
- We will consider the failure of the LPI pump recirculation line to be a potential common cause failure (the B pump was not affected, although it might have been).

8.4 Preliminary Steps for Initiating Event Assessment

Before starting a new ECA workspace we need to review the model documentation and identify the basic events that must be modified to map the event into the model. We might also need to recalculate some basic event probabilities if we determine that our analysis will require event mappings that are not automatically handled by the ECA workspace.

- The ECA workspace shows the model is preconfigured for grid-related loss-of-offsite power events. We will accept the non-recovery and seal LOCA probabilities provided.
- We will need to account for the failed LPI pump separately. For this example, we will assume that the obstruction would not allow the pump to start. We review the model and find several LPI pump events:

LPI-MDP-CF-RUN	LPI PUMPS FAIL FROM COMMON CAUSE TO RUN
LPI-MDP-CF-START	LPI PUMPS FAIL FROM COMMON CAUSE TO START
LPI-MDP-FR-1A	LPI PUMP 1A FAILS TO RUN
LPI-MDP-FR-1B	LPI PUMP 1B FAILS TO RUN
LPI-MDP-FS-1A	LPI PUMP 1A FAILS TO START
LPI-MDP-FS-1B	LPI PUMP 1B FAILS TO START
LPI-MDP-TM-1A	LPI PUMP TRAIN 1A IS IN TEST OR MAINTENANCE
LPI-MDP-TM-1B	LPI PUMP TRAIN 1B IS IN TEST OR MAINTENANCE

- The failure mode we are looking for is FS
- We can model the recirculation line failure by setting basic event

LPI-MDP-FS-1A to TRUE

- We will also need to account for the possibility that the remaining LPI pump might have been affected by a common cause failure involving both pumps. Recall (from Section 6.4) that guidance for this potential common cause failure indicates that we need to set to the basic event for the observed failure mode (failure to start, LPI-MDP-FS-1A) to TRUE, and set the basic event representing CCF for the unobserved failure mode (failure to run, LPI-MDP-CF-RUN) to FALSE.
- We can now start the ECA workspace and enter our data. The following checklist will help to assist during the calculation.

Event Analysis Checklist


#	Item	Result
1	Is the event an initiating event or condition assessment?	Initiating <input type="checkbox"/> Condition <input type="checkbox"/> Both <input type="checkbox"/>
2	If the event is a condition assessment, what is the duration?	hours
3	If the event is an initiating event, is the initiator recoverable? (Note that SAPHIRE (ECA) will adjust the non-recovery probabilities for you automatically)	Yes <input type="checkbox"/> No <input type="checkbox"/>
4	Were any systems, structures, or components (SSCs) inoperable during the event?	Yes <input type="checkbox"/> No <input type="checkbox"/>
5	If the answer to Question 4 was yes, identify the SSCs by finding its associated basic event(s) from the PRA model. Only identify "independent failure" related events (e.g., no common-cause yet).	
6	For those basic events identified in Question 5, determine the SSC's non-recovery probability (if it is recoverable from the failure).	
7	Are there any basic events identified in Question 5 that have associated common-cause failure events?	Yes <input type="checkbox"/> No <input type="checkbox"/>
8	For each event that had a yes answer to Question 7, determine the type of SSC failure. Options are: (a) Independent failures (b) Common-cause failures (actual or potential) (c) Testing/Maintenance <i>Refer to Section 6 for additional information.</i>	

#	Item	Result
9	List the common-cause basic events that were identified in Question 7. Note that since you are using the Rev. 8.15+ SPAR model, you <i>will not</i> (normally) need to adjust these events (they are automatically modified by the software).	
10	You will need to specify in the ECA workspace how to modify each basic event identified in Question 8. From Question 8, if the SSC is an independent failure or testing/maintenance outage, set the event to a probability of 1.0. Otherwise, set it to TRUE.	
11	For those SSCs that were identified in Question 6 and do not have an associated common-cause event, set the SSCs to its non-recovery probability in the ECA workspace.	
12	Process the analysis using the modifications identified in Questions 1 - 11. Record your results of the analysis.	

8.5 ECA Workspace Walk-Through


This section will provide a step-by-step guide to performing an event evaluation for the initiating event described in the preceding section.

- Start the ECA workspace by double-clicking the **New ECA...** option in the Workspaces list panel.

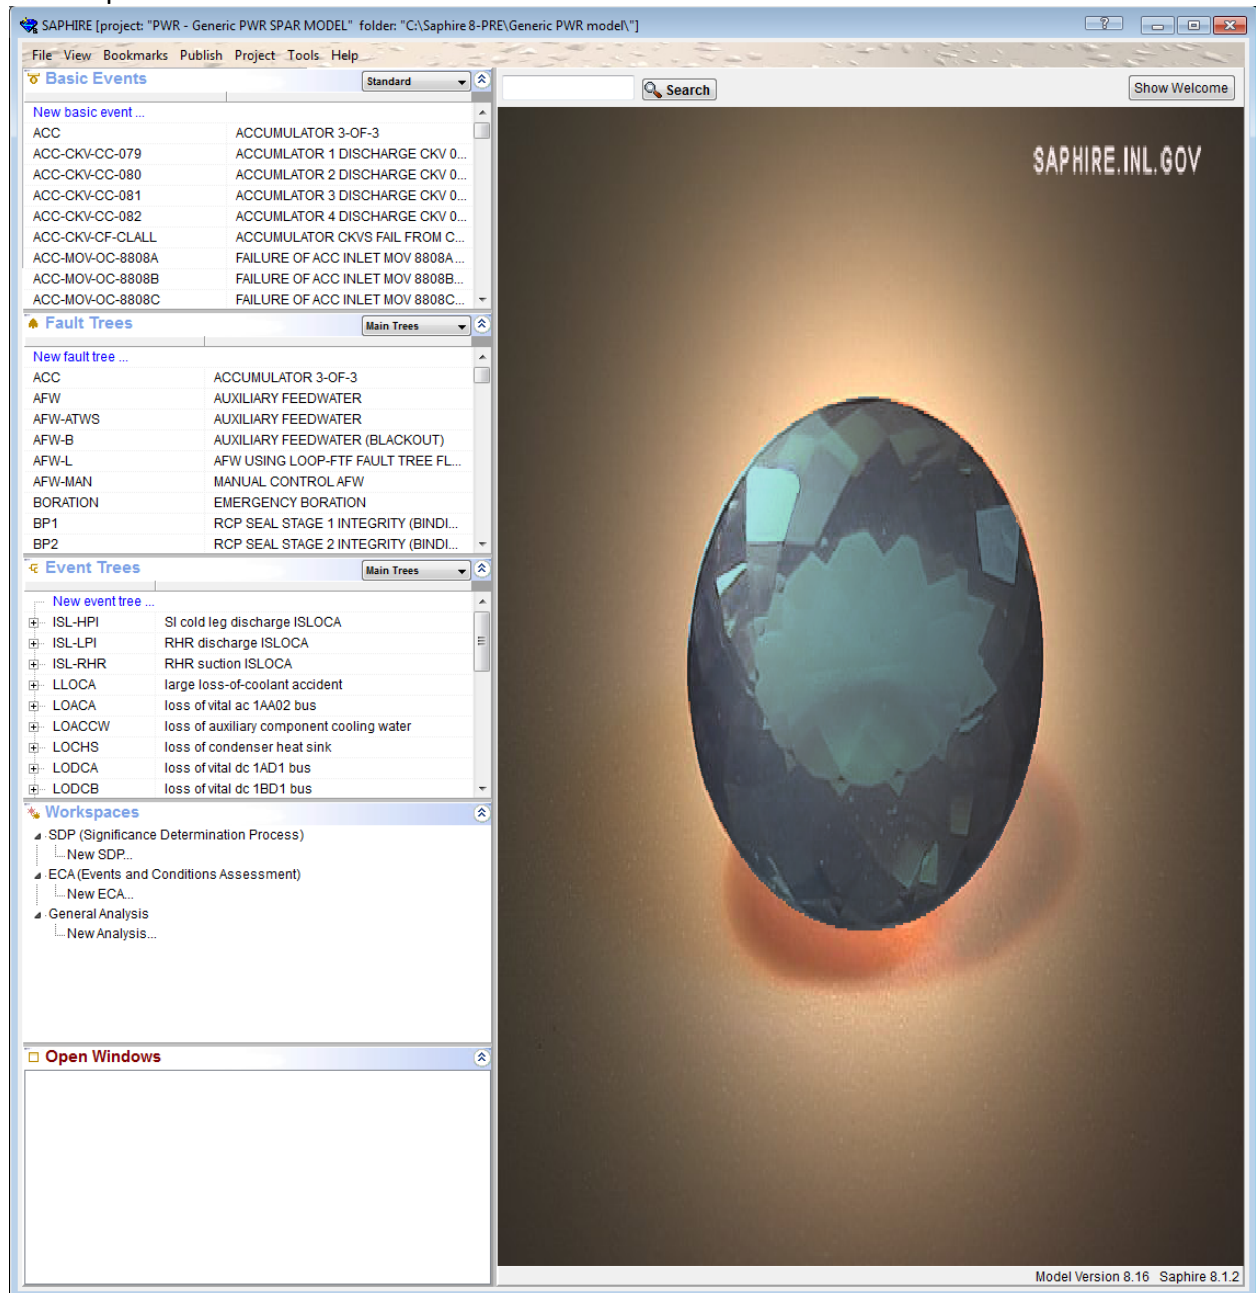


This example uses the Generic PWR SPAR model. Make sure this project is opened (i.e., currently working project).

- From the main screen, select the **Initiating Event** radio button.




- The steps we are going to go through are:
 1. Select the initiating event that did occur
 2. Add any required event modifications
 3. Process the analysis
 4. Review the results
- The ECA workshop will display the Initiating Events screen. From the list of initiating events, select the one that matches the assessment, by **clicking** the radio button next to the initiating event.

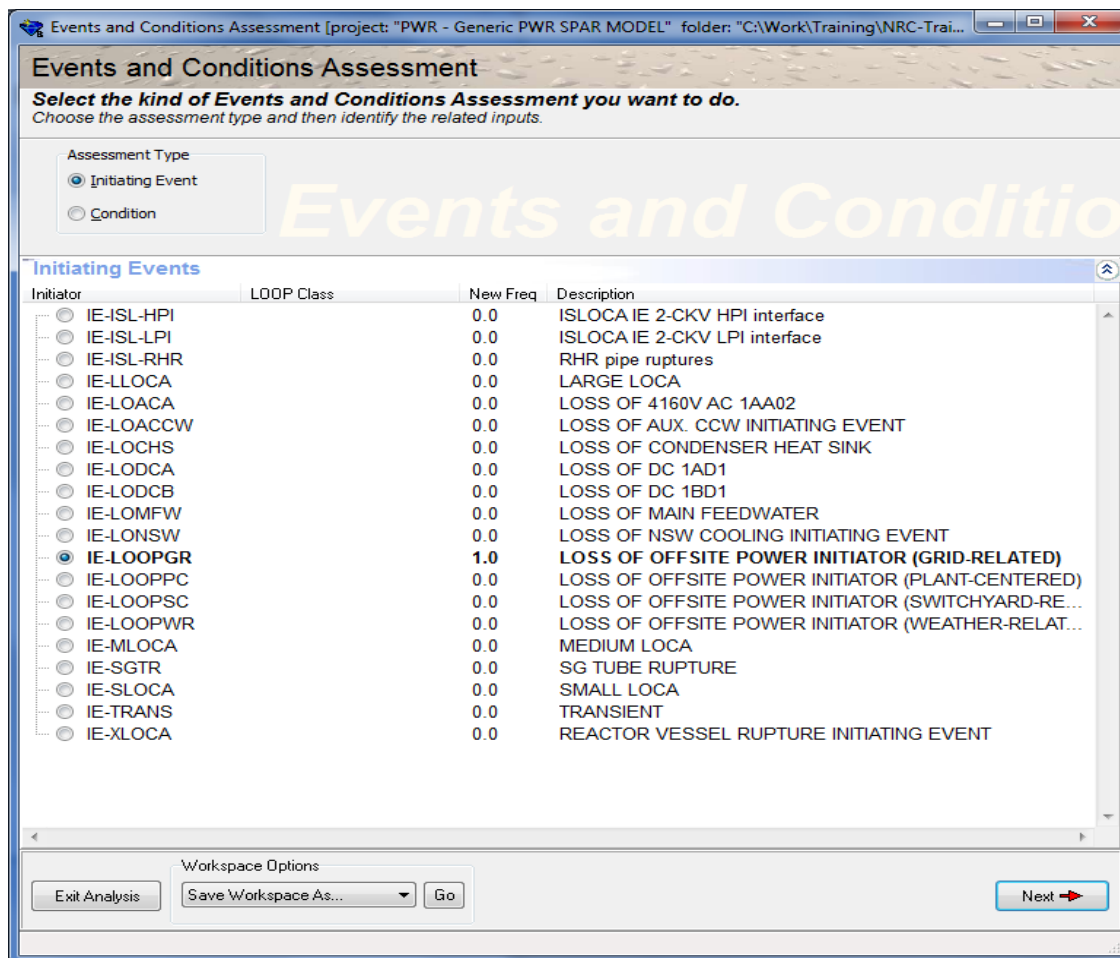

- This example is a GRID RELATED LOOP, once the radio button is selected, then click the **Next** button.

- The “Identify affected items” screen allows the analyst to add to or modify the basic event probabilities (if needed) that will be saved with the analysis record.

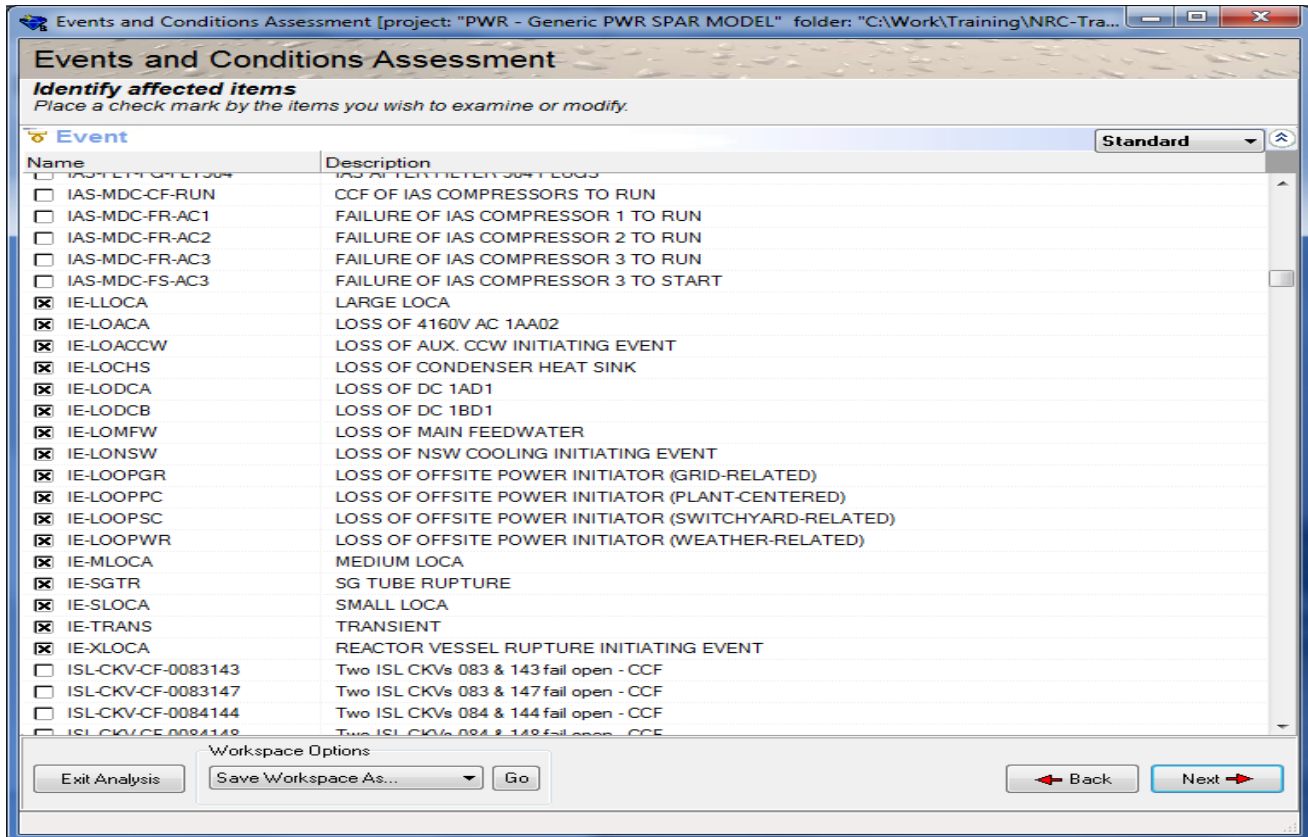

Initially, the initiating events will selected as being modified from their nominal values by being checked. For example, the non-LOOP initiators will be set to zero since these initiators did not occur.


We need to add other events to the list, specifically the events related to the RHR pump.

- Since we need to add additional basic events, scroll down the list and click the check box for the basic event LPI-MDP-FS-1A and LPI-MDP-CF-RUN.


<input checked="" type="checkbox"/>	LPI-MDP-CF-RUN	LPI PUMPS FAIL FROM COMMON CAUSE TO RUN		
	Edit	Edit	False	1.043E-5
<input checked="" type="checkbox"/>	LPI-MDP-FS-1A	LPI PUMP 1A FAILS TO START		
	Edit	Edit	True	1.500E-3

- Select the **Edit** Option to make the correct adjustments

- Set **LPI-MDP-FS-1A** to TRUE.

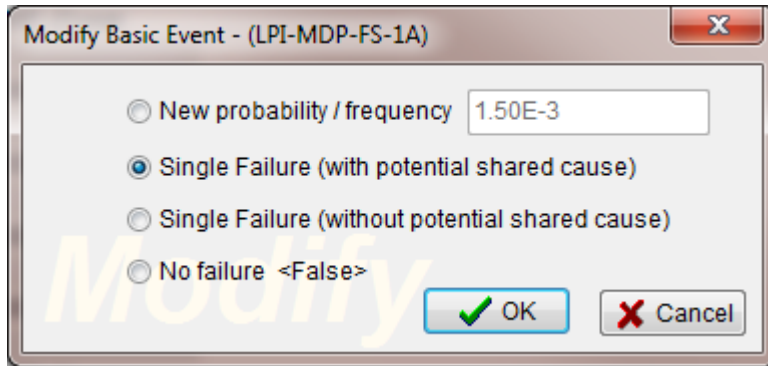

- Find **LPI-MDP-CF-RUN** and set it to FALSE.

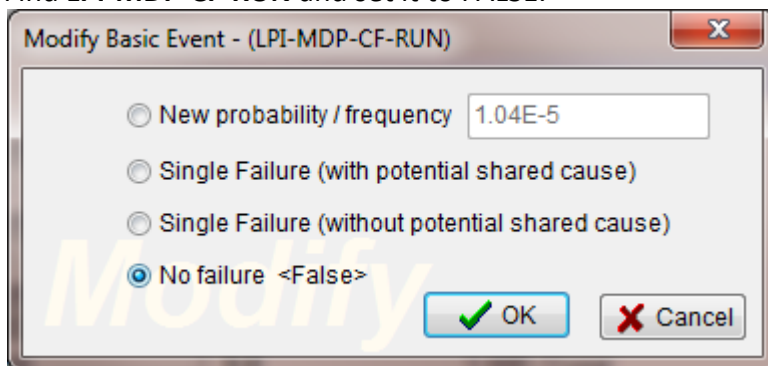

- Select the **Next** button and then set the basic events probabilities.
- Once the two basic events have been adjusted select the **Next** button.

The following evaluation screen will appear. Each section will be discussed.

Events and Conditions Assessment [project: "PWR - Generic PWR SPAR MODEL" folder: "C:\Work\Training\NRC-Training\P-..."]

Events and Conditions Assessment

Select solve options Choose your solve settings and fill in any notes to be included in the resulting report.

Method Of Solving

☐ Single pass solution

☒ Multiple pass solution (with cut set update)

Other analysis settings

☐ Turn off all normal test and maintenance events [P (T/M) = 0].

Cut Set Truncation Normal 1.00E-11

Size Truncation None

Threads to use on solve 1

Uncertainty Method

☐ None ☒ Monte Carlo ☐ Latin Hypercube

Uncertainty Parameters

Sample Size 5000 Seed 12345

Intermediate Values Report None

Model Types

<input type="checkbox"/> EXT-FLOOD	FULL POWER - EXTERNAL FLOOD E...
<input type="checkbox"/> EXT-OTHER	FULL POWER - OTHER EXTERNAL E...
<input type="checkbox"/> EXT-TORN	FULL POWER - TORNADO EVENTS
<input type="checkbox"/> EXT-WIND	FULL POWER - EXTERNAL HIGH WI...
<input type="checkbox"/> INT-FIRE	FULL POWER - INTERNAL FIRE EVE...
<input type="checkbox"/> INT-FLOOD	FULL POWER - INTERNAL FLOOD EV...
<input type="checkbox"/> INTERNAL	FULL POWER - INTERNAL EVENTS

Report Options

99% Report

Short analysis description/title

Untitled

Analysis notes or information

B I U **Small Large**

Fill in assessment notes here

Exit Analysis

Workspace Options

Save Workspace As... **Go**

Report Format

☒ HTML ☐ CVS

☐ PDF ☐ XLS

☐ RTF

Back Finish

Method of Solving

Method Of Solving

☐ Single pass solution

☒ Multiple pass solution (with cut set update)

Other analysis settings

☐ Turn off all normal test and maintenance events [P (T/M) = 0].

The difference between the single pass with cut set update and the multi-pass routines are:

- The multiple pass solution algorithm will ensure that all sequence post-processing rules are applied even when basic events in the model are specified as a logical "True." The "single pass with cut set update option" does not.
- The multiple pass algorithm will remove non-minimal cut sets (if generated from a post-processing rule) by automatically performing a cut set update.
- SAPHIRE 8 performs the "nominal case" and the "new case" solving at the same truncation level for both algorithms.
- The "Turn off all normal test and maintenance events" will set all test and maintenance events to 0.0 and then resolve the model, prior to evaluation.

Cut Set Truncation

Cut Set Truncation		Size Truncation	
Normal	1.00E-11	None	
Threads to use on solve		1	
Uncertainty Method			
<input type="radio"/> None <input checked="" type="radio"/> Monte Carlo <input type="radio"/> Latin Hypercube			
Uncertainty Parameters			
Sample Size	5000	Seed	12345
Intermediate Values Report	None		


- The nominal truncation will solve all sequences at this truncation (it defaults to the model's default).
- Uncertainty will be evaluated when solving the model (see NUREG/CR-7039, Volume 5, Section 2.7).

Description


Short analysis description/title	
Untitled	
Analysis notes or information	B <i>I</i> <u>U</u> ¶ <small>Small</small> Large
Fill in assessment notes here	
<div> <div>Exit Analysis</div> <div> Workspace Options Save Workspace As... </div> <div>Go</div> </div> <div> Report Format <input checked="" type="radio"/> HTML <input type="radio"/> CVS <input type="radio"/> PDF <input type="radio"/> XLS <input type="radio"/> RTF </div> <div> <div>Back</div> <div>Finish</div> </div>	

A title can be specified to identify the type of assessment being performed. Also, a description of the event and the components that were affected can be described in the analysis notes block.

- Note that changing the truncation may affect the CCDP similar to that shown below.

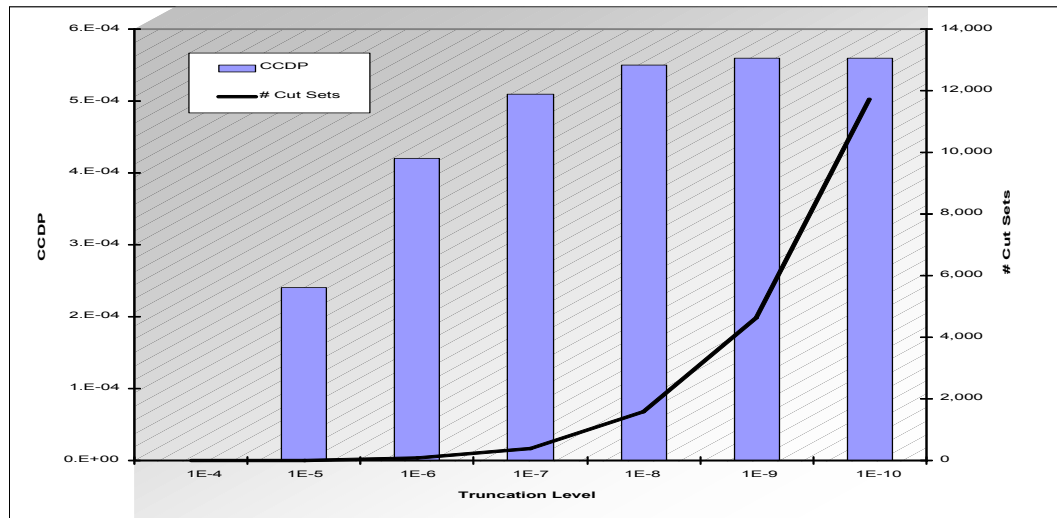

- Once all of the information has been selected, click the Finish button and SAPHIRE will process the analysis. The following screen just cautions the analyst that the evaluation may take extra time depending upon the complexity of the model.

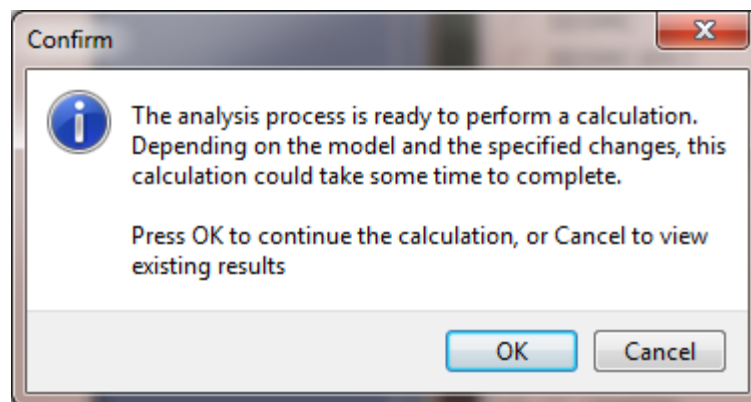

- When finished, SAPHIRE will display the Event Assessment screen. The **CCDP** for the event will also be displayed.
- Once the evaluation is complete SAPHIRE will provide a summary report of the evaluation. Each of the pieces of the output will be discussed.

The first part is the overall result.

Initiating Event Assessment Summary

Initiating Event	IE-LOOPGR
CCDP	6.374E-5

Solve Settings

Solve Settings

Cut Set Truncation	Normal 1.00E-11
Size Truncation	None
Solve Method	Multiple Pass

Summary of Events Changed

Grid Related LOOP**Summary of Conditional Event Changes**

Event	Description	Cond Type	Cond Value	Nominal Type	Nominal Value
IE-ISL-HPI	ISLOCA IE 2-CKV HPI interface	N	0.000E+0	S	3.268E-6
IE-ISL-LPI	ISLOCA IE 2-CKV LPI interface	N	0.000E+0	S	3.268E-6
IE-ISL-RHR	RHR pipe ruptures	N	0.000E+0	S	5.622E-6
IE-LLOCA	LARGE LOCA	N	0.000E+0	N	2.500E-6
IE-LOACA	LOSS OF 4160V AC 1AA02	N	0.000E+0	N	9.000E-3
IE-LOCCW	LOSS OF CCW INITIATING EVENT	N	0.000E+0	N	4.000E-4
IE-LOCHS	LOSS OF CONDENSER HEAT SINK	N	0.000E+0	N	8.000E-2
IE-LODCA	LOSS OF DC 1AD1	N	0.000E+0	N	6.000E-4
IE-LODCB	LOSS OF DC 1BD1	N	0.000E+0	N	6.000E-4
IE-LOMFW	LOSS OF MAIN FEEDWATER	N	0.000E+0	N	1.000E-1
IE-LONSW	LOSS OF NSW COOLING INITIATING EVENT	N	0.000E+0	N	4.000E-4
IE-LOOPGR	LOSS OF OFFSITE POWER INITIATOR (GRID-RELATED)	1	1.000E+0	N	1.860E-2
IE-LOOPPC	LOSS OF OFFSITE POWER INITIATOR (PLANT-CENTERED)	N	0.000E+0	N	2.070E-3
IE-LOOPSC	LOSS OF OFFSITE POWER INITIATOR (SWITCHYARD-RELATED)	N	0.000E+0	N	1.040E-2
IE-LOOPWR	LOSS OF OFFSITE POWER INITIATOR (WEATHER-RELATED)	N	0.000E+0	N	4.830E-3
IE-MLOCA	MEDIUM LOCA	N	0.000E+0	N	2.000E-4
IE-SGTR	SG TUBE RUPTURE	N	0.000E+0	N	4.000E-3
IE-SLOCA	SMALL LOCA	N	0.000E+0	N	6.000E-4
IE-TRANS	TRANSIENT	N	0.000E+0	N	8.000E-1
IE-XLOCA	REACTOR VESSEL RUPTURE INITIATING EVENT	N	0.000E+0	N	1.000E-7
LPI-MDP-CF-RUN	LPI PUMPS FAIL FROM COMMON CAUSE TO RUN	F	False	C	1.043E-5
LPI-MDP-FS-1A	LPI PUMP 1A FAILS TO START	T	True	1	1.500E-3
LPI-MDP-CF-START	LPI PUMPS FAIL FROM COMMON CAUSE TO START	C	4.180E-2	C	6.270E-5


Implied Event Changes as per RASP Guidance

Event	Description	Cond Type	Cond Value	Nominal Type	Nominal Value
LPI-MDP-FR-1A	LPI PUMP 1A FAILS TO RUN	1	1.000E+0	C	5.379E-4
LPI-MDP-TM-1A	LPI PUMP TRAIN 1A IS IN TEST OR MAINTENANCE	T	True	I	0.000E+0
LPI-MDP-CF-RUN	LPI PUMPS FAIL FROM COMMON CAUSE TO RUN	F	False	C	1.043E-5

CCDP Uncertainty Analysis (if performed)

CCDP Uncertainty Distribution

5%	Median	Point Estimate	Mean	95%	Seed	Sample Size	Method
1.762E-7	1.970E-5	6.375E-5	6.432E-5	2.610E-4	12345	5000	Monte Carlo

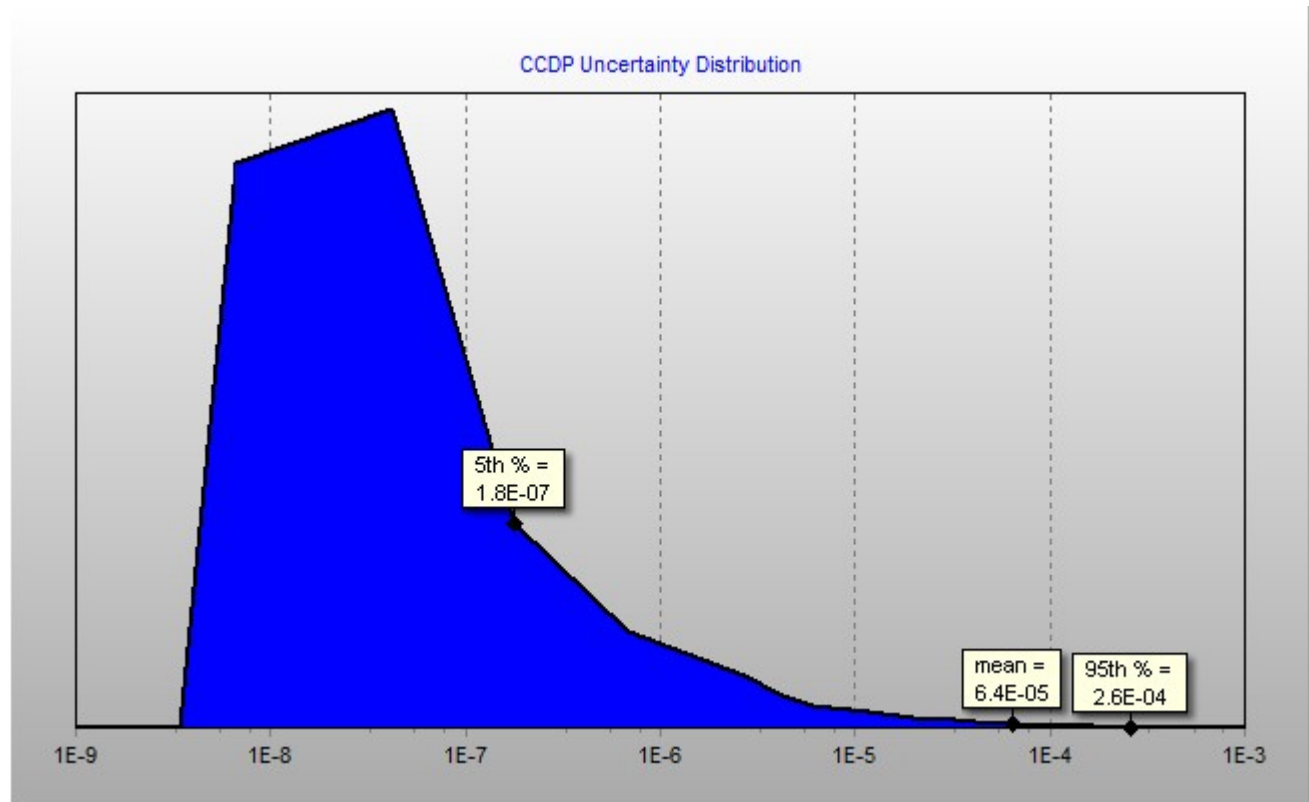

Results from the evaluation listing the dominant event tree and dominant sequences.

Event Tree Dominant Results

Only items contributing at least 1.0% to the total CCDP are displayed.

Event Tree	CCDP	% Contribution	Description
LOOPGR	6.374E-5	100.0%	loss of offsite power (Grid related)
Total	6.374E-5	100%	

Dominant Sequence Results

Only items contributing at least 1.0% to the total CCDP are displayed.

Event Tree	Sequence	CCDP	% Contribution	Flagset	Description
LOOPGR	15	1.345E-5	21.1%	ETF-LOOP-GR	/RPS-L, /EPS, AFW-L, FAB-L
LOOPGR	16-04-2	1.174E-5	18.4%	ETF-SBO-GR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, BP2, /OPR-04H, /HPI, /SSC, LPR
LOOPGR	16-03-10	8.428E-6	13.2%	ETF-SBO-GR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, /BP2, OPR-04H, DGR-04H, AFW-MAN, SG-DEP-LT1
LOOPGR	16-06	7.023E-6	11.0%	ETF-SBO-GR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, BP2, OPR-04H, DGR-04H
LOOPGR	02-05	6.147E-6	9.6%	ETF-LOOP-GR	/RPS-L, /EPS, /AFW-L, /PORV-L, LOISC-L, /RSD-L, /BP1, BP2, OPR-02H, HPI-L
LOOPGR	02-02-03	4.899E-6	7.7%	ETF-LOOPGR-SLOCA	/RPS-L, /EPS, /AFW-L, /PORV-L, LOISC-L, /RSD-L, /BP1, BP2, /OPR-02H, /RPS, /AFW, /HPI, /SSC, RHR, LPR
LOOPGR	16-45	2.950E-6	4.6%	ETF-SBO-GR	/RPS-L, EPS, AFW-B, OPR-01H, DGR-01H
LOOPGR	02-02-09	2.849E-6	4.5%	ETF-LOOPGR-SLOCA	/RPS-L, /EPS, /AFW-L, /PORV-L, LOISC-L, /RSD-L, /BP1, BP2, /OPR-02H, /RPS, /AFW, HPI, /SSC1, LPI
LOOPGR	16-10-2	2.062E-6	3.2%	ETF-LOOPGR-MLOCA	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, BP1, BP2, /OPR-02H, /HPI, /SSC, LPR
Total		6.374E-5	100%		

Referenced Fault Trees

Fault Tree	Description
AFW-B	AUXILIARY FEEDWATER (BLACKOUT)
AFW-L	AFW USING LOOP-FTF FAULT TREE FLAGS FAULT TREE
AFW-MAN	MANUAL CONTROL AFW
BP1	RCP SEAL STAGE 1 INTEGRITY (BINDING/POPPING)
BP2	RCP SEAL STAGE 2 INTEGRITY (BINDING/POPPING)
DGR-01H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 1 HOUR
DGR-04H	DIESEL GENERATOR RECOVERY (IN 4 HR)
EPS	EMERGENCY POWER
FAB-L	FEED AND BLEED IS UNAVAILABLE using LOOP-FTF
HPI	HIGH PRESSURE INJECTION
HPI-L	HIGH PRESSURE INJECTION
LOISC-L	RCPSL USING LOOP-FTF FAULT TREE FLAGS
LPI	LOW PRESSURE INJECTION
LPR	LOW PRESSURE RECIRC
OPR-01H	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR
OPR-02H	OFFSITE POWER RECOVERY IN 2 HRS
OPR-04H	OFFSITE POWER RECOVERY (IN 4 HR)
RHR	RESIDUAL HEAT REMOVAL
SG-DEP-LT1	DEPRESSURIZE SGs (DEPENDENT)

A report of the top 1% dominant cut sets for each sequence is provided.

Cut Set Report - LOOPGR 15

#	Case	Prob/Freq	Total %	Cut Set
		1.345E-5	100	Displaying 6588 of 6588 Cut Sets.
1	C	1.962E-6	14.58	IE-LOOPGR,AFW-MDP-TM-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FR-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
2	C	1.200E-6	8.92	IE-LOOPGR,AFW-MDP-TM-4002,AFW-XHE-XM-TDPBD3,EPS-SEQ-FC-DGA
3	C	7.357E-7	5.47	IE-LOOPGR,AFW-MDP-FS-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FR-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
4	C	4.905E-7	3.65	IE-LOOPGR,AFW-MOV-OO-FV5154,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FR-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
5	C	4.632E-7	3.44	IE-LOOPGR,AFW-MDP-TM-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FS-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
6	C	4.500E-7	3.35	IE-LOOPGR,AFW-MDP-FS-4002,AFW-XHE-XM-TDPBD3,EPS-SEQ-FC-DGA
7	C	4.169E-7	3.1	IE-LOOPGR,AFW-MDP-FS-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-TM-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
8	C	3.000E-7	2.23	IE-LOOPGR,AFW-MOV-OO-FV5154,AFW-XHE-XM-TDPBD3,EPS-SEQ-FC-DGA
9	C	2.779E-7	2.07	IE-LOOPGR,AFW-MOV-OO-FV5154,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-TM-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
10	C	2.638E-7	1.96	IE-LOOPGR,AFW-MDP-FR-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FR-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
11	C	2.316E-7	1.72	IE-LOOPGR,ACP-CRB-CC-AA20,AFW-MDP-TM-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
12	C	2.316E-7	1.72	IE-LOOPGR,AFW-MDP-TM-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-CRB-OO-1A1,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
13	C	2.260E-7	1.68	IE-LOOPGR,AFW-XHE-XM-MANAFW,ESF-VCF-CF-TRNAB,HPI-XHE-XM-FAB1
14	C	1.737E-7	1.29	IE-LOOPGR,AFW-MDP-FS-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-FS-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
15	C	1.614E-7	1.2	IE-LOOPGR,AFW-MDP-FR-4002,AFW-XHE-XM-TDPBD3,EPS-SEQ-FC-DGA
16	C	1.495E-7	1.11	IE-LOOPGR,AFW-MDP-FR-4002,AFW-XHE-XM-TDPBD3,EPS-ACP-SWYD,EPS-DGN-TM-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
17	C	1.373E-7	1.02	IE-LOOPGR,AFW-MDP-TM-4003,AFW-TDP-FS-4001,EPS-ACP-SWYD,EPS-DGN-FR-DGB,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2
18	C	1.373E-7	1.02	IE-LOOPGR,AFW-MDP-TM-4002,AFW-TDP-FS-4001,EPS-ACP-SWYD,EPS-DGN-FR-DGA,EPS-DUAL-UNITLOOP,EPS-XHE-XM-DGUN2

The remaining dominant sequence cut sets are also listed.

Referenced Events- lists all of the basic events that part of the cut sets generated from the analysis.

Referenced Events

Event	Description	Probability
ACP-CRB-CC-AA20	FAILURE OF SWITCHYARD AC BREAKER AA20 TO OPEN	2.500E-3
ACP-CRB-CC-BA30	FAILURE OF SWITCHYARD AC BREAKER BA30 TO OPEN	2.500E-3
ACP-CRB-CF-A2030	CCF OF SWITCHYARD AC BREAKERS TO OPEN AA0205/0301	4.250E-5
AFW-MDP-FR-4002	AFW MOTOR-DRIVEN PUMP P4-4002 FAILS TO RUN	5.379E-4
AFW-MDP-FS-4002	AFW MOTOR-DRIVEN PUMP P4-4002 FAILS TO START	1.500E-3
AFW-MDP-TM-4002	AFW MDP P4-4002 UNAVAILABLE DUE TO TEST AND MAINTENANCE	4.000E-3
AFW-MDP-TM-4003	AFW MDPP4-4003 UNAVAILABLE DUE TO TEST AND MAINTENANCE	4.000E-3
AFW-MOV-CC-HV5106	STEAM SUPPLY MOV HV5106 FAILS TO OPEN	1.000E-3
AFW-MOV-OO-FV5154	FAILURE OF AFW MDP B MINFLOW MOV 5154 TO CLOSE	1.000E-3
AFW-TDP-FR-4001	TURBINE DRIVEN FEED PUMP P4-001 FAILS TO RUN	4.102E-3

Event	Description	Probability
AFW-TDP-FS-4001	TURBINE DRIVEN FEED PUMP P4-001 FAILS TO START	7.000E-3
AFW-TDP-TM-4001	AFW TDP PUMP P4-001 IS IN TEST OR MAINTENANCE	5.000E-3
AFW-XHE-XM-MANAFW	OPERATOR FAILS TO MANUALLY INITIATE AFW	4.000E-3
AFW-XHE-XM-TDPBD	OPERATOR FAILS TO CONTROL AFW TDP AFTER BATTERY DEPLETION	3.000E-1
AFW-XHE-XM-TDPBD3	OPERATOR FAILS TO CONTROL AFW TDP AFTER BATTERY DEPLETION; NON SBO	1.000E-1
EPS-ACP-SWYD	AC POWER UNAVAIL. DUE TO GRID RELATED LOOP	4.000E-1
EPS-CRB-CF-1A1B	CCF OF DIESEL GENERATOR OUTPUT BREAKERS 1A1 AND 1B1 TO CLOSE	4.250E-5
EPS-CRB-OO-1A1	DIESEL GENERATOR OUTPUT BREAKER 1A1 FAILS TO CLOSE	2.500E-3
EPS-CRB-OO-1B1	DIESEL GENERATOR OUTPUT BREAKER 1B1 FAILS TO CLOSE	2.500E-3
EPS-DGN-CF-1ABRUN	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO RUN	3.282E-4
EPS-DGN-CF-1ABSTART	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO START	5.750E-5
EPS-DGN-CF-DG1ABUN2R	CCF OF UNIT 1 A&B DIESEL GENERATOR AND UNIT 2 DG TO RUN	1.214E-4
EPS-DGN-CF-DG1ABUN2S	CCF OF UNIT 1 A&B DIESEL GENERATOR AND UNIT 2 DG TO START	1.861E-5
EPS-DGN-FR-DGA	DIESEL GENERATOR A FAILS TO RUN	2.118E-2
EPS-DGN-FR-DGB	DIESEL GENERATOR B FAILS TO RUN	2.118E-2
EPS-DGN-FS-DGA	DIESEL GENERATOR A FAILS TO START	5.000E-3
EPS-DGN-FS-DGB	DIESEL GENERATOR B FAILS TO START	5.000E-3
EPS-DGN-TM-DGA	DG A UNAVAILABLE DUE TO TEST AND MAINTENANCE	1.200E-2
EPS-DGN-TM-DGB	DG B UNAVAILABLE DUE TO TEST AND MAINTENANCE	1.200E-2
EPS-DUAL-UNITLOOP	DUAL UNIT LOOP	5.790E-1
EPS-SEQ-CF-DGAB	CCF of DG1A & DG1B Sequencers To Operate	1.065E-4
EPS-SEQ-FC-DGA	DGA Sequencer Fails To Operate	3.000E-3
EPS-SEQ-FC-DGB	DGB Sequencer Fails To Operate	3.000E-3
EPS-XHE-XL-NR01H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 1 HOUR	7.857E-1
EPS-XHE-XL-NR04H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 4 HOURS	5.568E-1
EPS-XHE-XM-DGUN2	OPERATOR FAILS TO CROSS-TIE UNIT 2 DIESEL GENERATOR	1.000E+0
ESF-VCF-CF-TRNAB	CCF OF TRAIN A/B ESF ACTUATION SIGNAL	6.420E-4
HPI-XHE-XM-FAB1	OPERATOR FAILS TO INITIATE FEED AND BLEED COOLING (DEPEND)	8.800E-2
IE-LOOPGR	LOSS OF OFFSITE POWER INITIATOR (GRID-RELATED)	1.000E+0
LPI-MDP-CF-START	LPI PUMPS FAIL FROM COMMON CAUSE TO START	4.180E-2
NSW-FAN-CF-FSALL	CCF OF ALL NSW FANS TO START	3.997E-6
NSW-FAN-TM-TRNB	NSCW TRAIN B TOWER FANS Test & Maint(PSA value)	6.830E-4
NSW-MDP-CF-START	NSCW PUMPS FAIL FROM COMMON CAUSE TO START	1.396E-5
NSW-MDP-TM-TRNA	NSW TRAIN A MDPS UNAVAILABLE DUE MAINTENANCE (PSA PROB)	1.390E-3
NSW-MDP-TM-TRNB	NSW TRAIN B MDPS UNAVAILABLE DUE MAINTENANCE (PSA PROB)	1.390E-3
NSW-MOV-CC-1668A	NSW TRAIN A MOV 1668A TO CT FAILS TO OPEN	1.000E-3
NSW-MOV-CC-1669A	NSW TRAIN B MOV 1669A TO CT FAILS TO OPEN	1.000E-3
NSW-MOV-CF-16689A	NSW TRAIN A/B MOV 1668A/1669A TO CT CCF TO OPEN	2.280E-5
NSW-P1P3R-P5ST	P001, P003 RUN AND P005 STANDBY	3.330E-1
NSW-P1P5R-P3ST	P001, P005 RUN AND P003 STANDBY	3.330E-1
NSW-P2P4R-P6ST	P002, P004 RUN AND P006 STANDBY	3.330E-1
NSW-P2P6R-P4ST	P002, P006 RUN AND P004 STANDBY	3.330E-1
NSW-P3P5R-P1ST	P003, P005 RUN AND P001 STANDBY	3.330E-1
NSW-P4P6R-P2ST	P004, P006 RUN AND P002 STANDBY	3.330E-1
OEP-XHE-XL-NR01HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR (GRID-RELATED)	6.110E-1
OEP-XHE-XL-NR02HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 2 HOURS (GRID-RELATED)	3.560E-1
OEP-XHE-XL-NR04HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 4 HOURS (GRID-RELATED)	1.537E-1
OEP-XHE-XX-NR01HGR0	CONVOLUTION FACTOR FOR CCF-OPR (1HR-GR Avail)	1.750E-1
OEP-XHE-XX-NR01HGR1	CONVOLUTION FACTOR FOR 1FTR-OPR (1HR-GR AVAIL)	1.750E-1
OEP-XHE-XX-NR02HGR1	CONVOLUTION FACTOR FOR 1FTR-OPR (2HR-GR AVAIL)	1.960E-1
OEP-XHE-XX-NR04HGR0	CONVOLUTION FACTOR FOR CCF-OPR (4HR-GR Avail)	2.340E-1
OEP-XHE-XX-NR04HGR1	CONVOLUTION FACTOR FOR 1FTR-OPR (4HR-GR AVAIL)	2.340E-1
OEP-XHE-XX-NR04HGR2	CONVOLUTION FACTOR FOR 2FTR-OPR (4HR-GR AVAIL)	9.180E-2

Event	Description	Probability
RCS-MDP-LK-BP1	RCP SEAL STAGE 1 INTEGRITY (BINDING/POPPING OPEN) FAILS	1.250E-2
RCS-MDP-LK-BP2	RCP SEAL STAGE 2 INTEGRITY (BINDING/POPPING OPEN) FAILS	2.000E-1

Lastly, the report provides event importance measures from the analysis. The importance measures list only those events that are greater than a predefined truncation.

RIR > 2.00E+00 (Only the top 20 basic events are shown)

Event Tree Importance

Group

Event	Occur.	Prob.	FV	RIR	RRR	Bb	Rll	RRl	Uncert.
NSW-MDP-CF-START	1367	1.396E-5	1.051E-1	6.014E+3	1.117E+0	3.833E-1	3.833E-1	6.702E-6	6.475E-6
NSW-MDP-CF-RUN	82	2.761E-8	1.989E-4	5.808E+3	1.000E+0	3.702E-1	3.702E-1	1.268E-8	4.164E-8
NSW-CKV-CF-PCKVS	41	2.964E-9	2.006E-5	5.531E+3	1.000E+0	3.525E-1	3.525E-1	1.279E-9	4.500E-9
DCP-BAT-CF-ALL	3	6.433E-8	2.362E-4	3.663E+3	1.000E+0	2.335E-1	2.335E-1	1.506E-8	3.924E-8
RPS-ROD-CF-RCCAS	163	1.210E-6	4.022E-3	3.039E+3	1.004E+0	1.937E-1	1.937E-1	2.563E-7	2.497E-7
AFW-PMP-CF-RUN	52	1.309E-7	2.900E-4	2.090E+3	1.000E+0	1.332E-1	1.332E-1	1.849E-8	3.619E-8
AFW-CKV-CF-125678	46	1.116E-7	2.464E-4	2.084E+3	1.000E+0	1.328E-1	1.328E-1	1.571E-8	3.371E-8
AFW-CKV-CF-113456	46	1.148E-7	2.535E-4	2.084E+3	1.000E+0	1.328E-1	1.328E-1	1.616E-8	3.971E-8
AFW-TNK-FC-CST1	37	4.800E-8	1.052E-4	2.069E+3	1.000E+0	1.318E-1	1.318E-1	6.703E-9	1.155E-8
AFW-CKV-CF-001214	37	5.796E-8	1.270E-4	2.069E+3	1.000E+0	1.318E-1	1.318E-1	8.094E-9	3.125E-8
AFW-CKV-CF-0331358	37	5.796E-8	1.270E-4	2.069E+3	1.000E+0	1.318E-1	1.318E-1	8.094E-9	3.125E-8
NSW-MOV-CF-16689A	388	2.280E-5	3.642E-2	1.557E+3	1.038E+0	9.919E-2	9.919E-2	2.321E-6	2.198E-6
EPS-SEQ-CF-DGAB	489	1.065E-4	1.009E-1	9.256E+2	1.112E+0	5.895E-2	5.894E-2	6.429E-6	9.195E-6
NSW-FAN-CF-FSALL	124	3.997E-6	3.524E-3	8.699E+2	1.004E+0	5.539E-2	5.539E-2	2.246E-7	4.396E-7
NSW-FAN-CF-FRALL	35	2.642E-7	2.281E-4	8.530E+2	1.000E+0	5.431E-2	5.431E-2	1.454E-8	2.141E-8
EPS-DGN-CF-1ABSTART	382	5.750E-5	1.342E-2	2.330E+2	1.014E+0	1.479E-2	1.479E-2	8.557E-7	1.059E-6
EPS-CRB-CF-1A1B	338	4.250E-5	9.916E-3	2.329E+2	1.010E+0	1.478E-2	1.478E-2	6.321E-7	1.459E-6
EPS-FAN-CF-FSALL	163	1.028E-5	2.385E-3	2.316E+2	1.002E+0	1.470E-2	1.470E-2	1.520E-7	2.758E-7
ACP-CRB-CF-A2030	270	4.250E-5	9.713E-3	2.282E+2	1.010E+0	1.448E-2	1.448E-2	6.191E-7	1.475E-6
EPS-MOD-CF-1205ALL	58	1.310E-6	2.977E-4	2.269E+2	1.000E+0	1.440E-2	1.440E-2	1.898E-8	2.668E-8
EPS-FAN-CF-FRALL	55	8.980E-7	2.037E-4	2.265E+2	1.000E+0	1.438E-2	1.438E-2	1.298E-8	1.739E-8
EPS-DGN-CF-DG1ABUN2S	107	1.861E-5	4.099E-3	2.201E+2	1.004E+0	1.396E-2	1.396E-2	2.613E-7	3.623E-7
DCP-BDC-LP-1BD1	269	9.600E-6	1.188E-3	1.243E+2	1.001E+0	7.857E-3	7.857E-3	7.572E-8	1.067E-7
NSW-MOV-OC-1669A	58	9.600E-7	9.689E-5	1.016E+2	1.000E+0	6.414E-3	6.414E-3	6.176E-9	8.708E-9
EPS-DGN-CF-1ABRUN	770	3.282E-4	3.121E-2	9.578E+1	1.032E+0	6.044E-3	6.042E-3	1.989E-6	1.474E-6
EPS-DGN-CF-DG1ABUN2R	212	1.214E-4	1.045E-2	8.680E+1	1.011E+0	5.470E-3	5.469E-3	6.658E-7	5.934E-7
NSW-MDP-TM-TRNB	3338	1.390E-3	1.098E-1	7.968E+1	1.123E+0	5.023E-3	5.016E-3	6.999E-6	9.873E-6
ACP-TFM-FC-1BB16X	256	2.160E-5	1.572E-3	7.363E+1	1.002E+0	4.630E-3	4.630E-3	1.002E-7	1.826E-7
ACP-BAC-LP-1BB16	154	9.600E-6	6.884E-4	7.256E+1	1.001E+0	4.561E-3	4.561E-3	4.388E-8	6.193E-8
ACP-CRB-CO-1BA0309	69	3.600E-6	2.499E-4	7.026E+1	1.000E+0	4.415E-3	4.415E-3	1.593E-8	1.124E-8
ACP-CRB-CO-1BB1601	69	3.600E-6	2.499E-4	7.026E+1	1.000E+0	4.415E-3	4.415E-3	1.593E-8	1.124E-8
ACP-BAC-LP-1BA03	151	9.600E-6	6.099E-4	6.441E+1	1.001E+0	4.042E-3	4.042E-3	3.888E-8	5.488E-8
AFW-MDP-CF-START	400	8.250E-5	5.048E-3	6.207E+1	1.005E+0	3.893E-3	3.893E-3	3.218E-7	3.407E-7
AFW-MOV-CF-FV51545	149	7.570E-6	4.508E-4	6.043E+1	1.000E+0	3.789E-3	3.789E-3	2.873E-8	3.909E-8
AFW-MDP-CF-RUN	111	3.910E-6	2.283E-4	5.927E+1	1.000E+0	3.715E-3	3.715E-3	1.455E-8	2.257E-8
AFW-ASF-CF-FT51554	83	2.347E-6	1.336E-4	5.783E+1	1.000E+0	3.623E-3	3.623E-3	8.518E-9	2.092E-8
DCP-BDC-LP-1AD1	213	9.600E-6	3.681E-4	3.930E+1	1.000E+0	2.441E-3	2.441E-3	2.346E-8	3.314E-8
NSW-MOV-CC-1668A	1862	1.000E-3	3.582E-2	3.674E+1	1.037E+0	2.280E-3	2.278E-3	2.283E-6	2.080E-6
EPS-SEQ-FC-DGA	2499	3.000E-3	1.024E-1	3.498E+1	1.114E+0	2.173E-3	2.166E-3	6.524E-6	9.153E-6

Event	Occur.	Prob.	FV	RIR	RRR	Bb	RII	RRI	Uncert.
ACP-BAC-LP-1ABB	146	9.600E-6	3.159E-4	3.387E+1	1.000E+0	2.096E-3	2.096E-3	2.014E-8	2.845E-8
ACP-BAC-LP-1AA02	129	9.600E-6	3.047E-4	3.271E+1	1.000E+0	2.022E-3	2.021E-3	1.942E-8	2.744E-8
NSW-FAN-TM-TRNB	993	6.830E-4	2.136E-2	3.223E+1	1.022E+0	1.992E-3	1.991E-3	1.362E-6	1.924E-6
ACP-CRB-CO-AB159	77	3.600E-6	1.119E-4	3.207E+1	1.000E+0	1.980E-3	1.980E-3	7.136E-9	5.041E-9
DCP-BDC-LP-1BD11	114	9.600E-6	2.892E-4	3.110E+1	1.000E+0	1.919E-3	1.919E-3	1.843E-8	2.605E-8
DCP-CRB-CO-1BD105	57	3.600E-6	1.029E-4	2.957E+1	1.000E+0	1.821E-3	1.821E-3	6.561E-9	4.635E-9
NSW-MOV-OC-1668A	41	9.600E-7	2.696E-5	2.906E+1	1.000E+0	1.789E-3	1.789E-3	1.719E-9	2.428E-9
AFW-MOV-OO-FV5154	606	1.000E-3	2.729E-2	2.824E+1	1.028E+0	1.738E-3	1.737E-3	1.740E-6	1.585E-6
AFW-MDP-FS-4002	704	1.500E-3	4.096E-2	2.824E+1	1.043E+0	1.739E-3	1.737E-3	2.611E-6	2.746E-6
AFW-MDP-FR-4002	455	5.379E-4	1.466E-2	2.822E+1	1.015E+0	1.736E-3	1.735E-3	9.346E-7	6.795E-7
AFW-ASF-FC-FT5154	190	7.200E-5	1.948E-3	2.804E+1	1.002E+0	1.724E-3	1.723E-3	1.242E-7	3.064E-7
ACP-TFM-FC-1BB07X	103	2.160E-5	5.773E-4	2.771E+1	1.001E+0	1.702E-3	1.702E-3	3.680E-8	6.714E-9

FV > 5.00E-03 (Only the top 20 basic events are shown)

Event Tree Importance

Group

Event	Occur.	Prob.	FV	RIR	RRR	Bb	RII	RRI	Uncert.
IE-LOOPGR	33819	1.000E+0	1.000E+0	1.000E+0	1.900E+3 8	6.375E-5	0.000E+0	6.375E-5	9.024E-5
EPS-ACP-SWYD	27981	4.000E-1	6.807E-1	2.021E+0	3.132E+0	1.085E-4	6.508E-5	4.339E-5	1.740E-5
EPS-DUAL-UNITLOOP	26625	5.790E-1	6.768E-1	1.492E+0	3.094E+0	7.452E-5	3.137E-5	4.315E-5	1.844E-5
RCS-MDP-LK-BP2	22144	2.000E-1	5.645E-1	3.097E+0	2.102E+0	1.671E-4	1.337E-4	3.343E-5	2.016E-5
EPS-XHE-XM-DGUN2	15130	1.000E+0	5.443E-1	1.000E+0	2.194E+0	3.469E-5	3.806E- 17	3.469E-5	0.000E+0
EPS-XHE-XL-NR04H	3295	5.568E-1	2.467E-1	1.196E+0	1.328E+0	2.825E-5	1.252E-5	1.573E-5	1.891E-6
OEP-XHE-XL-NR04HGR	11294	1.537E-1	2.467E-1	2.154E+0	1.265E+0	8.692E-5	7.356E-5	1.336E-5	7.088E-6
EPS-DGN-FR-DGA	4431	2.118E-2	2.144E-1	1.091E+1	1.273E+0	6.451E-4	6.315E-4	1.367E-5	8.435E-6
AFW-XHE-XM-TDPBD3	1933	1.000E-1	1.531E-1	2.378E+0	1.181E+0	9.760E-5	8.784E-5	9.761E-6	0.000E+0
AFW-XHE-XM-TDPBD	2073	3.000E-1	1.340E-1	1.310E+0	1.153E+0	2.823E-5	1.976E-5	8.469E-6	6.587E-6
LPI-MDP-CF-START	3606	4.180E-2	1.137E-1	3.606E+0	1.128E+0	1.734E-4	1.661E-4	7.248E-6	1.856E-6
OEP-XHE-XL-NR02HGR	4944	3.560E-1	1.100E-1	1.194E+0	1.120E+0	1.925E-5	1.240E-5	6.853E-6	2.258E-6
NSW-MDP-TM-TRNB	3338	1.390E-3	1.098E-1	7.968E+1	1.123E+0	5.023E-3	5.016E-3	6.999E-6	9.873E-6
NSW-MDP-CF-START	1367	1.396E-5	1.051E-1	6.014E+3	1.117E+0	3.833E-1	3.833E-1	6.702E-6	6.475E-6
EPS-SEQ-FC-DGA	2499	3.000E-3	1.024E-1	3.498E+1	1.114E+0	2.173E-3	2.166E-3	6.524E-6	9.153E-6
EPS-SEQ-CF-DGAB	489	1.065E-4	1.009E-1	9.256E+2	1.112E+0	5.895E-2	5.894E-2	6.429E-6	9.195E-6
EPS-DGN-FR-DGB	3671	2.118E-2	9.900E-2	5.575E+0	1.110E+0	2.979E-4	2.916E-4	6.310E-6	3.895E-6
AFW-MDP-TM-4002	819	4.000E-3	8.400E-2	2.190E+1	1.092E+0	1.338E-3	1.333E-3	5.354E-6	3.375E-6
EPS-DGN-TM-DGA	2627	1.200E-2	8.281E-2	7.816E+0	1.090E+0	4.398E-4	4.345E-4	5.279E-6	2.619E-6
EPS-DGN-FS-DGA	2652	5.000E-3	7.513E-2	1.594E+1	1.081E+0	9.573E-4	9.525E-4	4.789E-6	4.763E-6
NSW-P2P4R-P6ST	1890	3.330E-1	6.877E-2	1.138E+0	1.074E+0	1.316E-5	8.781E-6	4.384E-6	0.000E+0
NSW-P2P6R-P4ST	1890	3.330E-1	6.877E-2	1.138E+0	1.074E+0	1.316E-5	8.781E-6	4.384E-6	0.000E+0
NSW-P4P6R-P2ST	1890	3.330E-1	6.877E-2	1.138E+0	1.074E+0	1.316E-5	8.781E-6	4.384E-6	0.000E+0
EPS-DGN-TM-DGB	2425	1.200E-2	6.751E-2	6.557E+0	1.072E+0	3.585E-4	3.542E-4	4.303E-6	2.135E-6
RCS-MDP-LK-BP1	21360	1.250E-2	6.190E-2	5.227E+0	1.057E+0	2.729E-4	2.695E-4	3.412E-6	8.421E-6
EPS-SEQ-FC-DGB	2242	3.000E-3	4.866E-2	1.716E+1	1.051E+0	1.033E-3	1.030E-3	3.101E-6	4.353E-6
EPS-XHE-XL-NR01H	2821	7.857E-1	4.804E-2	1.013E+0	1.050E+0	3.898E-6	8.351E-7	3.062E-6	2.785E-7
OEP-XHE-XL-NR01HGR	3843	6.110E-1	4.804E-2	1.029E+0	1.048E+0	4.753E-6	1.849E-6	2.904E-6	5.906E-7
EPS-DGN-FS-DGB	2255	5.000E-3	4.794E-2	1.054E+1	1.050E+0	6.109E-4	6.079E-4	3.056E-6	3.039E-6
AFW-TDP-FS-4001	2684	7.000E-3	4.369E-2	7.197E+0	1.046E+0	3.978E-4	3.950E-4	2.785E-6	4.350E-6
AFW-MDP-FS-4002	704	1.500E-3	4.096E-2	2.824E+1	1.043E+0	1.739E-3	1.737E-3	2.611E-6	2.746E-6
OEP-XHE-XX-NR04HGR1	700	2.340E-1	4.059E-2	1.133E+0	1.042E+0	1.106E-5	8.470E-6	2.588E-6	3.008E-6

Event	Occur.	Prob.	FV	RIR	RRR	Bb	Rll	RRI	Uncert.
EPS-CRB-OO-1A1	1938	2.500E-3	3.748E-2	1.595E+1	1.039E+0	9.553E-4	9.529E-4	2.389E-6	2.846E-6
ACP-CRB-CC-AA20	1823	2.500E-3	3.738E-2	1.591E+1	1.039E+0	9.527E-4	9.504E-4	2.383E-6	2.838E-6
NSW-MOV-CF-16689A	388	2.280E-5	3.642E-2	1.557E+3	1.038E+0	9.919E-2	9.919E-2	2.321E-6	2.198E-6
NSW-MOV-CC-1668A	1862	1.000E-3	3.582E-2	3.674E+1	1.037E+0	2.280E-3	2.278E-3	2.283E-6	2.080E-6
NSW-P1P3R-P5ST	1011	3.330E-1	3.167E-2	1.063E+0	1.033E+0	6.063E-6	4.044E-6	2.019E-6	0.000E+0
NSW-P1P5R-P3ST	1011	3.330E-1	3.167E-2	1.063E+0	1.033E+0	6.063E-6	4.044E-6	2.019E-6	0.000E+0
NSW-P3P5R-P1ST	1011	3.330E-1	3.167E-2	1.063E+0	1.033E+0	6.063E-6	4.044E-6	2.019E-6	0.000E+0
EPS-DGN-CF-1ABRUN	770	3.282E-4	3.121E-2	9.578E+1	1.032E+0	6.044E-3	6.042E-3	1.989E-6	1.474E-6
AFW-MOV-OO-FV5154	606	1.000E-3	2.729E-2	2.824E+1	1.028E+0	1.738E-3	1.737E-3	1.740E-6	1.585E-6
NSW-MOV-CC-1669A	1522	1.000E-3	2.601E-2	2.696E+1	1.027E+0	1.657E-3	1.655E-3	1.658E-6	1.511E-6
NSW-MDP-TM-TRNA	2075	1.390E-3	2.556E-2	1.935E+1	1.026E+0	1.171E-3	1.170E-3	1.629E-6	2.303E-6
AFW-TDP-FR-4001	2164	4.102E-3	2.554E-2	7.199E+0	1.026E+0	3.968E-4	3.952E-4	1.628E-6	1.396E-6
AFW-TDP-TM-4001	2031	5.000E-3	2.550E-2	6.073E+0	1.026E+0	3.250E-4	3.234E-4	1.625E-6	1.145E-6
EPS-CRB-OO-1B1	1650	2.500E-3	2.390E-2	1.053E+1	1.024E+0	6.092E-4	6.077E-4	1.524E-6	1.815E-6
ACP-CRB-CC-BA30	1492	2.500E-3	2.356E-2	1.040E+1	1.024E+0	6.005E-4	5.990E-4	1.502E-6	1.789E-6
NSW-FAN-TM-TRNB	993	6.830E-4	2.136E-2	3.223E+1	1.022E+0	1.992E-3	1.991E-3	1.362E-6	1.924E-6
OEP-XHE-XX-NR04HGRO	59	2.340E-1	1.505E-2	1.049E+0	1.015E+0	4.101E-6	3.141E-6	9.596E-7	1.115E-6
AFW-MDP-FR-4002	455	5.379E-4	1.466E-2	2.822E+1	1.015E+0	1.736E-3	1.735E-3	9.346E-7	6.795E-7
EPS-DGN-CF-1ABSTART	382	5.750E-5	1.342E-2	2.330E+2	1.014E+0	1.479E-2	1.479E-2	8.557E-7	1.059E-6

- At this point, you have your report documenting details for the analysis and the results of the analysis.

But, the analysis is not yet complete. We still need to;

- evaluate the resulting cut sets
- review the importance measures
- consider model applicability/completeness
- use engineering experience along with PRA results for decision making, etc.

8.6 *Workshop*

9. CONDITION ASSESSMENT using ECA

Section 9 contains a description of how to perform a condition assessment using Events and Conditions Assessment (ECA) in SAPHIRE.

Conditions are those events that cannot be modeled as initiating events, but degrade the ability of the plant to respond to initiating events. Examples are equipment failures that do not cause a plant trip, or any event or operating condition that was not predicted or accounted for in the design basis.

Learning Objectives

- Demonstrate proficiency with ECA Workspace by performing the workshop exercises related to a condition type of event evaluation.

Section 9 Topics

- 9.1 Introduction
- 9.2 Event Description
- 9.3 Preliminary Steps for Condition Assessment
- 9.4 ECA Workspace Walk-Through
- 9.5 Workshop



9.1 Introduction

This section demonstrates how to use the ECA Workspace to evaluate events that involve component failures.

- ◇ Conditions are defined as operational occurrences (both real and hypothetical) that do not involve the occurrence of initiating events. Instead, a condition exists over a period of time that degrades the ability of the plant to respond to upsets.
- As an example of a condition assessment we will walk through the evaluation of a diesel generator unavailability event at the Generic PWR plant. Topics to be covered will be:
 - ◇ A discussion of the event to be modeled.
 - ◇ A discussion of the preliminary steps to analyze the event.
 - ◇ A demonstration of ECA Workspace to evaluate the event.
- The basic approach to the condition type of evaluation will be to determine the CCDP for the event occurring during the period in which the diesel was disabled.
 - ◇ We will then compare this CCDP with the CDP for the same period had the diesel been in its nominal state.
 - ◇ The difference in these two probabilities is a quantity that we will refer to as the *event importance*.
- The ECA Workspace will handle most of the calculational details of the analysis.
 - ◇ The analyst must
 - Determine the basic events in the PRA model that have to be modified to map the event into the model
 - Enter these changes through the ECA Condition Analysis interface

9.2 Event Description

In our example a diesel generator has failed a periodic functional test. When repair crews investigated, they found that the diesel generator (DG A) in division 1A of ac power had a plugged fuel filter. Some other relevant facts are:

- Investigation showed that the diesel generator had been non-functional for 100 hours.
- The other diesel generator (DG B) was also checked, but the plugging was found only in Diesel Generator A.
 - ◊ We are going to assume that a common cause failure was still *possible*. Declaring the failure to be independent requires much more evidence than we have at hand.
- There was no evidence that, had there been a diesel demand during this period, recovery of the diesels would have been affected by other (non-filter) issues.
 - ◊ We are going to leave the diesel recovery events in the SPAR model at their nominal values.
 - ◊ We are going to assume that recovery of the other components (if applicable) are left at their nominal values.

9.3 Preliminary Steps for Condition Assessment


Before we start the ECA Workspace and enter data we should know what model modifications we intend to make. From the event description we know that Diesel Generator A was failed for 100 hours, and that the potential for common cause could not be ruled out.

- For this analysis, we will use the Generic PWR model.
- The same diesel generator related events may appear in many fault trees since it is a support system and, consequently, transfers emergency power dependency to many front-line trees.
- From the EPS fault trees, we decide that we can map this event into the model by setting the basic event EPS-DGN-FS-DGA to **TRUE**. By recognizing that the Unit 1 diesels are a CCCG of size two, we know that we must also set EPS-DGN-CF-1ABRUN to FALSE.
- There is also one diesel generator at Unit 2 that appear in the EPS fault tree. Note that there is another CCCG consisting of all three diesels, represented by events EPS-DGN-CF-DG1ABUN2S and EPS-DGN-CF-DG1ABUN2R. To ensure that the values for these events are adjusted properly, we must also set the event representing the unobserved failure mode (EPS-DGN-FR-DGA) to 1.0.
- We can now start the ECA Workspace and enter our data.

9.4 ECA Workspace Walk-Through


This section will provide a step-by-step guide to performing an event evaluation for the condition described in the preceding section.

- Start the ECA workspace by double-clicking the **New ECA...** option in the Workspaces list panel.

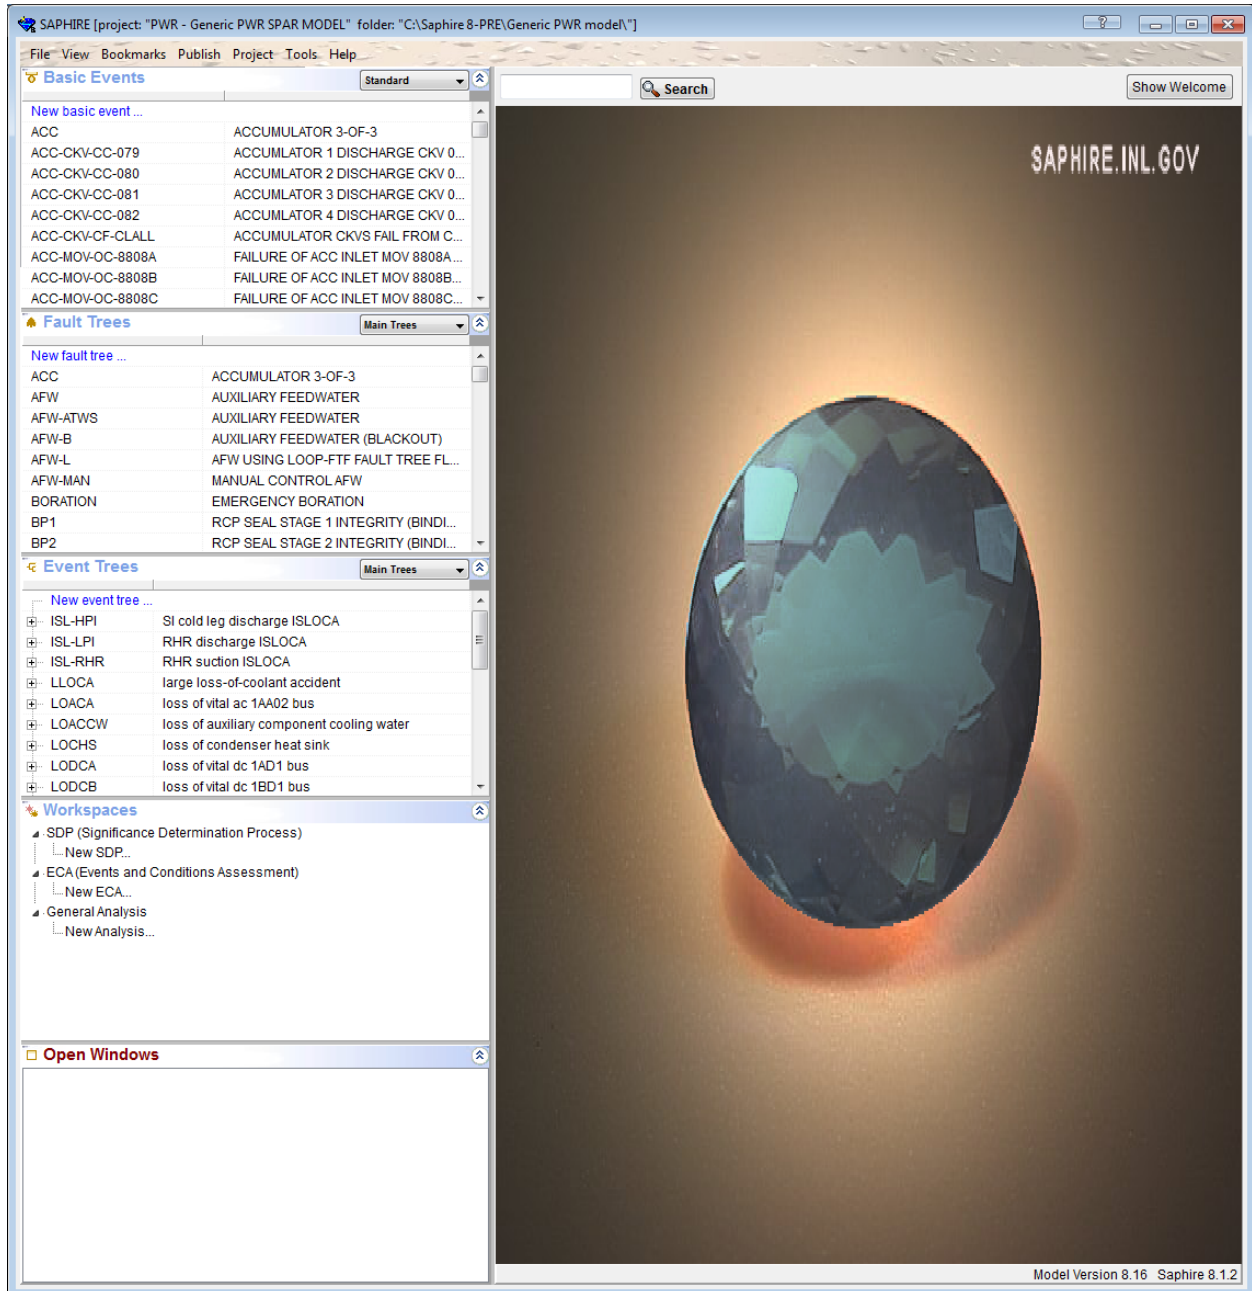


This example uses the Generic PWR SPAR model. Make sure this project is opened (i.e., currently working project).

- From the main screen, select the **Condition** radio button and select the **Next** button.



- The steps we are going to go through are:
 1. Make a blank analysis record in the database (a place to do the analysis)
 2. Add any required event modifications
 3. Process the analysis
 4. Specify the duration of the condition
 5. Review the results
- The ECA workshop will display the “identify affected items” screen, which lists all the basic events that are in the model. From the list of basic events, select the ones that match the assessment, by **clicking** the check box next to them.
- The “Identify affected items” screen allows the analyst to select those basic events that need to be modified based on the analysis, by **clicking** the check box next to them.

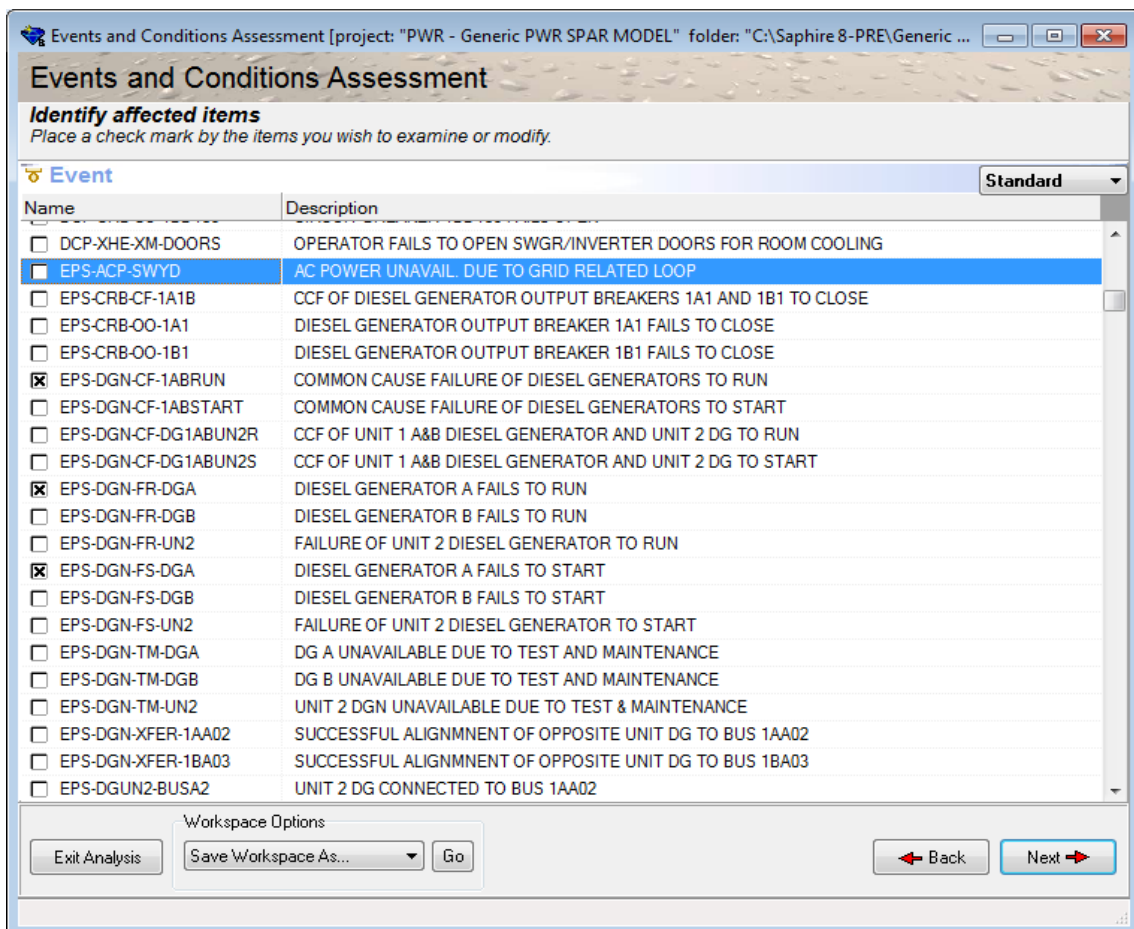

- The basic events that need to be included for this condition assessment are located by scrolling down the list and checking the check box. The basic events are EPS-DGN-CF-1ABRUN, EPS-DGN-FR-DGA, and EPS-DGN-FS-DGA.
- Select the Edit Option and then make the correct adjustments

Event	Modification Type	New Prob/Freq	Nominal Prob/Freq
EPS-DGN-CF-1ABRUN	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO RUN		
Edit	Edit	3.282E-4	3.282E-4
EPS-DGN-FR-DGA	DIESEL GENERATOR A FAILS TO RUN		
Edit	Edit	2.118E-2	2.118E-2
EPS-DGN-FS-DGA	DIESEL GENERATOR A FAILS TO START		
Edit	Edit	5.000E-3	5.000E-3

- Set **EPS-DGN-FS-DGA** to TRUE.

Modify Basic Event - (EPS-DGN-FS-DGA)

☐ New probability / frequency 5.00E-3

☒ Single Failure (with potential shared cause)

☐ Single Failure (without potential shared cause)

☐ No failure <False>

OK Cancel

- Set **EPS-DGN-CF-1ABRUN** to FALSE.

Modify Basic Event - (EPS-DGN-CF-1ABRUN)

☐ New probability / frequency 3.28E-4

☐ Single Failure (with potential shared cause)

☐ Single Failure (without potential shared cause)

☒ No failure <False>

OK Cancel

- Set **EPS-DGN-FR-DGA** to 1.0.

Modify Basic Event - (EPS-DGN-FR-DGA)

☒ New probability / frequency 1.0

☐ Single Failure (with potential shared cause)

☐ Single Failure (without potential shared cause)

☐ No failure <False>

OK Cancel

- Once the basic events have been adjusted select the **Next** button.

The following evaluation screen will appear. Each section will be discussed.


Method of Solving

The difference between the single pass with cut set update and the multi-pass routines are:

- The multiple pass solution algorithm will ensure that all sequence post-processing rules are applied even when basic events in the model are specified as a logical “True.” The “single pass with cut set update option” does not.
- The multiple pass algorithm will remove non-minimal cut sets (if generated from a post-processing rule) by automatically performing a cut set update.


- SAPHIRE 8 performs the “nominal case” and the “new case” solving at the same truncation level for both algorithms.
- The “Turn off all T&M events will set all test and maintenance events to 0.0 and then resolve the model, prior to evaluation.

Specify Duration

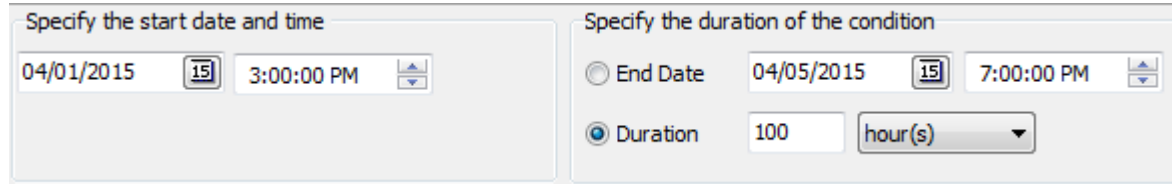


- The duration of the event can be specified by entering the start of the event (both day and time) and the end of the event (both day and time) or the number of hours the event lasted. In this case, the duration of 100 hours was specified.

Cut Set Truncation

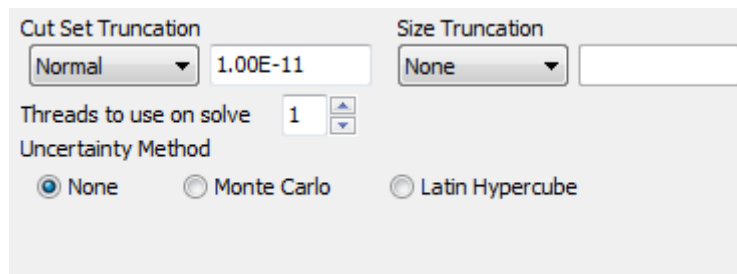

- The nominal truncation will solve all sequences at this truncation (it defaults to the model’s default).
- Uncertainty will be evaluated when solving the model (see NUREG/CR-7039, Volume 5, Section 2.7).


Description

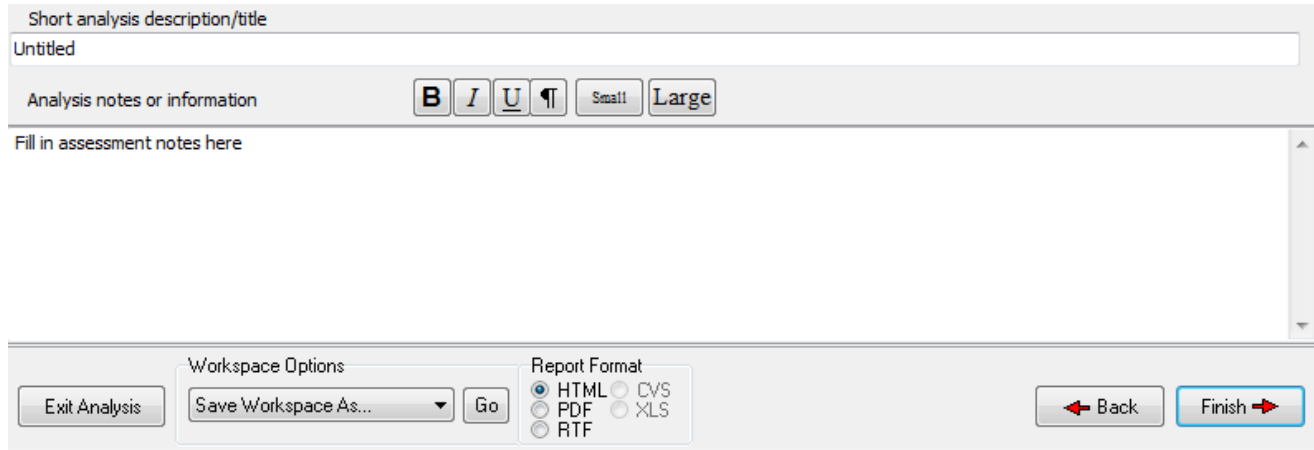

The screenshot shows the SAPHIRE analysis setup window. It has a title bar 'Short analysis description/title' with a text field containing 'Untitled'. Below this is a section 'Analysis notes or information' with a rich text editor containing the text 'Fill in assessment notes here'. The rich text editor has buttons for Bold (B), Italic (I), Underline (U), and a list bullet icon, as well as 'Small' and 'Large' font size buttons. At the bottom, there is a 'Workspace Options' section with a 'Save Workspace As...' dropdown and a 'Go' button. To the right is a 'Report Format' section with radio buttons for HTML (selected), PDF, and RTF, and checkboxes for CVS and XLS. On the far left is an 'Exit Analysis' button. On the far right are 'Back' and 'Finish' buttons.

A title can be specified to identify the type of assessment being performed. Also, a description of the event and the components that were affected can be described in the analysis notes block.

- Once all of the information has been selected, click the Finish button and SAPHIRE will process the analysis. The following screen just cautions the analyst that the evaluation may take extra time depending upon the complexity of the model.

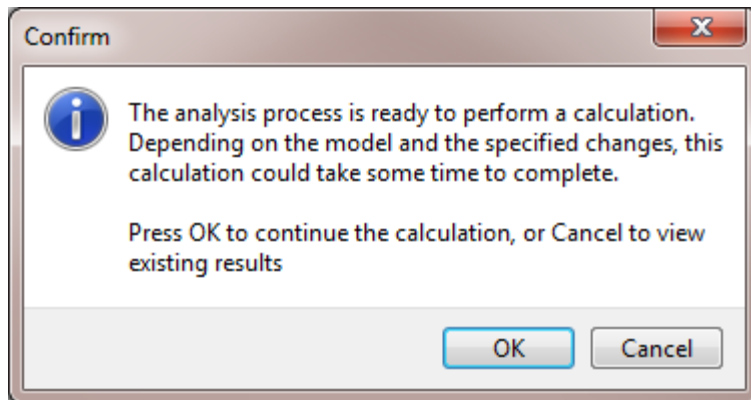

- When finished, SAPHIRE will display the Event Assessment screen. The ΔCCDP for the event will also be displayed.
- Once the evaluation is complete SAPHIRE will provide a summary report of the evaluation. Each of the pieces of the output will be discussed.

The first part is the overall result.

Condition Assessment Summary

Event Date	4/1/2015 3:00:00 PM to 4/1/2015 7:00:00 PM
Duration	100 hours
CCDP	8.879E-7
CDP	5.023E-7
Delta CDP	3.856E-7

Solve Settings

Solve Settings

Cut Set Truncation	Normal 1.00E-11
Size Truncation	None
Solve Method	Multiple Pass

Summary of Events Changed

Summary of Conditional Event Changes

Event	Description	Cond Type	Cond Value	Nominal Type	Nominal Value
EPS-DGN-CF-1ABRUN	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO RUN	F	False	C	3.282E-4
EPS-DGN-FR-DGA	DIESEL GENERATOR A FAILS TO RUN	1	1.00E+0	C	2.118E-2
EPS-DGN-FS-DGA	DIESEL GENERATOR A FAILS TO START	T	True	1	5.000E-3
EPS-DGN-CF-1ABSTART	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO START	C	1.150E-2	C	5.750E-5
EPS-DGN-CF-1ABRUN	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO RUN	F	False	C	3.282E-4
EPS-DGN-CF-DG1ABUN2R	CCF OF UNIT 1 A&B DIESEL GENERATOR AND UNIT 2 DG TO RUN	C	6.665E-4	C	1.214E-4
EPS-DGN-CF-DG1ABUN2S	CCF OF UNIT 1 A&B DIESEL GENERATOR AND UNIT 2 DG TO START	C	3.722E-3	C	1.861E-5

Implied Event Changes as per RASP Guidance

Event	Description	Cond Type	Cond Value	Nominal Type	Nominal Value
EPS-DGN-TM-DGA	DG A UNAVAILABLE DUE TO TEST AND MAINTENANCE	T	True	1	1.200E-2
EPS-DGN-TM-DGA	DG A UNAVAILABLE DUE TO TEST AND MAINTENANCE	T	True	1	1.200E-2

Results from the evaluation listing the dominant event tree and dominant sequences.

Event Tree Dominant Results

Only items contributing at least 1.0% to the total CCDP are displayed.

Event Tree	CCDP	CDP	Delta CDP	Description
LOOPGR	1.910E-7	9.423E-9	1.816E-7	loss of offsite power (Grid related)
LOOPWR	1.164E-7	4.996E-9	1.114E-7	loss of offsite power (Weather related)
LOOPSC	7.234E-8	3.821E-9	6.852E-8	loss of offsite power (Switchyard centered)
LOOPPC	1.142E-8	6.038E-10	1.082E-8	loss of offsite power (Plant Centered)
TRANS	1.947E-8	9.042E-9	1.043E-8	general transient
Total	8.879E-7	5.023E-7	3.856E-7	

Referenced Fault Trees

Fault Tree	Description
AFW-B	AUXILIARY FEEDWATER (BLACKOUT)
AFW-L	AFW USING LOOP-FTF FAULT TREE FLAGS FAULT TREE
AFW-MAN	MANUAL CONTROL AFW
BP1	RCP SEAL STAGE 1 INTEGRITY (BINDING/POPPING)
BP2	RCP SEAL STAGE 2 INTEGRITY (BINDING/POPPING)
DGR-01H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 1 HOUR
DGR-04H	DIESEL GENERATOR RECOVERY (IN 4 HR)
EPS	EMERGENCY POWER
FAB-L	FEED AND BLEED IS UNAVAILABLE using LOOP-FTF
HPI	HIGH PRESSURE INJECTION
HPI-L	HIGH PRESSURE INJECTION
LOSC	RCP SEAL COOLING MAINTAINED
LOSC-L	RCPSL USING LOOP-FTF FAULT TREE FLAGS
LPI	LOW PRESSURE INJECTION
LPR	LOW PRESSURE RECIRC
OPR-01H	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR
OPR-02H	OFFSITE POWER RECOVERY IN 2 HRS
OPR-04H	OFFSITE POWER RECOVERY (IN 4 HR)
PWR-REC-24H	LATE POWER RECOVERY (24 HR)
SG-DEP-LT1	DEPRESSURIZE SGs (DEPENDENT)
SG-DEP-LT2	DEPRESSURIZE SGs (DEPENDENT)

Dominant Sequence Results

Only items contributing at least 1.0% to the total CCDP are displayed.

Event Tree	Sequence	CCDP	CDP	Delta CDP	Flagset	Description
LOOPGR	16-03-10	5.309E-8	1.765E-9	5.133E-8	ETF-SBO-GR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, /BP2, OPR-04H, DGR-04H, AFW-MAN, SG-DEP-LT1
LOOPGR	15	4.803E-8	2.760E-9	4.526E-8	ETF-LOOP-GR	/RPS-L, /EPS, AFW-L, FAB-L

Event Tree	Sequence	CCDP	CDP	Delta CDP	Flagset	Description
LOOPGR	16-06	4.425E-8	1.466E-9	4.278E-8	ETF-SBO-GR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, BP2, OPR-04H, DGR-04H
LOOPWR	16-03-10	4.340E-8	1.561E-9	4.184E-8	ETF-SBO-WR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, /BP2, OPR-04H, DGR-04H, AFW-MAN, SG-DEP-LT1
LOOPWR	16-06	3.618E-8	1.299E-9	3.488E-8	ETF-SBO-WR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, BP2, OPR-04H, DGR-04H
LOOPSC	15	2.684E-8	1.524E-9	2.531E-8	ETF-LOOP-SC	/RPS-L, /EPS, AFW-L, FAB-L
LOOPGR	16-45	1.919E-8	6.002E-10	1.859E-8	ETF-SBO-GR	/RPS-L, EPS, AFW-B, OPR-01H, DGR-01H
LOOPSC	16-03-10	1.526E-8	4.997E-10	1.476E-8	ETF-SBO-SC	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, /BP2, OPR-04H, DGR-04H, AFW-MAN, SG-DEP-LT1
LOOPSC	16-06	1.272E-8	4.156E-10	1.230E-8	ETF-SBO-SC	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, BP2, OPR-04H, DGR-04H
LOOPWR	15	1.244E-8	6.912E-10	1.175E-8	ETF-LOOP-WR	/RPS-L, /EPS, AFW-L, FAB-L
LOOPGR	02-05	9.889E-9	1.280E-9	8.610E-9	ETF-LOOP-GR	/RPS-L, /EPS, /AFW-L, /PORV-L, LOSE-L, /RSD-L, /BP1, BP2, OPR-02H, HPI-L
LOOPWR	16-03-04	8.624E-9	3.034E-10	8.321E-9	ETF-SBO-WR	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, /BP1, /BP2, OPR-04H, DGR-04H, /AFW-MAN, /CST-REFILL-LT1, SG-DEP-LT2, PWR-REC-24H
LOOPGR	16-10-2	8.530E-9	4.263E-10	8.103E-9	ETF-LOOPGR-MLOCA	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, BP1, BP2, /OPR-02H, /HPI, /SSC, LPR
TRANS	02-02-09	7.669E-9	3.493E-10	7.320E-9	ETF-TRANS-SLOCA	/RPS, /AFW, /PORV, LOSE, /RCPT, /RSD, /BP1, BP2, HPI, /SSC1, LPI
LOOPSC	16-45	6.554E-9	1.984E-10	6.355E-9	ETF-SBO-SC	/RPS-L, EPS, AFW-B, OPR-01H, DGR-01H
LOOPWR	16-45	6.547E-9	2.120E-10	6.335E-9	ETF-SBO-WR	/RPS-L, EPS, AFW-B, OPR-01H, DGR-01H
LOOPPC	15	5.316E-9	2.831E-10	5.033E-9	ETF-LOOP-PC	/RPS-L, /EPS, AFW-L, FAB-L
LOOPSC	16-10-2	4.768E-9	2.360E-10	4.532E-9	ETF-LOOPSC-MLOCA	/RPS-L, EPS, /AFW-B, /PORV-B, /RSD-B, BP1, BP2, /OPR-02H, /HPI, /SSC, LPR
Total		8.879E-7	5.023E-7	3.856E-7		

A report of the top 1% dominant cut sets for each dominant sequence is provided. (Just the cut sets for sequence LOOPGR 16-03-10 will be illustrated.)

Cut Set Report - LOOPGR 16-03-10

#	Prob/Freq	Total %	Cut Set
	4.651E-6	100	Displaying 219 of 219 Cut Sets.
1	1.049E-6	22.55	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-TM-DGB,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
2	1.005E-6	21.61	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-CF-1ABSTART,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2

3	4.370E-7	9.4	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-FS-DGB,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
4	4.331E-7	9.31	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-FR-DGB,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,OEP-XHE-XX-NR04HGR1,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
5	3.253E-7	6.99	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-CF-DG1ABUN2S,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
6	2.622E-7	5.64	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-SEQ-FC-DGB,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
7	2.185E-7	4.7	IE-LOOPGR,ACP-CRB-CC-BA30,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
8	2.185E-7	4.7	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-CRB-OO-1B1,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
9	1.699E-7	3.65	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DGN-FR-DGB,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,OEP-XHE-XL-NR04HGR,OEP-XHE-XX-NR04HGR2,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
10	1.215E-7	2.61	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,NSW-MDP-TM-TRNB,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
11	8.740E-8	1.88	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,NSW-MOV-CC-1669A,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2
12	5.969E-8	1.28	IE-LOOPGR,AFW-XHE-XM-TDPBD,EPS-ACP-SWYD,EPS-DUAL-UNITLOOP,EPS-XHE-XL-NR04H,EPS-XHE-XM-DGUN2,NSW-FAN-TM-TRNB,OEP-XHE-XL-NR04HGR,/RCS-MDP-LK-BP1,/RCS-MDP-LK-BP2

Referenced Events- lists all of the basic events that part of the cut sets generated from the analysis.

Referenced Events

Event	Description	Probability
ACP-CRB-CC-BA30	FAILURE OF SWITCHYARD AC BREAKER BA30 TO OPEN	2.500E-3
ACP-VCF-FC-SWYRD	FAILURE OF SWITCHYARD AC POWER TO BUSES	7.970E-5
ACP-XHE-XM-ACNLP	OPERATOR FAILS TO ALIGN AC POWER GIVEN NON-LOOP IE	1.000E-1
ACW-P1-RUNNING	ACW PUMP P1 RUNNING	5.000E-1
ACW-P2-RUNNING	ACW PUMP P2 RUNNING	5.000E-1
AFW-MDP-FR-4002	AFW MOTOR-DRIVEN PUMP P4-4002 FAILS TO RUN	5.379E-4
AFW-MDP-FS-4002	AFW MOTOR-DRIVEN PUMP P4-4002 FAILS TO START	1.500E-3
AFW-MDP-TM-4002	AFW MDP P4-4002 UNAVAILABLE DUE TO TEST AND MAINTENANCE	4.000E-3
AFW-MOV-CC-HV5106	STEAM SUPPLY MOV HV5106 FAILS TO OPEN	1.000E-3
AFW-MOV-OO-FV5154	FAILURE OF AFW MDP B MINFLOW MOV 5154 TO CLOSE	1.000E-3
AFW-TDP-FR-4001	TURBINE DRIVEN FEED PUMP P4-001 FAILS TO RUN	4.102E-3
AFW-TDP-FS-4001	TURBINE DRIVEN FEED PUMP P4-001 FAILS TO START	7.000E-3
AFW-TDP-TM-4001	AFW TDP PUMP P4-001 IS IN TEST OR MAINTENANCE	5.000E-3
AFW-XHE-XM-TDPBD	OPERATOR FAILS TO CONTROL AFW TDP AFTER BATTERY DEPLETION	3.000E-1
AFW-XHE-XM-TDPBD3	OPERATOR FAILS TO CONTROL AFW TDP AFTER BATTERY DEPLETION; NON SBO	1.000E-1

Event	Description	Probability
EPS-ACP-SWYD	AC POWER UNAVAIL. DUE TO GRID RELATED LOOP	4.000E-1
EPS-CRB-OO-1B1	DIESEL GENERATOR OUTPUT BREAKER 1B1 FAILS TO CLOSE	2.500E-3
EPS-DGN-CF-1ABSTART	COMMON CAUSE FAILURE OF DIESEL GENERATORS TO START	1.150E-2
EPS-DGN-CF-DG1ABUN2S	CCF OF UNIT 1 A&B DIESEL GENERATOR AND UNIT 2 DG TO START	3.722E-3
EPS-DGN-FR-DGB	DIESEL GENERATOR B FAILS TO RUN	2.118E-2
EPS-DGN-FS-DGB	DIESEL GENERATOR B FAILS TO START	5.000E-3
EPS-DGN-TM-DGB	DG B UNAVAILABLE DUE TO TEST AND MAINTENANCE	1.200E-2
EPS-DUAL-UNITLOOP	DUAL UNIT LOOP	5.790E-1
EPS-SEQ-FC-DGB	DGB Sequencer Fails To Operate	3.000E-3
EPS-XHE-XL-NR01H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 1 HOUR	7.857E-1
EPS-XHE-XL-NR04H	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 4 HOURS	5.568E-1
EPS-XHE-XL-NR24H4	OPERATOR FAILS TO RECOVER EMERGENCY DIESEL IN 24 HOURS (GIVEN FAILURE AT 4)	2.843E-1
EPS-XHE-XM-DGUN2	OPERATOR FAILS TO CROSS-TIE UNIT 2 DIESEL GENERATOR	1.000E+0
IE-LOOPGR	LOSS OF OFFSITE POWER INITIATOR (GRID-RELATED)	1.860E-2
IE-LOOPPC	LOSS OF OFFSITE POWER INITIATOR (PLANT-CENTERED)	2.070E-3
IE-LOOPSC	LOSS OF OFFSITE POWER INITIATOR (SWITCHYARD-RELATED)	1.040E-2
IE-LOOPWR	LOSS OF OFFSITE POWER INITIATOR (WEATHER-RELATED)	4.830E-3
IE-TRANS	TRANSIENT	8.000E-1
NSW-FAN-TM-TRNB	NSCW TRAIN B TOWER FANS Test & Maint(PSA value)	6.830E-4
NSW-MDP-TM-TRNB	NSW TRAIN B MDPS UNAVAILABLE DUE MAINTENANCE (PSA PROB)	1.390E-3
NSW-MOV-CC-1669A	NSW TRAIN B MOV 1669A TO CT FAILS TO OPEN	1.000E-3
NSW-MOV-CF-16689A	NSW TRAIN A/B MOV 1668A/1669A TO CT CCF TO OPEN	2.280E-5
NSW-P2P4R-P6ST	P002, P004 RUN AND P006 STANDBY	3.330E-1
NSW-P2P6R-P4ST	P002, P006 RUN AND P004 STANDBY	3.330E-1
NSW-P4P6R-P2ST	P004, P006 RUN AND P002 STANDBY	3.330E-1
OEP-XHE-XL-NR01H	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR	5.302E-1
OEP-XHE-XL-NR01HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR (GRID-RELATED)	6.110E-1
OEP-XHE-XL-NR01HSC	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR (SWITCHYARD)	3.779E-1
OEP-XHE-XL-NR01HWR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 1 HOUR (WEATHER-RELATED)	6.555E-1
OEP-XHE-XL-NR02HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 2 HOURS (GRID-RELATED)	3.560E-1
OEP-XHE-XL-NR04HGR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 4 HOURS (GRID-RELATED)	1.537E-1
OEP-XHE-XL-NR04HSC	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 4 HOURS (SWITCHYARD)	7.861E-2
OEP-XHE-XL-NR04HWR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 4 HOURS (WEATHER-RELATED)	3.824E-1
OEP-XHE-XL-NR24H4WR	OPERATOR FAILS TO RECOVER OFFSITE POWER IN 24 HOURS (FAIL @ 4) (WEATHER-RELATE D)	2.994E-1
OEP-XHE-XX-NR01HGR1	CONVOLUTION FACTOR FOR 1FTR-OPR (1HR-GR AVAIL)	1.750E-1
OEP-XHE-XX-NR01HSC1	CONVOLUTION FACTOR FOR 1FTR-OPR (1HR-SC AVAIL)	1.580E-1
OEP-XHE-XX-NR01HWR1	CONVOLUTION FACTOR FOR 1FTR-OPR (1HR-WR AVAIL)	4.080E-1
OEP-XHE-XX-NR01HWR2	CONVOLUTION FACTOR FOR 2FTR-OPR (1HR-WR AVAIL)	2.800E-1
OEP-XHE-XX-NR04HGR1	CONVOLUTION FACTOR FOR 1FTR-OPR (4HR-GR AVAIL)	2.340E-1
OEP-XHE-XX-NR04HGR2	CONVOLUTION FACTOR FOR 2FTR-OPR (4HR-GR AVAIL)	9.180E-2
OEP-XHE-XX-NR04HSC1	CONVOLUTION FACTOR FOR 1FTR-OPR (4HR-SC AVAIL)	2.400E-1
OEP-XHE-XX-NR04HSC2	CONVOLUTION FACTOR FOR 2FTR-OPR (4HR-SC AVAIL)	9.910E-2
OEP-XHE-XX-NR04HWR1	CONVOLUTION FACTOR FOR 1FTR-OPR (4HR-WR AVAIL)	5.280E-1
OEP-XHE-XX-NR04HWR2	CONVOLUTION FACTOR FOR 2FTR-OPR (4HR-WR AVAIL)	4.050E-1
RCS-MDP-LK-BP1	RCP SEAL STAGE 1 INTEGRITY (BINDING/POPPING OPEN) FAILS	1.250E-2
RCS-MDP-LK-BP2	RCP SEAL STAGE 2 INTEGRITY (BINDING/POPPING OPEN) FAILS	2.000E-1

Lastly, the report provides event importance measures from the analysis. The importance measures list only those events that are greater than a predefined truncation.

RIR > 2.00E+00 (> 50 for illustration)
Event Tree Importance

Group

Event	Occur.	Prob.	FV	RIR	RRR	Bb	RII	RRI	Uncert.
IE-XLOCA	1	1.000E-7	1.289E-3	1.289E+4	1.001E+0	1.000E+0	1.000E+0	1.000E-7	1.826E-7
RPS-ROD-CF-RCCAS	165	1.210E-6	3.275E-3	2.487E+3	1.003E+0	1.928E-1	1.928E-1	2.539E-7	2.486E-7
NSW-MDP-CF-RUN	54	2.761E-8	7.433E-5	2.445E+3	1.000E+0	1.896E-1	1.896E-1	5.766E-9	2.133E-8
RPS-BME-CF-RTBAB	72	1.610E-6	4.006E-3	2.303E+3	1.004E+0	1.786E-1	1.786E-1	3.107E-7	8.236E-7
IE-ISL-RHR	3	5.621E-6	1.011E-2	1.799E+3	1.010E+0	1.395E-1	1.395E-1	7.839E-7	0.000E+0
RPS-TXX-CF-6OF8	71	2.700E-6	3.342E-3	1.192E+3	1.003E+0	9.235E-2	9.235E-2	2.592E-7	1.036E-6
IE-LONSW	491	4.000E-4	3.658E-1	9.152E+2	1.577E+0	7.094E-2	7.091E-2	2.838E-5	4.013E-5
AFW-PMP-CF-RUN	31	1.309E-7	9.438E-5	7.123E+2	1.000E+0	5.518E-2	5.518E-2	7.317E-9	1.499E-8
AFW-CKV-CF-125678	30	1.116E-7	8.034E-5	7.115E+2	1.000E+0	5.511E-2	5.511E-2	6.229E-9	1.399E-8
AFW-CKV-CF-113456	30	1.148E-7	8.265E-5	7.115E+2	1.000E+0	5.511E-2	5.511E-2	6.407E-9	1.649E-8
AFW-CKV-CF-001214	21	5.796E-8	4.091E-5	6.996E+2	1.000E+0	5.419E-2	5.419E-2	3.172E-9	1.285E-8
AFW-CKV-CF-0331358	21	5.796E-8	4.091E-5	6.996E+2	1.000E+0	5.419E-2	5.419E-2	3.172E-9	1.285E-8
AFW-TNK-FC-CST1	19	4.800E-8	3.364E-5	6.952E+2	1.000E+0	5.385E-2	5.385E-2	2.608E-9	4.719E-9
ACP-VCF-FC-SWYRD	2682	7.970E-5	1.545E-2	1.931E+2	1.016E+0	1.490E-2	1.490E-2	1.198E-6	1.680E-6
IE-ISL-LPI	3	3.268E-6	6.048E-4	1.861E+2	1.001E+0	1.435E-2	1.435E-2	4.691E-8	0.000E+0
NSW-MDP-CF-START	426	1.396E-5	2.356E-3	1.430E+2	1.002E+0	1.101E-2	1.101E-2	1.826E-7	1.860E-7
IE-LLOCA	21	2.500E-6	2.524E-4	1.019E+2	1.000E+0	7.830E-3	7.830E-3	1.958E-8	3.574E-8
DCP-BAT-CF-ALL	3	6.433E-8	6.498E-6	1.019E+2	1.000E+0	7.827E-3	7.827E-3	5.035E-10	1.316E-9
NSW-FAN-CF-FSALL	56	3.997E-6	3.553E-4	8.788E+1	1.000E+0	6.739E-3	6.739E-3	2.754E-8	5.348E-8
NSW-FAN-CF-FRALL	12	2.642E-7	2.223E-5	8.397E+1	1.000E+0	6.436E-3	6.436E-3	1.724E-9	2.537E-9
ACP-BAC-LP-1BA03	167	9.600E-6	7.241E-4	6.299E+1	1.001E+0	4.809E-3	4.809E-3	5.611E-8	6.529E-8
HPI-TNK-FC-RWST	2	4.800E-8	2.847E-6	6.030E+1	1.000E+0	4.600E-3	4.600E-3	2.208E-10	4.031E-10

FV > 5.00E-03 (>0.1 for illustration)
Event Tree Importance

Group

Event	Occur.	Prob.	FV	RIR	RRR	Bb	RII	RRI	Uncert.
RCS-MDP-LK-BP2	9362	2.000E-1	5.449E-1	2.815E+0	2.008E+0	1.797E-4	1.408E-4	3.894E-5	2.168E-5
EPS-ACP-SWYD	12101	4.000E-1	4.464E-1	1.669E+0	1.806E+0	8.650E-5	5.187E-5	3.463E-5	1.387E-5
EPS-DUAL-UNITLOOP	9746	5.790E-1	4.313E-1	1.313E+0	1.758E+0	5.775E-5	2.430E-5	3.345E-5	1.429E-5
EPS-XHE-XM-DGUN2	4637	1.000E+0	3.721E-1	1.000E+0	1.593E+0	2.886E-5	9.216E-19	2.886E-5	0.000E+0
IE-LONSW	491	4.000E-4	3.658E-1	9.152E+2	1.577E+0	7.094E-2	7.091E-2	2.838E-5	4.013E-5
NSW-XHE-XL-NOREC	487	3.400E-1	3.657E-1	1.643E+0	1.576E+0	7.826E-5	4.990E-5	2.836E-5	1.266E-5
EPS-XHE-XL-NR04H	2264	5.568E-1	2.489E-1	1.198E+0	1.331E+0	3.465E-5	1.535E-5	1.930E-5	2.319E-6
IE-LOOPGR	4414	1.860E-2	2.157E-1	1.238E+1	1.275E+0	8.994E-4	8.826E-4	1.673E-5	2.368E-5
AFW-XHE-XM-TDPBD3	1425	1.000E-1	1.771E-1	2.591E+0	1.215E+0	1.371E-4	1.234E-4	1.373E-5	0.000E+0
NSW-P2P4R-P6ST	1149	3.330E-1	1.431E-1	1.268E+0	1.159E+0	3.145E-5	2.082E-5	1.064E-5	0.000E+0
NSW-P2P6R-P4ST	1149	3.330E-1	1.431E-1	1.268E+0	1.159E+0	3.145E-5	2.082E-5	1.064E-5	0.000E+0
NSW-P4P6R-P2ST	1149	3.330E-1	1.431E-1	1.268E+0	1.159E+0	3.145E-5	2.082E-5	1.064E-5	0.000E+0
NSW-P1P3R-P5ST	1003	3.330E-1	1.395E-1	1.261E+0	1.154E+0	3.062E-5	2.026E-5	1.036E-5	0.000E+0
NSW-P1P5R-P3ST	1003	3.330E-1	1.395E-1	1.261E+0	1.154E+0	3.062E-5	2.026E-5	1.036E-5	0.000E+0
NSW-P3P5R-P1ST	1003	3.330E-1	1.395E-1	1.261E+0	1.154E+0	3.062E-5	2.026E-5	1.036E-5	0.000E+0
ACP-XHE-XL-	779	1.000E+0	1.370E-1	1.000E+0	1.159E+0	1.062E-5	-9.893E-	1.062E-5	0.000E+0

Event	Occur.	Prob.	FV	RIR	RRR	Bb	RII	RRI	Uncert.
REC4160A							19		
IE-LOACA	779	9.000E-3	1.370E-1	1.608E+1	1.159E+0	1.180E-3	1.170E-3	1.062E-5	3.756E-6
IE-LOOPWR	2886	4.830E-3	1.314E-1	2.807E+1	1.151E+0	2.110E-3	2.100E-3	1.019E-5	1.442E-5
AFW-XHE-XM-TDPBD	1625	3.000E-1	1.300E-1	1.291E+0	1.143E+0	3.224E-5	2.256E-5	9.676E-6	7.523E-6
OEP-XHE-XL-NR04HGR	1296	1.537E-1	1.119E-1	1.613E+0	1.126E+0	5.620E-5	4.755E-5	8.651E-6	4.583E-6
AFW-MDP-TM-4002	572	4.000E-3	1.114E-1	2.842E+1	1.125E+0	2.135E-3	2.127E-3	8.633E-6	5.387E-6
OEP-XHE-XL-NR04HWR	932	3.824E-1	1.009E-1	1.162E+0	1.112E+0	2.038E-5	1.258E-5	7.805E-6	2.232E-6

- At this point, you have your report documenting details for the analysis and the results of the analysis.

But, again, the analysis is just beginning...

- Evaluate the resulting cut sets.
- Review the importance measures.
- Consider model applicability/completeness.
- Use engineering experience along with PRA results.

9.5 Workshop

10. CONSIDERATIONS OF UNCERTAINTY

Section 10 describes uncertainty analysis utilized in the ECA Workspace. An overview of uncertainty methods, parameter uncertainty, model uncertainty, steps required to perform an uncertainty evaluation, and an example uncertainty analysis will be presented.

Learning Objectives


- Describe the difference between aleatory and epistemic uncertainty.
- Indicate the two uncertainty sampling analysis techniques available in the ECA Workspace.
- Describe the major topic areas that need to be addressed to incorporate parameter uncertainty.
- Outline the steps to perform an uncertainty evaluation within the ECA Workspace.

Section 10 Topics

- 10.1 Overview of Uncertainty
- 10.2 Other Uncertainty Considerations
- 10.3 Steps to Perform an Epistemic Uncertainty Evaluation
- 10.4 Example Uncertainty Analysis
- 10.5 Workshop

10.1 Overview of Uncertainty

- Uncertainty analysis estimates the variability of the event analysis results (e.g., CCDP, $\text{Importance}_{\text{event}}$) resulting from uncertainties in:
 - ◇ Basic event probabilities
 - ◇ Initiating event frequency
 - ◇ Model structure
 - ◇ Analysis assumptions.
- In general, a PRA has two parts to it.
 - ◇ **Deterministic.** For example, the thermal-hydraulic calculations that support the event tree structure and the fault tree success criteria are based upon deterministic equations.
 - ◇ **Aleatory** (think random). For example, the "fails to run" model for a diesel generator is based upon a Poisson process which is used to yield a probability of failure. The actual time that a diesel generator operates before failing is stochastic.
 - ◇ Each of these two parts has uncertainty associated with it. For example, in a thermal-hydraulic calculation, the temperature and pressure for a particular accident sequence spans a range. For the diesel generator, we may collect data on operation time to determine a failure rate, but we do not know the rate exactly (even if we collect a large amount of data). Further, the models we select for the deterministic or aleatory analysis are abstract representations of reality, thus indicating that we have model uncertainty.
 - These sources of uncertainty are called **epistemic**.
- When dealing with stochastic events, we do not know when the event will happen. This uncertainty is called **aleatory** uncertainty.
 - ◇ Aleatory models represent a random process; an example of this process would be the time until a light bulb burns out. Other examples are the time that a pump runs (until it fails) or the number of times a diesel generator starts (before a failure occurs).

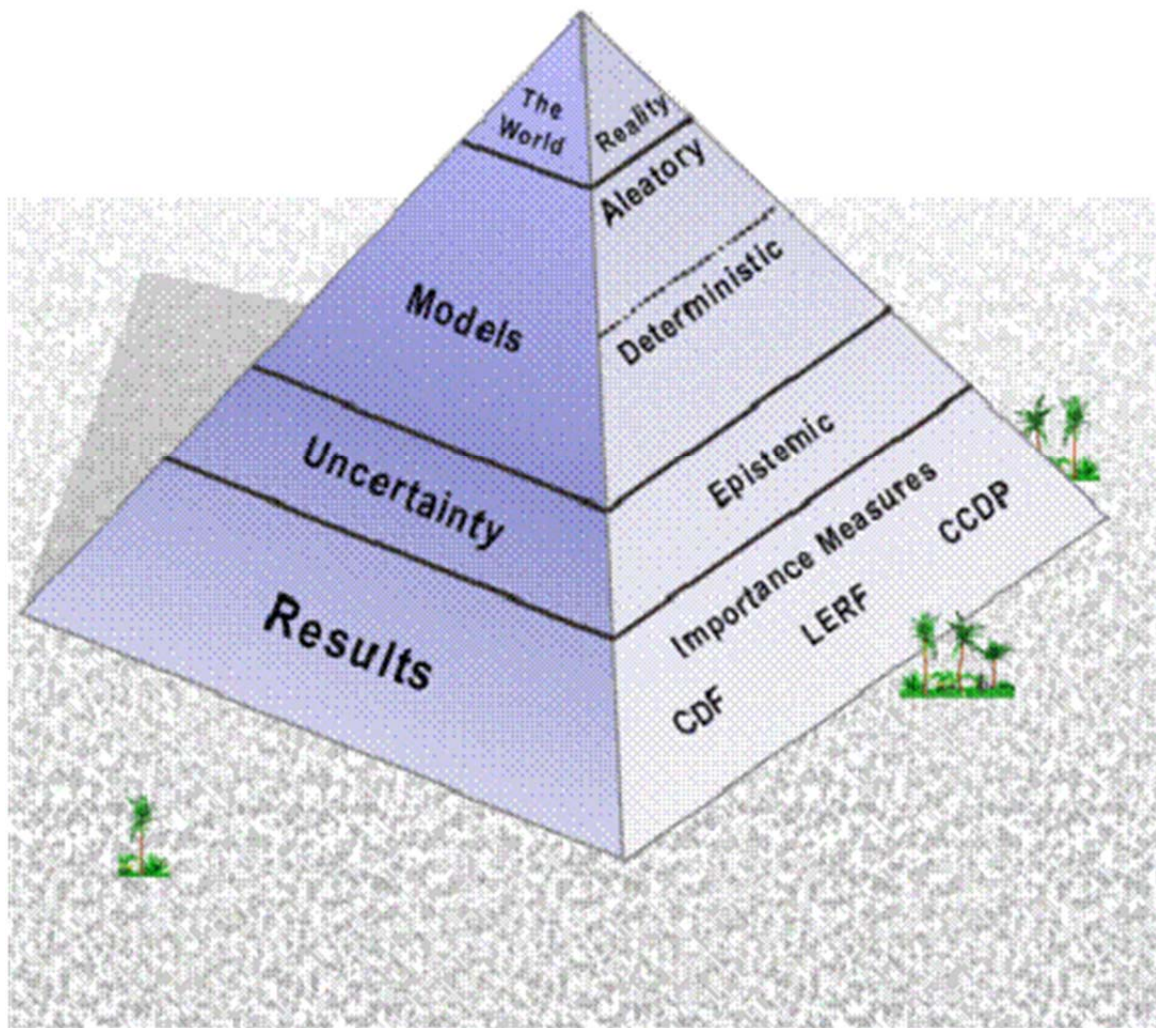

- ◊ In all cases, aleatory models have, as inputs, parameters characterizing key elements (or assumptions) about the model.
 - For example, when we talk about the “pump fails to run” aleatory model, a parameter of this model is typically a failure rate for “the pump to run.”
- In real problems, we are never given the exact failure rate of components. We generally know their failure rates only up to a certain degree, based on the amount of data available.
 - ◊ This “state of knowledge” uncertainty is referred to as **epistemic** uncertainty.
 - This type of epistemic uncertainty is frequently called “parameter uncertainty.”

- When someone indicates that they have done an uncertainty analysis in PRA, they generally mean that they only evaluated the epistemic parameter uncertainty for just the aleatory portion of the PRA.
- To evaluate the epistemic uncertainty, SAPHIRE provides two (closely related) Monte Carlo uncertainty analysis techniques:
 1. Simple Monte Carlo sampling
 - Repeatedly quantifies the system, event tree sequence, or project cut sets. Each basic event is sampled from its epistemic uncertainty distribution.
 - Generally requires more samples than Latin Hypercube sampling for the same degree of accuracy, but today's computers can handle thousands of iterations.
 2. Latin Hypercube sampling
 - A stratified sampling technique, with the basic event's epistemic distribution divided into equal probability subintervals.
 - Within each subinterval, SAPHIRE randomly samples and then "shuffles" the resulting values to ensure randomness.
 - May require fewer samples than simple Monte Carlo for similar accuracy; however, it may take longer to generate a random subinterval and subsequent shuffle than for a simple Monte Carlo sample.

Summary:

Computers and software are sufficiently fast that either uncertainty method is fine. Make sure that you check for convergence by varying the number of samples (e.g., 5,000; 7,000; 10,000) and comparing the answers at the end of each run.

The Rev. 8.15+ SPAR models contain both aleatory and epistemic uncertainty. Basic events are in the model that have "random" failure models (i.e., aleatory) such as fails-to-run and fails-to-start. For these models, the parameters that are uncertain have epistemic uncertainty distributions assigned to them.


10.2 Other Uncertainty Considerations

- Many steps that are taken during an event evaluation could introduce additional uncertainty into the overall results of the analysis.
 - ◊ The term “modeling uncertainty” represents the uncertainty directly associated with the PRA models (but not including the epistemic uncertainty). This uncertainty includes:
 - Limitations built into the SPAR models.
 - Potential information and interpretation deficiencies that arise during the accident event information gathering step.
- Performing the event evaluation requires several intermediate steps.
 - ◊ Interpret the circumstances regarding the operational event or decide on the situation for a hypothetical event.
 - ◊ Decide which inputs to the PRA model must be modified and how the inputs should be modified.
 - ◊ Modify the SPAR model and perform the evaluation using SAPHIRE/ECA.
 - ◊ Report and evaluate the newly generated results for the event analysis.
 - Each step above has the potential to introduce uncertainty into the event evaluation process.
- In general, a formal (mathematical) evaluation of the model uncertainty is not performed.
 - ◊ The review or “reality check” after an analysis helps to scope the potential model uncertainties that may be important for the particular analysis.

10.3 Steps in Performing an Epistemic Uncertainty Evaluation

- The type of event (either “initiating” or “condition”) is evaluated prior to performing an uncertainty analysis on the sequences.
- After the event has been evaluated, the ECA Workspace will perform an uncertainty analysis on the resulting cut sets.
 - ◊ The changed sequences had a change in either the initiating event or in basic events in the minimal cut sets.
 - ◊ These changed sequences are noted in the analysis results.

- To perform the uncertainty analysis, the analyst clicks the radio button specifying the type of uncertainty analysis sampling to be performed. (If no uncertainty analysis is to be performed, click the None radio button.)

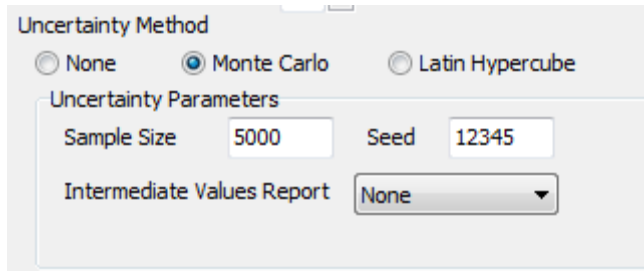

Uncertainty Method

☐ None ☒ Monte Carlo ☐ Latin Hypercube

Uncertainty Parameters

Sample Size: 5000 Seed: 12345

Intermediate Values Report: None

- Then, you will need to define the uncertainty options.
 - ◇ Choose either Latin Hypercube or Monte Carlo
 - ◇ The number of samples to be used must be specified.
 - A sample size of 5,000 (or more) is generally adequate.
 - ◇ The random number generator seed can be specified or left as zero.


10.4 Example Uncertainty Analysis

- To demonstrate the uncertainty analysis process and results, an initiating event evaluation will be performed using the Generic PWR model.
- A switchyard-related LOOP with no components failed was evaluated along with an uncertainty analysis.
- The LOOP initiator was selected (“switchyard” related).
 - ◇ It was assumed that no components were failed.
 - This calculation gives the CCDP given that a switchyard-related LOOP occurred.
 - ◇ The results of “processing” the analysis are shown.
 - The total CCDP is 3.400E-5. This value is a *point estimate*.
- Since the point estimate does not reflect the uncertainties in the basic events, we need to perform an uncertainty analysis.

- ◇ The results of the uncertainty analysis are shown for Monte Carlo, 5000 samples.
 - The mean value for the CCDP was found to be 3.642E-5.
 - The 95th percentile for the CCDP was found to be 1.482E-4.

CCDP Uncertainty Distribution

5%	Median	Point Estimate	Mean	95%	Seed	Sample Size	Method
1.053E-7	1.219E-5	3.400E-5	3.642E-5	1.482E-4	4321	5000	Monte Carlo

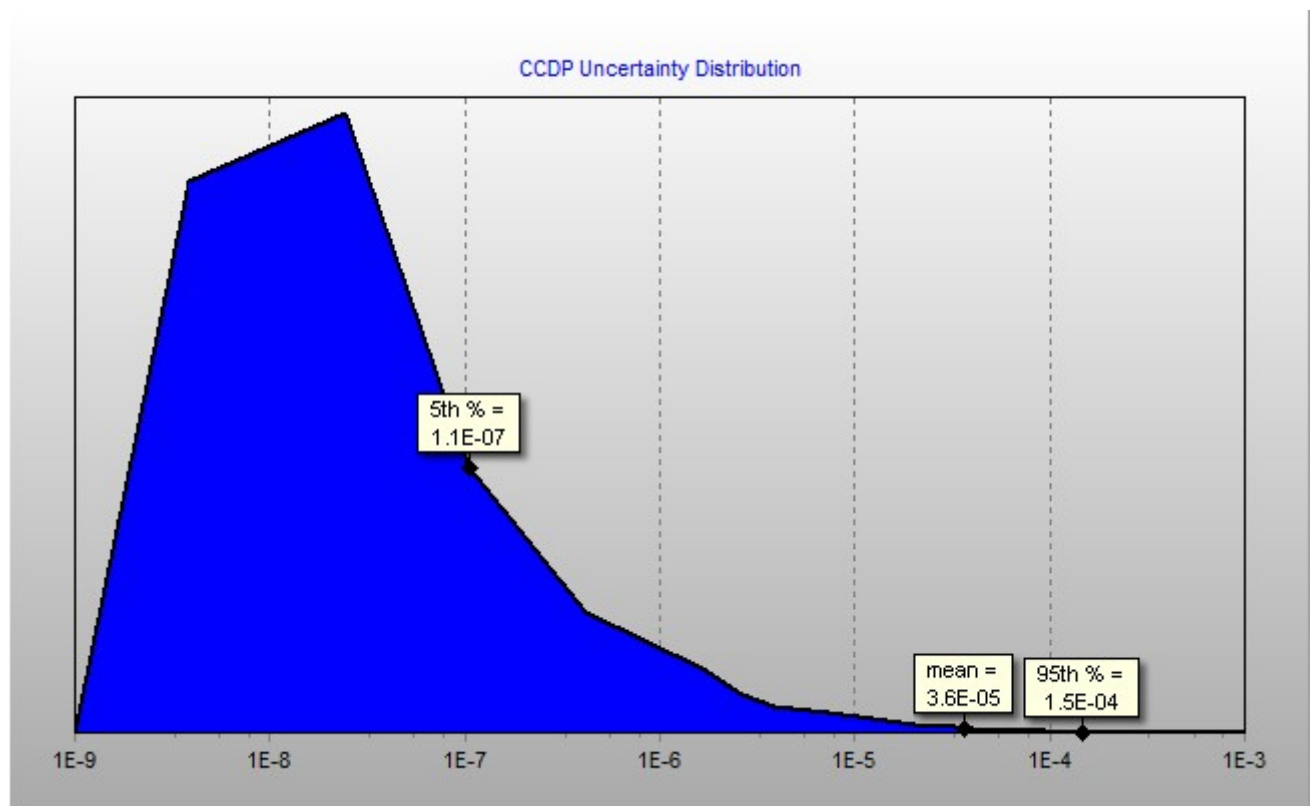

10.5 Workshop

11. EVENT EVALUATION CASE STUDIES

Section 11 contains event reports for two incidents that occurred at operating U.S. nuclear power plants. These incidents will be the focus of the case studies that will be evaluated and discussed. Checklists are provided to assist the reader in determining the important steps to follow in order to complete the event evaluations.

Learning Objectives

- Demonstrate proficiency with ECA Workspace by performing the exercises corresponding to the event reports in this section.

Section 11 Topics

- 11.1 Introduction
- 11.2 Case Study 1
- 11.3 Case Study 2

11.1 Introduction

Incidents at nuclear power plants occur at many different times and under a variety of situations. Even the most modern, well run plants may experience events that are precursors to core damage.

The U.S. Nuclear Regulatory Commission evaluates a variety of such events through activities such as its Accident Sequence Precursor program. In this program, a conditional core damage probability is calculated that represents the plant configuration observed during an initiating event situation or during the duration of an unplanned equipment outage. This calculation is called an “event evaluation.”

This section provides information about two incidents that happened at nuclear power plants. This information is provided by way of excerpts from the plant LER about the events. You are asked to review the reports in order to gain an understanding of what took place during the event. Then, with this knowledge, you will be asked to perform an event evaluation for the incident.

To assist in the evaluation, a simple checklist has been provided. This checklist is intended to cover the major items that need to be addressed during any event evaluation.

11.2 Case Study 1

CASE STUDY #1, LER FOR GENERIC PWR PLANT

Read the attached LER for the first case study. Using the checklist below, evaluate the event using the ECA Workspace, the Generic PWR SPAR model, and the supplied documentation.

#	Item	Result
1	Is the event an initiating event or condition assessment?	<div>Initiating <input type="checkbox"/></div> <div>Condition <input type="checkbox"/></div> <div>Both <input type="checkbox"/></div>
2	If the event is a condition assessment, what is the duration?	hours
3	If the event is an initiating event, is the initiator recoverable? (Note that the ECA Workspace will adjust the non-recovery probabilities for you automatically)	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>
4	Were any systems, structures, or components (SSCs) inoperable during the event?	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>
5	If the answer to Question 4 was yes, identify the SSCs by finding its associated basic event(s) from the PRA model. Only identify "independent failure" related events (e.g., no common-cause yet).	
6	For those basic events identified in Question 5, determine the SSC's non-recovery probability (if it is recoverable from the failure).	
7	Are there any basic events identified in Question 5 that have associated common-cause failure events?	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>
8	For each event had a yes answer to Question 7, determine the type of SSC failure. Options are: (a) Independent failures (b) Common-cause failures (c) Testing/Maintenance	

Refer to Section 6 for additional information.

#	Item	Result
9	List the common-cause basic events that were identified from Question 7. Note that since you are using the Rev. 8.15+ SPAR model, you <i>will not</i> need to adjust these events (they are automatically modified by the software).	
10	You will need to specify in the ECA Workspace how to modify each basic event identified in Question 8. From Question 8, if the SSC is an independent failure or testing/maintenance outage, set the event to a probability of 1.0. Otherwise, set it to TRUE.	
11	For those SSCs that were identified in Question 6 and do not have an associated common-cause event, set the SSCs to its non-recovery probability in the ECA Workspace.	
12	Process the analysis using the modifications identified in Questions 1 - 11. Record your results of the analysis.	

FACILITY NAME: Generic PWR

TITLE: 'A' Standby Diesel Generator Output Breaker Failure to Close

EVENT DATE: 09/16/93

LER #: REPORT DATE: 10/18/93

OTHER FACILITIES INVOLVED: None

OPERATING MODE: 1POWER LEVEL: 100%

THIS REPORT IS SUBMITTED PURSUANT TO THE REQUIREMENTS OF 10 CFR SECTION:
50.73(a)(2)(i)
50.73(a)(2)(v)

COMPONENT FAILURE DESCRIPTION:

CAUSE: SYSTEM: COMPONENT: MANUFACTURER:
REPORTABLE NPRDS: YES

SUPPLEMENTAL REPORT EXPECTED: No

ABSTRACT:

On September 16, 1993, the 'A' Standby Diesel Generator (SBDG) output breaker, 1A1, failed to close during the performance of the Loss of Offsite Power-Loss of Coolant Accident (LOOP-LOCA) surveillance test. The cause was an improper clearance between the breaker plunger and the switchgear stationary auxiliary switch mechanism on the Standby Transformer feeder breaker to essential bus 1AA02. This improper clearance disabled one of the closure permissives for 1A1.

The corrective actions included readjusting the gap between the breaker plunger and the stationary auxiliary switch to within the specifications intended by the breaker vendor and testing.

I.DESCRPTION OF EVENT:

On September 16, 1993, with the plant operating, the 'A' SBDG output breaker, 1A1, failed to close during the performance of the LOOP-LOCA surveillance test.

Troubleshooting conducted by the plant Electrical Maintenance and Systems Engineering groups pinpointed the source of the problem to the 7-8 contacts on the stationary auxiliary switch mechanism in the switchgear cubicle for the Standby Transformer feeder breaker to essential bus 1AA02. The stationary auxiliary switch is operated by a plunger on the breaker that causes the 'a' switch contacts to close when the breaker is closed and causes the 'b' contacts to close when the breaker is open. Contacts 7-8 are 'b' contacts and should have closed during the LOOP-LOCA test when AA20 opened to provide a signal to the logic that bus 1AA02 was disconnected from the Standby Transformer and that the 'B' SBDG output breaker could safely close on the bus. In situ testing of contacts 7-8 indicated that continuity existed between them but that they failed to pass sufficient current to energize one of the logic's relay coils. The switch was removed, its contacts were burnished, and the switch was reinstalled. When the LOOP-LOCA test was rerun on September 22, breaker 1A1 again failed to close. At that time it was discovered that, with breaker AA20 racked in and open, the breaker plunger

was depressing the stationary auxiliary switch operating rod approximately 3/16 inches. This caused enough rotation in the switch mechanism to cause contacts 7-8 to be partially open and maintain poor contact as identified during testing described above.

A review of plant records revealed that during the performance of periodic maintenance on breaker AA20 on **July 21, 1993**, a spacer had been added to raise the plunger. The addition of the spacer restored one of the breaker's dimensions to within the vendor's specifications, but caused the relationship between the breaker plunger and the auxiliary switch operating rod gap to fall outside acceptable limits. The breaker plunger was readjusted and the LOOP-LOCA test was successfully completed on **September 24**.

II. CAUSE OF THE EVENT

The cause of this event was procedural inadequacy. The maintenance manual for circuit breakers states, under Auxiliary Devices-Plunger Interlock, that the distance from the top of the plunger bolt to the bottom of the lifting rail should be 11-7/32 to 11-11/32 inches with the breaker closed. The manual also states that washers should be added or removed from the plunger as necessary to achieve this dimension. This dimension assures that the 'a' contacts on the auxiliary switch will close when the breaker is closed and also establishes uniformity between individual breakers to make them interchangeable. This maintenance procedure is based largely on other practices and it was this dimension that was being restored when the washer was added to the plunger on AA20 on July 21.

In addition, the maintenance manual for Metal Clad switchgear states that, with the breaker racked in and open, that the gap between the breaker plunger and the operating rod on the stationary auxiliary switch mechanism should be from 0 to 1/8 inches and that any adjustment in this dimension must be made on the auxiliary switch setting. This measurement is a final check to make sure that the plunger and auxiliary switch perform as intended. However, the auxiliary switch is pinned in place and is not adjustable. It was stated that removing this pin is inappropriate. Establishing this gap can only be accomplished by adding or removing washers from the plunger.

III. ANALYSIS OF EVENT

Two Technical Specification violations resulted from the inoperability of the 'A' SBDG output breaker for the period from July 21 to September 24. The period from July 21 to September 24 (when the plant was shutdown for a refueling outage) was longer than the seven day Limiting Condition for Operation allowed and was a violation of Technical Specification 3.5.G.1. The second violation (Technical Specification 3.9.D) occurred during a four day period (**July 31 through August 4**) with the 'B' SBDG also inoperable for maintenance.

In the event a Loss of Offsite Power event would have occurred between July 21, 1993 and September 24, the 'A' SBDG output breaker, 1A1 would have failed to close automatically on essential bus 1AA02. However, plant procedures would have directed control room operators to perform the steps necessary to allow breaker 1A1 to be closed manually from the control room.

A probabilistic risk assessment (PRA) of the core damage frequency (CDF) was performed for the period from July 21 when maintenance was performed on AA20 until September 24 when the plant was placed in cold shutdown for its 12th refueling outage. The analysis conservatively assumed that the control room operators would be unable to close the 'A' SBDG output breaker and determined that the instantaneous CDF for this period was $6.00\text{E-}05/\text{year}$. This was a 21-fold increase but was still below the Proposed Safety Goal CDF of $1.00\text{E-}04/\text{year}$.

The Safety Analysis Group also evaluated the plant shutdown risk for the period from September 24 to September 28 to determine the effect on the reactor core boiling frequency. This time frame includes a four day period when fuel was being moved out of the reactor vessel at the same time the 'B' Standby Diesel Generator was inoperable for maintenance. Again assuming no operator action to manually close breaker 1A1, the frequency of core boiling was increased 2% for the most limiting 24 hour period. This increase is considered minimal. A refueling accident, combined with a loss of offsite power event would have resulted in appropriate Reactor Building ventilation isolations. Manual operator action would have been necessary to ensure proper Standby Gas Treatment and Standby Filter Unit systems operation by restoring electrical power to essential busses. Throughout this period, offsite power sources were available.

IV. CORRECTIVE ACTIONS

1. The proper gap between the AA20 auxiliary switch operating rod and the breaker plunger was established on September 23 and the LOOP-LOCA surveillance test was successfully completed on September 24.
2. Plant procedures have been revised to address the need to establish the auxiliary switch - breaker plunger gap.
3. A review was completed on all of the stationary auxiliary contacts in the essential busses and RPT breakers to identify those contacts with functions important to plant safety. All such contacts were either tested or verified to have been tested since the last time the breaker plunger had been adjusted. No failures were identified.
4. Measurements were taken on all essential and nonessential 4160 volt switchgear to assess conformance to vendor acceptance criteria. In thirteen of the essential breakers, the gap fell outside the vendor's criteria. Of the 13, the stationary auxiliary contacts on three of these breakers perform no safety related or significant plant functions and were not reworked prior to plant startup. The remaining 10 were adjusted to within vendor specifications. If a breaker plunger was adjusted downward (spacers removed), its 'a' contacts were functionally tested after the adjustments were made.

5. Six non-essential 4160 volt breakers with functions important to plant operation were also adjusted to within specification and were functionally tested if spacers were removed.
6. Special Order 93-48 was issued due to the concerns over 4160 volt breakers. The Special Order requires the Electrical Maintenance Supervisor or his designee to authorize and witness any exchanges between 4160 volt breakers. Any exchange will be documented on a Corrective Maintenance Action Request (CMAR) describing the condition which necessitates the exchange and the serial numbers of the breakers involved.

11.3 Case Study 2

CASE STUDY #2, LER FOR GENERIC PWR SPAR MODEL

Read the attached LER for the second case study. Using the checklist below, evaluate the event using the ECA Workspace, the Generic SPAR model, and the supplied documentation.

#	Item	Result
1	Is the event an initiating event or condition assessment?	<div>Initiating <input type="checkbox"/></div> <div>Condition <input type="checkbox"/></div> <div>Both <input type="checkbox"/></div>
2	If the event is a condition assessment, what is the duration?	hours
3	If the event is an initiating event, is the initiator recoverable? (Note that the ECA Workspace will adjust the non-recovery probabilities for you automatically)	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>
4	Were any systems, structures, or components (SSCs) inoperable during the event.	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>
5	If the answer to Question 4 was yes, identify the SSCs by finding its associated basic event(s) from the PRA model. Only identify "independent failure" related events (e.g., no common-cause yet).	
6	For those basic events identified in Question 5, determine the SSC's non-recovery probability (if it is recoverable from the failure).	
7	Are there any basic events identified in Question 5 that have associated common-cause failure events?	<div>Yes <input type="checkbox"/></div> <div>No <input type="checkbox"/></div>

#	Item	Result
8	<p>For each event had a yes answer to Question 7, determine the type of SSC failure. Options are:</p> <ul style="list-style-type: none">(a) Independent failures(b) Common-cause failures(c) Testing/Maintenance <p>Refer to Section 6 for additional information.</p>	
9	<p>List the common-cause basic events that were identified from Question 7. Note that since you are using the Rev. 8.15+ SPAR model, you <i>will not</i> need to adjust these events (they are automatically modified by the software).</p>	
10	<p>You will need to specify to the ECA Workspace how to modify each basic event identified in Question 8. From Question 8, if the SSC is an independent failure or testing/maintenance outage, set the event to a probability of 1.0. Otherwise, set it to TRUE.</p>	
11	<p>For those SSCs that were identified in Question 6 and do not have an associated common-cause event, set the SSCs to its non-recovery probability in the ECA Workspace.</p>	
12	<p>Process the analysis using the modifications identified in Questions 1 - 11. Record your results of the analysis.</p>	

FACILITY NAME: Generic PWR

TITLE: Reactor Trips as a Result of a Switchyard Power Circuit Breaker Fault
and a Unit 2 Entry Into Limiting Condition for Operation (LCO) 3.0.3
When A Centrifugal Charging Pump Was Removed From Service

EVENT DATE: 12/31/92

LER #: REPORT DATE: 02/01/93

OTHER FACILITIES INVOLVED: Unit 2

OPERATING MODE: 1POWER LEVEL: 100

COMPONENT FAILURE DESCRIPTION:

CAUSE: SYSTEM: COMPONENT: MANUFACTURER:
REPORTABLE NPRDS: N

ABSTRACT:

On December 31, 1992, at approximately 2148 Eastern standard time (EST), with Units 1 and 2 in power operation at approximately 100 percent, both units received a reactor trip signal because of reactor coolant pump bus undervoltage. The reactor trips were followed by turbine trips. Undervoltage on the 4.16-kV shutdown boards initiated board load stripping, diesel generator (D/G) starts, and D/Gs tying onto their respective shutdown board. Electrical loads were appropriately sequenced back to the boards. Main feedwater isolated and auxiliary feedwater pumps started. With limited staffing in the Unit 1 main control room, recovery evolutions for Unit 1 resulted in isolation of centrifugal charging pump suction and removal of centrifugal charging pump from service. Unit 1 entered LCO 3.0.3 for approximately one minute until a suction flow path was reestablished. The cause of the event was an internal fault in a **switchyard** power circuit breaker resulting from inappropriate testing methodology, resulting in a loss of offsite power. Corrective actions include strengthening of switchyard controls and increasing minimum Operations control room staffing.

I. PLANT CONDITIONS

Units 1 and 2 were in power operation at approximately 100 percent power.

II. DESCRIPTION OF EVENT

A. Event

On December 31, 1992, at approximately 2148 Eastern standard time (EST), both units received a reactor trip signal because of reactor coolant pump bus undervoltage. The undervoltage condition resulted from an internal fault in a new switchyard power circuit breaker (PCB) (EIIS Code FK) that had been in service approximately 11 minutes. Before the event, switchyard crews were in the process of placing the PCB in service. The PCB (PCB 5058) was in the 500-kV switchyard to intertie transformer position. Primary protective relays applicable to the PCB had been disabled by opening the associated trip cutout switches to facilitate differential relay circuit phasing.

The reactor trips were followed by turbine trips. Undervoltage on the 4.16-kV shutdown (S/D) boards (EIIS Code EB) initiated diesel generator

(D/G) (EIIS Code EK) starts and loading onto their respective S/D boards. The S/D board loads were stripped and upon D/G loading, loads were appropriately sequenced back to the boards with the exception of the thermal barrier booster pumps (TBBPs), which did not restart. Main feedwater isolated and auxiliary feedwater (AFW) (EIIS Code BA) pumps started. Loss of power to a radiation monitor (EIIS Code IL) resulted in an auxiliary building isolation. The fault was cleared within 88 cycles, and offsite power to the start busses was restored. Following the trip the reactor coolant pumps (RCPS) transferred from the unit station service transformer (USST) to the common station service transformer (CSST) as designed; forced reactor coolant flow was maintained.

During the transient, Unit 2 recovery evolutions resulted in isolation of centrifugal charging pump (EIIS Code CB) suction and pump being removed from service. Unit 2 entered Limiting Condition for Operation (LCO) 3.0.3 for approximately one minute until a suction flow path was reestablished. Normal charging seal flow was not in-service during this time. Approximately 20 seconds into that minute, the TBBPs were manually started to provide RCP seal flow cooling.

B. Inoperable Structures, Components, or Systems That Contributed to the Event

The handswitches for the TBBPs of both units were in the A-Auto position (in accordance with procedure) instead of the AP-Auto position (in accordance with design). The TBBPs were shed following the **loss of offsite power** indication, as designed. However, as a result of the handswitch position, the TBBPs did not reload upon D/G loading.

C. Dates and Approximate Times of Major Occurrences

December 31, 1992 Following review and approval of the at 2137 EST switching order and testing methodology by the main control room (MCR) staff, PCB 5058 was placed in service to be followed by verification of phasing on the differential relay circuit. The primary trip cut-out switches were placed in the open position and provided no primary relay protection for PCB 5058 during this timeframe. Secondary delayed relay protection was available and did operate after approximately 88 cycles.

December 31, 1992 PCB 5058 faulted internally, resulting in breaker failure. From the annunciator printout, the first alarms to come in indicated oscillograph operation and opening of PCB 5074. The condenser circulating water pump motors tripped followed by alarms for overcurrent on Generator 1 exciter field, 161-kV supply voltage failure, station frequency excessive error, and undervoltage on the RCP bus.

Additional events during this first minute included:

- 1) Opening of the 500-kV switchyard PCBs and the intertie PCBs in the 161-kV switchyard.

- 2) Undervoltage on the 4.16-kV S/D boards resulted in the appropriate relays stripping the major equipment from the boards. This included the centrifugal charging pumps (CCPs) on both units, which subsequently resulted in letdown isolations.
- 3) Both units received a reactor trip signal because of RCP bus undervoltage. The reactor trips were followed by turbine trips and 161-kV bus voltage-failure alarms. Automatic transfer from USST to CSST was successful, and the 4.16-kV unit boards remained energized from offsite power. Undervoltage on the 4.16-kV S/D boards initiated transfer to the D/Gs. The D/Gs started; feeder breakers closed and energized their respective S/D boards.

Unit 2
at 2208 EST

Suction to the CCPs swapped over from the volume control tank (VCT) to the refueling water storage tank (RWST) because level in the VCT had decreased to 7 percent. At that time, the ASOS realized that letdown had been previously isolated. The ASOS directed that one CCP be stopped. Since the blackout relays were sealed in, the pump was placed in pull-to-lock (P-T-L).

Unit 2
at 2209 EST

Letdown was reestablished.

Unit 2
at 2211 EST

After the reactor operator (RO) and ASOS verified sufficient VCT level, the VCT outlet valves were opened. The operator then closed the RWST valves. The operator observed that the VCT outlet valves were traveling closed. The second CCP was stopped and letdown automatically isolated. With both CCPs not in service, LCO 3.0.3 was entered. Approximately 20 seconds after the second CCP was stopped, the shift operations supervisor (SOS) started the TBBPs. The Unit 1 TBBPs were then started after the Unit 2 TBBPs.

Unit 2
at 2212 EST

VCT valves were opened, the second CCP was started, and letdown was reestablished. The handswitches for both the VCT and RWST valves were either placed in or verified to be in AP-AUTO position. LCO 3.0.3 was exited.

Unit 2
at 2313 EST

The 4.16-kV S/D boards were returned to normal offsite power.

January 1, 1993
at 0011 EST

Unit 2 was stabilized in Mode 3.

D. Other Systems or Secondary Functions Affected

The low voltage condition resulted in the Units 1 and 2 condenser circulating water (CCW) pumps tripping. The loss of these pumps is not considered abnormal for this event. The unit boards sustained a voltage drop that would cause a drop in excitation voltage and result in a speed deviation trip or a power-factor deviation trip. CCW flow is necessary to maintain condenser vacuum and to provide an enable signal for steam dump.

E. Operator Actions

The operators promptly diagnosed the plant conditions and took actions necessary to stabilize the units in the hot standby condition (Mode 3).

Unit 2 MCR personnel (one ASOS and one RO) proceeded through the actions described by the emergency procedure. With only one RO, securing of the secondary side was delayed. The RO took manual control of the TDAFWP and reduced its speed to minimum. The MDAFWP LCVs were left in the auto position resulting in twice the AFW flow of that in Unit 1, resulting in a greater cooldown rate. With blowdown isolated, feedwater pumps tripped, main turbine tripped, and steam dumps not available, the effect of the higher AFW flow caused Unit 2 to cooldown to about 537 degrees F. The ASOS recognized that RCS boration was required if T sub avg was less than 540 degrees F and made the decision to leave the MDAFWP LCVs in auto and borate first. The ASOS and RO discussed which flow path was to be used. The normal boration path was chosen because it was considered to require less operator intervention and monitoring than the emergency path. The ASOS made the decision to borate through the blender and directed the RO to initiate 135 gallons of high concentration (20,000 parts per minute) boration at greater than 10 gpm. The ASOS did not read the procedure and believed that the procedure allowed boration through the path chosen. The procedure required boration through the emergency boration path. The normal boration path was allowed only if flow could not be achieved through the emergency boration path. The decision to borate through the normal rather than emergency path, as required by the procedure, set up the sequence of events ultimately leading to the loss of both CCPs and charging RCP seal injection.

The ASOS had noted early in the transient that the component cooling system (CCS) TBBPs did not automatically start after the D/Gs energized the S/D boards. The ASOS did not direct manual starting of the TBBPs at that time because he did not have the resources available to evaluate the impact on D/G loading.

At the time of the reactor trip, the undervoltage condition had resulted in load stripping of the 4.16-kV S/D boards. The load shedding tripped off the running CCP. With no CCPs running, a letdown isolation automatically occurred. After the ASOS initiated boration and manual control of the MDAFWP LCVs, an automatic swap over from the VCT to the RWST occurred as the level in the VCT reached 7 percent. At this time, the ASOS realized that letdown was isolated, and normal boration was only providing approximately 10 gpm makeup. After swap over, the ASOS directed the operator to stop the one CCP.

At this point, the RO recalled the RWST valves being closed and the VCT valves being open. The RO stated that as he looked away from the handswitches, he noticed green and red lights on the VCT valves, indicating the valves traveling closed. The RWST valves remained closed with green lights. With the RWST valve handswitches left in the A-Auto rather than the AP-Auto position, automatic transfer back to the RWST did not occur when the VCT valves traveled closed. The RO called out the condition to the ASOS. Not knowing whether the VCT valves were partly closed or almost fully closed, the RO prepared to stop the running A CCP. With concern for potential imminent failure of the CCP on loss of suction, the ASOS directed the RO to stop the A CCP. The RO held the pump handswitch in the STOP position (not in P-T-L). When told by the ASOS that the second CCP was being stopped, the SOS manually started the TBBPs approximately 20 seconds after the A CCP was stopped. The VCT outlet valves were reopened and remained open, the handswitch for the 2A-A CCP was released, and the pump restarted approximately one minute after being stopped. Letdown was reestablished and the system stabilized.

The normal feeder to the 4.16-kV S/D boards is designed to open when its undervoltage relays sense less than 80 percent voltage for more than 0.5 seconds. After the 6.9-kV S/D board voltage had decreased to less than 70 percent undervoltage, a D/G start signal was generated. The load shedding occurred as expected. After each D/G reached the appropriate speed and voltage, the breaker that connects each D/G to the S/D board closed, and the load sequencing timers started. Loads were then automatically reconnected for a nonaccident loading sequence. During this event, the load shed/load sequence logic functioned as designed on the four S/D boards, with the exception of the TBBPS.

The TBBPs failed to start following S/D board reloading. The SOS took manual action to restart the TBBPS. Further investigations into the failure to start revealed that the handswitches for the pumps had been placed in the A-Auto position in accordance with procedure. With the handswitch in this position, the pumps will not start upon actuation of the blackout relays. The handswitch position described by procedure was found to be incorrect relative to design.

During the time that the S/D boards were without power, a control power alarm was received on D/G 1A and a low lube oil pressure alarm was received on the four D/Gs. The low lube oil pressure alarm was expected for the event and was cleared. The control power alarm was reviewed and found to be the result of the test pushbutton being depressed or momentarily shorted. This condition was evaluated and no D/G operability concerns were identified.

NOTES

12. TEST REVIEW

Section 12 presents elements for review prior to the comprehensive event evaluation test. Alternatively, this section can be used to provide additional workshop material.

Learning Objectives

- Demonstrate a proficiency with the Event Evaluation course material by performing the exercises in this section.

Section 12 Topics

12.1 Example Problems

12.1 Example Problems

Problem 1. Assume that the minimal cut sets for core damage are:

$$CD = IE1 \cdot MOV-B + IE2 \cdot MOV-A \cdot DG-A + IE2 \cdot DG-B$$

where “.” indicates a logical AND operation while “+” indicates a logical OR operation.

a. If the component represented by MOV-B is failed (i.e., a TRUE house), what are the new minimal cut sets for core damage?

b. Calculate the conditional core damage probability (CCDP) given that the initiating event IE2 occurred while nothing was failed. Assume the following probabilities:

$$P(MOV-A) = P(MOV-B) = P(DG-A) = P(DG-B) = 0.01.$$

Problem 2. An LER is given to you by a coworker who asks you to perform an event assessment for the event. The LER reads as follows:

Facility: Plant XYZ (Generic PWR)	Notification: 6/10/2000	Event #: 21343
Emergency Class: Not applicable 10 CFR Section:ARPS 50.72(b) (2) (ii)		Notification: G.W. Operator
Unit 2: Reactor critical	100% power initially	0% power currently
<p>DEGRADATION OF AFW CONDENSATE STORAGE TANK</p> <p>During surveillance testing of the AFW, it was found that the AFW Condensate Storage Tank was valved shut (and locked) preventing its operation. Investigations indicated that this tank was inoperable since the last AFW maintenance 4 days ago.</p>		

- a. In the Generic PWR SPAR model, what is the name(s) of the basic event(s) that need to be adjusted in order to map the LER into the PRA?
- b. Using the ECA Workspace, map the LER event into the model. Print out a hardcopy of the analysis report. Record the overall results below.

$$\text{Importance}_{\text{event}} = \frac{\text{Importance}_{\text{event}}}{\text{Importance}_{\text{event}} + \text{Importance}_{\text{event}}}$$

CCDP = _____

$$\text{CDP} =$$

NOTES

Appendix A

Thoughts on Calculating CCDPs

The calculation of an operational risk measure attempts to create a risk profile, over time, conditional upon the component outages and plant initiating events that actually occurred during the period of interest. The conditional core damage probability (CCDP) is believed to be the best measure as a basis for this risk profile since it has many desirable features. But, what is *not* being calculated for the risk profile is the probability that severe core damage *did* happen. If we look at the operation during the last 12 months for any nuclear power plant in the U.S. and ask “what is the probability that severe core damage did happen,” the resulting probability is zero. While a zero probability for severe core damage is of great interest for the plant owners and operators, this particular probability question in itself is of little interest. Instead, the risk profile that deserves attention asks the question:

What could happen (i.e., what is the probability of core damage) if the conditions and events that existed over the duration of interest were realized at a later time?

Thus, the CCDP that is part of the risk profile measures the likelihood of core damage conditional upon the plant configuration and operating status at a point in time during the duration of interest. In addition, the conditionality that is imposed only reflects impacts on the measure of interest (e.g., core damage). Such impacts include the scenarios that have been discussed (e.g., a component outage or the occurrence of an initiating event). Situations where a component *operates* are not factored into the CCDP calculation. The fact that a particular component operated at a point in time is not important to the calculation. What is important is the question concerning the probability that the operating component *could* have failed. At first glance it may appear that the CCDP calculation is performed using the “relative frequency” statistical framework since the notion of a repeatable plant configuration is implied (i.e., if the plant were in this configuration 100 times, how many times would the operating component fail?). But, the CCDP calculation is still performed using the subjective (or Bayesian) framework that forms the foundation of modern PRAs. Nonetheless, the notion of a repeatable configuration may help the reader conceptualize the philosophy behind operational risk profile calculations.

To illustrate the philosophy backing the CCDP calculation, a non-nuclear power plant example will be utilized. To motivate this example, assume that an audience will see a particular magic show. In this show, the magician performs a special magic trick, using a length of rope, that incurs great risk and the potential for death. This trick is performed only once a month, every month of the year. Unfortunately, the type of rope used by the magician varies from one performance to another, depending on the available rope supply. It is known, from collecting rope usage data, that on any given performance, the probability of one type of rope being used during the performance is:

$$P(\text{best rope} \mid \text{performance}) = 0.5$$

$$P(\text{good rope} \mid \text{performance}) = 0.4$$

$$P(\text{bad rope} \mid \text{performance}) = 0.1$$

Further, it has been estimated that the probability of the magician dying during the performance varies from 0.1 to 0.001, depending on the type of rope that is used. Specifically, the probability of death is:

$$P(\text{death} \mid \text{best rope is used}) = 0.001$$

$$P(\text{death} \mid \text{good rope is used}) = 0.01$$

$$P(\text{death} \mid \text{bad rope is used}) = 0.1$$

The magician insists that “the show must go on” irrelevant of what type of rope is available for a particular performance. Knowing this, one could estimate the probability of death for a given, upcoming performance by the equation:

$$P(\text{death} \mid \text{performance}) = \sum P(\text{death} \mid \text{rope type X is used}) \times P(\text{rope type X is used} \mid \text{performance})$$

Evaluating this expression for the three rope types yields:

$$\begin{aligned} P(\text{death} \mid \text{performance}) &= [0.001 \times 0.5] + [0.01 \times 0.4] + [0.1 \times 0.1] \\ &= 0.0005 + 0.004 + 0.01 = 0.0145 \end{aligned}$$

where it can be seen that using the “bad” rope incurs the greatest amount of risk. Using the bad rope gives a probability of death more than two times that of the good rope and 20 times that of the best rope. While this risk calculation is adequate to determine the risk differences between using the three types of rope, it does not indicate what the risk was for a particular pattern of performances (say over the last 12 months). Instead, what is needed to determine the risk over a specified period of time is a risk profile calculation.

To perform this risk profile calculation, the actual rope type used for each of the last 12 shows is needed and are shown below.

Show	1	2	3	4	5	6	7	8	9	10	11	12
Type	good	best	best	best	Good	bad	best	good	best	best	good	best

From the previous calculation, the probability of death, given usage of a particular type of rope, is known for each rope type. These probabilities are: $P(\text{death} \mid \text{best rope}) = 0.001$, $P(\text{death} \mid \text{good rope}) = 0.01$, and $P(\text{death} \mid \text{bad rope}) = 0.1$. Plotting these probabilities for each performance over the last 12 months gives Figure A-1. If these conditional probabilities are summed over the last twelve performances, a cumulative probability risk profile is constructed. An example of a cumulative risk profile is shown in Figure A-2.

The plots shown in Figures A-1 and A-2 are representations of risk profiles. These risk profiles demonstrate the probability of death that was experienced by the magician for the performances over the last year. The calculation for similar plots will be discussed relevant to the operation of nuclear power plants in the following two sections. First, the issue of component outages, and their impact on the risk profile, is presented. Second, the concern of initiating events and complications to the risk profile calculation is addressed. One important difference between the magician example risk profile and that of an operating nuclear power plant is that the ordinal axis consists of time and is continuous rather than the discrete case (i.e., per performance) above.

The probability that the magician died over the last 12 performances is zero since the magician successfully completed the last performance. But, based upon the calculated risk profiles that are displayed in Figures A-1 and A-2, we can state that, given the type of ropes used and the number of performances over the year, the probability of death during a performance is about 0.147. As will be demonstrated later, similar statements can be made about the probability of experiencing damage to a nuclear power plant reactor during a component outage or the occurrence of an initiating event.

Figure A-1. Magician's probability of death risk profile.



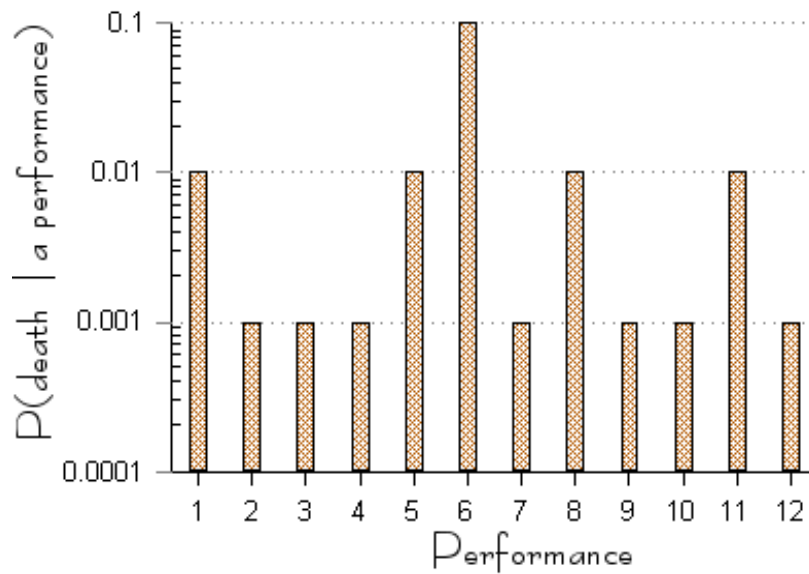


Figure A-2. Magician's cumulative probability of death risk profile.

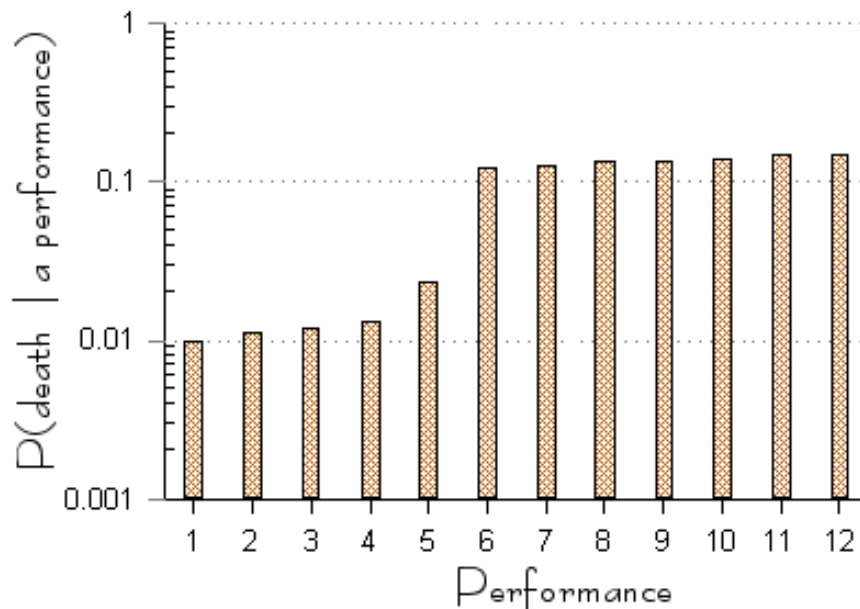

Risk Assessment in Event Evaluation Workbook

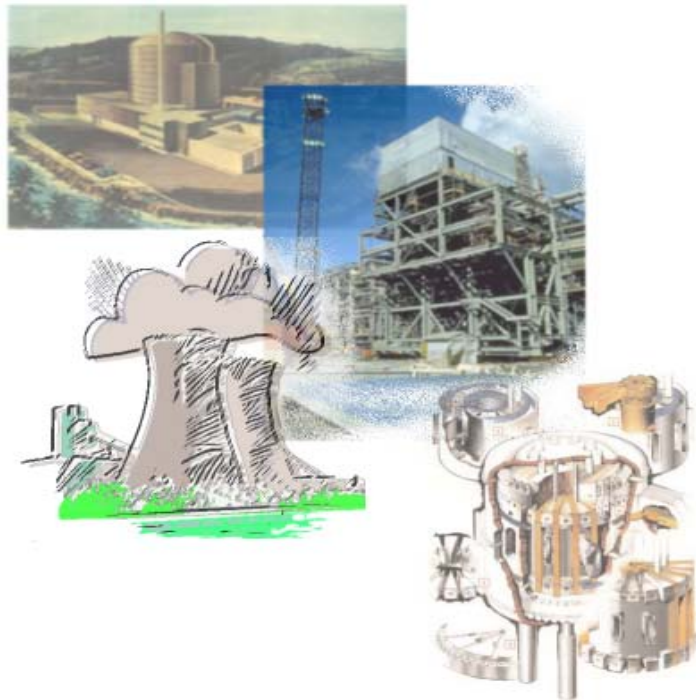

**Curtis Smith
Michael Calley
James Knudsen**

Idaho National Laboratory

Spring 2016



NOTICE

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product or process disclosed in this report, or represents that its use by such third party would not infringe privately owned rights. The views expressed in this report are not necessarily those of the U.S. Nuclear Regulatory Commission.

CONTENTS

<u>[1]</u>	<u>INTRODUCTION</u>	<u>1</u>
<u>[2]</u>	<u>RISK MEASURES IN EVENT EVALUATIONS</u>	<u>3</u>
<u>[3]</u>	<u>INITIATING EVENT ASSESSMENT</u>	<u>6</u>
<u>[4]</u>	<u>CONDITION ASSESSMENT</u>	<u>8</u>
<u>[5]</u>	<u>EVENT EVALUATION AND SAPHIRE</u>	<u>10</u>
<u>[6]</u>	<u>TREATMENT OF COMMON-CAUSE EVENTS</u>	<u>12</u>
<u>[7]</u>	<u>TREATMENT OF RECOVERY EVENTS</u>	<u>15</u>
<u>[8]</u>	<u>INITIATOR-TYPE EVENTS USING ECA</u>	<u>17</u>
<u>[9]</u>	<u>CONDITION ASSESSMENT USING ECA</u>	<u>20</u>
<u>[10]</u>	<u>CONSIDERATIONS OF UNCERTAINTY</u>	<u>22</u>

NOTES

1 INTRODUCTION

Section 1 contains an introduction to the Risk Assessment in Event Evaluation course workbook

This Risk Assessment in Event Evaluations course workbook accompanies the training course manual. The workbook provides instructions for modeling exercises that will provide students with hands-on experience using SAPHIRE Workspace features. The workbook provides information for the workshop problems, describes the exercises to perform, and provides the results that should be achieved during the exercises.

The Risk Assessment in Event Evaluation training course manual should be used to provide additional instructions as needed to perform the exercises.

The workshop exercises will help enforce the concepts discussed in the training manual. A diagram of a simplified version of a reactor and containment cooling system is shown in Figure 1. This simplified system will be evaluated in later workshop problems along with a more detailed PRA model.

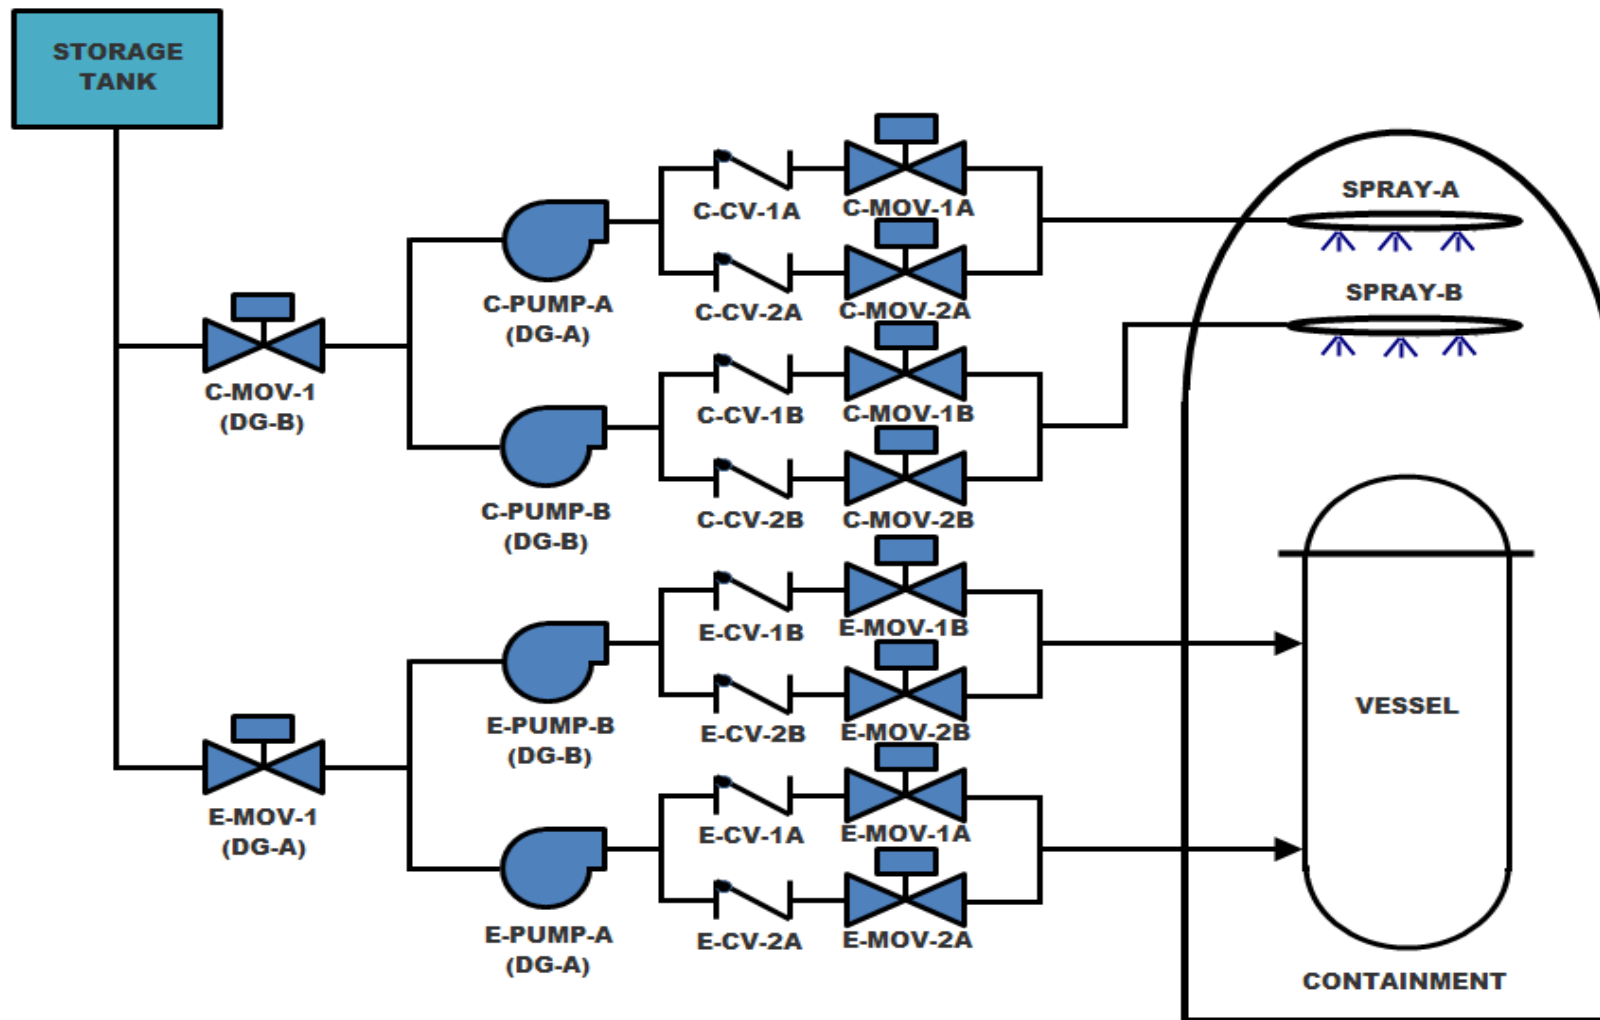


Figure 1. System diagram of the reactor and containment cooling systems for some workshop exercises. Note that electrical support system dependencies are shown in brackets () below the respective components.

| 2 | Risk Measures in Event Evaluations

Workshop Objectives

The Risk Measures in Event Evaluations workshop accompanies Sections 1 and 2 in the training manual. The workshop objective is to familiarize the analyst with calculating the different risk measures.

2-1 Assuming that our core damage can be modeled by the Boolean equation

$$CD = IE \cdot (A \cdot B + C \cdot B + D)$$

what is the CDP given that $P(IE) = 0.01$, $P(A) = 0.01$, $P(B) = 0.2$, $P(C) = 0.015$ and $P(D) = 0.003$?

2-2 Using the CD equation and probabilities from 2-1, what is the CCDP given that event C is failed (i.e., a TRUE house event)?

2-3 Using the CD equation and probabilities from 2-1

(a) What is the CCDP given that event B is failed (i.e., a TRUE house event)?

(b) What is the Importance_{event} for this event?

2-4 Assuming that the increase in the core damage frequency for an event at a plant is $\lambda = 2\text{E-}4/\text{yr}$, complete the table below.

Case	Duration	Importance _{event} = CCDP - CDP	SDP Color
1	(1/1000) year		
2	(1/100) year		
3	(1/10) year		
4	(1/2) year		
5	1 year		
6	20 years		

| 3 |

Initiating Event Assessment

Workshop Objectives

The Initiating Event Assessment workshop accompanies Section 3 in the training manual. The workshop objective is to give the analyst hands-on application to perform a simple initiating event assessment.

3-1 Assume that our core damage cut sets are:

$$CD = IE1 \cdot A \cdot B + IE1 \cdot B \cdot C + IE2 \cdot A + IE2 \cdot C \cdot D$$

Along with the following probabilities:

$$P(A) = 0.001$$

$$P(B) = 0.05$$

$$P(C) = 0.01$$

$$P(D) = 0.02$$

$$\lambda_{IE1} = \lambda_{IE2} = 0.01/\text{yr}$$

Answer the following four questions.

(a) What is the CCDP given that initiator IE2 occurs (and is not recoverable)?

- (b) What is the CCDP given that initiator IE1 occurs and has a nonrecovery probability of 0.1?

- (c) What is the CCDP given that initiator IE1 occurs (and has a nonrecovery probability of 0.1) while component B is inoperable?

- (d) What is the CCDP given that initiator IE1 occurs (and is not recoverable) while component A is inoperable?

| 4 | Condition Assessment

Workshop Objectives

The Condition Assessment workshop accompanies Section 4 in the training manual. The workshop objective is to give the analyst hands-on application to perform a simple condition assessment.

- 4-1 Assume that the rate of small LOCA is 1×10^{-4} /hr. A condition arose where an AFW component was inoperable for 10 hrs. For this condition, what is the probability of experiencing a small LOCA during a 10 hr interval?
- 4-2 For Question 4-1, it was found that the AFW component was actually inoperable for 100 hrs. Using the λT approximation, what is the probability of experiencing a small LOCA during this interval? Is the λT approximation valid for this case?

4-3 Assume that our core damage cut sets are:

$$CD = IE1 \cdot A \cdot B + IE1 \cdot B \cdot C + IE2 \cdot A + IE2 \cdot C \cdot D$$

and the following basic event probabilities and initiating event frequencies;

$$P(A) = 0.001 \quad P(B) = 0.05 \quad P(C) = 0.01 \quad P(D) = 0.02$$

$$f(IE1) = 0.01/\text{hr} \quad f(IE2) = 0.0001/\text{hr}$$

- (a) What is the CCDP given that basic event A was found to be failed (assume the duration of failure to be 100 hrs and the component was not recoverable)?

- (b) What is the CDP (for the 100 hr duration) given that all basic events are in their nominal state?

- (c) What is the Importance_{event} given that basic event A was found to be failed (assume the duration of failure to be 100 hrs and the component was not recoverable)?

| 5 | Event Evaluation and SAPHIRE

Workshop Objectives

The Event Evaluation and SAPHIRE workshop accompanies Section 5 in the training manual. The workshop objectives are to practice creating a change set to evaluate a hypothetical event using the Generic PWR SPAR Model.

Workshop Instructions

- 5-1 Using SAPHIRE and the Generic PWR SPAR model, perform a condition assessment assuming that train A of the high pressure injection (HPI) pump was unavailable for 876 hours ($1/10^{\text{th}}$ of a yr). Calculate the Importance_{event} measure.
- 1) Create a change set called HPI-MDPA-FS
 - 2) Drag and drop the basic event HPI-MDP-FS-1A into the change set
 - 3) Change is failure model to TRUE (guaranteed to fail) don't worry about CCF or potential recovery.
 - 4) Apply change set and solve all event trees

5-2 Using SAPHIRE and the Generic PWR SPAR model, assume main feedwater tripped and was not recoverable (IE-LOMFw). No other components are failed. Make a change set and adjust the initiators to their appropriate values. What is the CCDP?


- 1) Create a change set called LOMFW
- 2) Drag and drop the initiating events into the change set
- 3) Change the failure model to TRUE (guaranteed to fail) for the IE-LOMFw and set the other initiating events to FALSE.
- 4) Apply change set and solve all event trees

| 6 | Treatment of Common-Cause Events

Workshop Objectives

The Treatment of Common Cause-Events workshop accompanies Section 6 in the training manual. The workshop objectives are to practice calculating the common cause failure probability of a multi-train system and then calculate the new conditional probability of this common cause basic event based on the different conditions.

- 6-1 For the LPI pump trains shown, draw a fault tree modeling failure (failure to start, only) of the pump trains as the top event. Include common cause failure as a basic event (called LPI-MDP-CF). All pumps have to fail in order to fail the system.

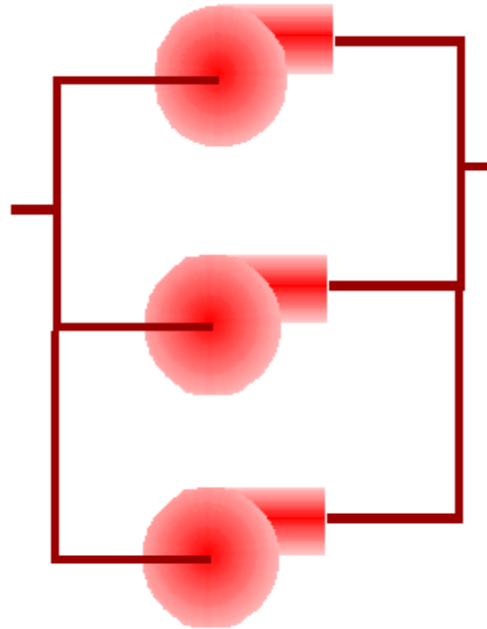

LPI Motor Driven Pumps

- 6-2 For the fault tree drawn in Question 6-1, calculate the following common cause failure probabilities (i.e., basic event LPI-MDP-CF) for the situations listed below.

Assume that the total failure probability for the pump is $P(\text{LPI-MDP}) = 0.002$. Also, assume that $\alpha_1 = 0.95$, $\alpha_2 = 0.04$, $\alpha_3 = ?$. Use the **Staggered** testing scheme when calculating the CCF event probability. Calculate the CCF probability the same as would be calculated within SAPHIRE.

$$Q_k^{(m)} = \frac{1}{\binom{m-1}{k-1}} \alpha_k Q_t$$

Make sure to fill out the notation in the "Notation" column for those that are left blank.

Situation	P(LPI-MDP-CF)
Nominal (nothing failed)	
Event where one pump is inoperable due to maintenance activities	
Event where one pump is inoperable due to failure with CCF potential	
Event where one pump is inoperable due to independent failure	

| 7 | Treatment of Recovery Events

Workshop Objectives

The Treatment of Recovery Events workshop accompanies Section 7 in the training manual. The workshop objectives are to calculate nonrecovery probabilities based on the equations and discussions from Section 7.

7-1 What is the probability of not recovering a diesel in 30 minutes, if two diesels are failed?

7-2 What is the probability of not recovering one of two failed diesels in 60 minutes, given there was no recovery in 30 minutes?

7-3 What is the nonrecovery probability (within two hours of the LOOP) of IE LOOP that would be used for a plant-centered loss of offsite power in the Generic PWR SPAR model?

| 8 |

Initiator-Type Events using ECA

Workshop Objectives

The Initiator type event workshop accompanies Section 8 in the training manual. The workshop objective is to perform an initiating event type assessment using the Events and Conditions Assessment (ECA) workspace.

- 8-1 Repeat the example event analysis assuming **both** LPI pumps were failed (Grid Related Loss of Offsite Power).
- (a) What is the resulting CCDP (truncation of $1.0E-11$)?
 - (b) Which component basic event has the highest risk increase ratio?
 - (c) What component or system will most decrease the probability of core damage if it could be made to operate perfectly?

- 8-2 Following a plant transient at the Generic PWR, the discharge check valve 098 for SI pump train 1A (HPI-CKV-CC-098) (in the high pressure injection, or “HPI” system) fails to open. Assuming that the check valve failure cannot be recovered, answer the following questions.
- (a) Using a truncation of $1E-11$, what is the resulting CCDP?
 - (b) What is the dominant core damage sequence for the CCDP?
 - (c) What is the failure probability for the basic event HPI-CKV-CF-0989 (check valve common-cause failure) for this event evaluation? What is its nominal value?

8-3 Evaluate a plant-centered loss of offsite power (LOOPPC) given train A of the high pressure injection system failed to start (HPI-MDP-FS-1A). Select the correct basic events and make the proper adjustments.

(a) What is the dominant station blackout (SBO) sequence for the event?

(b) What is the dominant cut set in this sequence?

(c) What is the percent contribution for the dominant cut set with respect to the *overall* (all sequences) CCDP?

| 9 |

Condition Assessment using ECA

Workshop Objectives

The Condition Assessment workshop accompanies Section 9 in the training manual. The workshop objective is to perform condition assessment using the Events and Conditions Assessment (ECA) workspace.

9-1 Repeat the analysis from section 9.4 with only Diesel Generator in division 1B ac power (Diesel Generator B) failed for 100 hours.

(a) What is the event importance measure?

(b) Are failures of the two diesels equally important at the Generic PWR plant?

9-2 Repeat the analysis from section 9.4 with both diesels failed (Diesel Generator A and B) for 100 hours.

(a) What is the resulting CCDP and event importance?

(b) What is the most dominant cut set from the most dominant sequence?

9-3 Repeat the analysis performed for the event described in Section 9.4 except assume that diesel generator A was out due to scheduled maintenance. Assume that the maintenance outage last 10 days. What is the resulting Importance_{event}?

| 10 |

Considerations of Uncertainty

Workshop Objectives

The Uncertainty workshop accompanies Section 10 in the training manual. The workshop objectives are to perform an uncertainty analysis on an event assessment (initiating or condition).

10-1 Perform an initiating event assessment. Assume that a general reactor trip occurred (i.e., transient) with no components failed. Run this analysis and answer the following questions.

(a) What is the point estimate for the CCDP measure?

(b) Run an uncertainty analysis (on all sequences) using 100 samples and a seed of 4321 (Monte Carlo). What is the mean value and 95th for the CCDP?

Mean = _____

95th = _____

- (c) Run an uncertainty analysis (on all sequences) using 1,000 samples and a seed of 4321 (Monte Carlo). What is the mean value and 95th for the CCDP?

Mean = _____

95th = _____