

INL/EXT-21-63646

**MEASURED THERMAL AND
FAST NEUTRON FLUENCE
RATES ATR CYCLES 169A**

10/30/20 thru 4/23/21

L. D. Smith and M. A. Reichenberger



July, 2021

The information contained in this document has not
been reviewed/approved by INL for unrestricted
dissemination, and no further distribution will be made
without customer direction/approval.

MEASURED THERMAL AND FAST NEUTRON FLUENCE RATES
ATR CYCLE 169A
10/30/20 thru 4/23/21

L. D. Smith and M. A. Reichenberger

This report contains the thermal (2200 m/s) and fast ($E > 1\text{MeV}$) neutron fluence rate data for ATR Cycle 169A which were measured by the Radiation Measurements Laboratory (RML) as requested by the Power Reactor Programs (ATR Experiments) Radiation Measurements Work Order.

This report contains fluence rate values corresponding to the particular elevations (relative to the 80-ft. core elevation) where the measurements were taken. The data in this report consists of (1) a table of the ATR power history and distribution, (2) a hard copy listing of all thermal and fast neutron fluence rates, (3) plots of both the thermal and fast neutron fluence rates, and (4) an optical record (compact disk) containing a listing of the thermal and the fast neutron fluence rates, their assigned elevations and proper header identification of all monitor positions contained herein.

The fluence rates reported are for the average power levels given in the table of power history and distribution.

No neutron monitors were located in the N-2 position during this cycle.

All "SR" holder monitor wires for this cycle are 55 inches long. This length allows measurements from 24.73 inches above core midplane to 25.25 inches below core midplane. The distance from the end of the wires to the first count position was 4.25 inches for all wires counted from this cycle.

During the irradiation of Cycle 152A, the RML performed additional flux measurements to assess core reconfiguration issues. Measurements using cadmium covered as well as bare neutron monitors in the Southwest, Southeast, and H positions of the Center lobe were performed to determine the division in neutron energy between epithermal and thermal neutrons. This is defined as the resonance correction defined in this report. It is used to quantify both thermal and fast neutron flux. For more information please refer to letter, "RADIATION MEASUREMENTS LABORATORY MEASUREMENTS OF IN CORE ATR PHYSICS TESTING DURING CYCLE 152A" dated January 24, 2013, to Casey Stengel from C. C. Jensen. The measured values documented in RML Procedure, "ACMM-3600, Flux Monitoring," will be used indefinitely until further measurements supersede the current values.

DEFINITIONS OF REPORTED INFORMATION

ON PRINTED PAGES

1. **CYCLE:** The identification code given to a specific period of operation of the ATR for which the data in this report applies.
2. **POSITION:** The identification code given to a specific location in the ATR core area where neutron monitors were located and for which the data associated with the code apply. The letter code identifies the lobe and the number code identifies a monitor position.
3. **MONITOR ID:** The identification code given to a specific neutron monitor holder. The code is stamped on the holder. The letter code identifies the type of holder and the number is unique to allow tracking of the neutron monitors and their data.
4. **EFPD:** The acronym for, "Effective Full Power Days" which is the effective number of days the ATR operated at the average total core power level of the cycle. This value is obtained from the ATR power history and distribution.
5. **AVERAGE MW:** The average power level (in megawatts) at which the ATR lobe operated during the cycle. The values used for NW, NE, C, SW, and SE lobes are obtained from the ATR power history and distribution. The values used for the other lobes and core positions are determined as follows:

$$\begin{aligned}N &= (NE + NW + C)/3 \\E &= (NE + SE + C)/3 \\S &= (SE + SW + C)/3 \\W &= (NW + SW + C)/3\end{aligned}$$

$$\begin{aligned}A1 \text{ through } A8 &= C \\A9 &= NE \\A10 &= SE \\A11 &= SW \\A12 &= NW\end{aligned}$$

$$\begin{aligned}B1 \text{ or } B2 &= NE \\B3 \text{ or } B4 &= SE \\B5 \text{ or } B6 &= SW \\B7 \text{ or } B8 &= NW\end{aligned}$$

$$\begin{aligned}I21 &= NE \\I22 &= SE \\I23 &= SW \\I24 &= NW\end{aligned}$$

$$\begin{aligned}B9 &= N \\B10 &= E \\B11 &= S \\B12 &= W\end{aligned}$$

6. **DATE:** The calendar dates corresponding to the outage and operating time of the cycle. These dates include the forced outage time associated with the cycle as well as the operating time.

7. **ELEVATION:** The vertical position associated with the neutron fluence rate measurement value relative to the 80 ft. elevation of the ATR core. The elevation values are in inches and negative values are below the 80 ft. elevation (commonly referred to as centerline). The elevation values are established reference elevation points specified as follows:

<u>Holder Type</u>	<u>Reference Elevation</u>	<u>Drawing Numbers</u>
H	77.948 ft.	424852
SR	77.768 ft.	417424
EPRI	83.260 ft.	601418
AGR-3/4	77.906 ft.	602691

Using the dimensions of the monitor holders, the location of the monitor wire in the holder, the length of the wire and the distance between the measurements along the wire an elevation value for each fluence rate value is determined. An evaluation of the elevation tolerances is listed as follows:

	<u>SR</u> <u>Holders</u>	<u>H</u> <u>Holders</u>
Holder Fabrication	± 0.11 inch	± 0.11 inch
Cutting the Monitor Wire to Length	± 0.10 inch	± 0.10 inch
Wire Alignment in the Holder	± 0.13 inch	± 0.06 inch
Mounting the Wire to the Scanner	± 0.13 inch	± 0.13 inch
Scanning Control	± 0.01 inch	± 0.01 inch
Scanner Home Positioning	± 0.06 inch	± 0.06 inch
Stackup of the Safety Rod Components (estimated)	± 0.33 inch*	
Position of the Safety Rod Relative to 80 ft. (core centerline) during Operation	± 0.75 inch**	
95% Confidence Bound	± 0.78 inch	± 0.19 inch
Maximum Error	± 1.53 inch	± 0.38 inch

These elevation tolerances include only what are considered to be random errors. Systematic errors or biases may also occur due to information input. However, procedural controls are used to minimize this information input error.

*This estimate will be revised after an actual measurement is made.

**This estimate does not include variations due to thermal and hydraulic effects.

8. "THERMAL": The equivalent 2200 m/s (0.025 eV) neutron fluence rate assuming a Maxwellian distribution for the thermalized neutrons at 20.44C. The fluence rate is determined from the Co-59(n, γ)Co-60 reaction rate assuming a 37 barn 2200 m/s cross section for the reaction. Corrections for the epithermal reaction rate are made based on cadmium ratio measurements at each position of the fluence rate measurement. All fluence rate values are in units of neutrons per sqcm per second.
9. "FAST": The equivalent >1 MeV fission neutron energy fluence rate assuming a pure U-235 fission spectrum neutron energy distribution. The fluence rate is determined from the Ni-58(n,p)Co-58 reaction rate assuming a 0.092 barn fission spectrum averaged cross section for the reaction and a fission spectrum fraction of 0.692 for >1 MeV neutrons. Corrections for the burnout of the Co-58 isomers are made based on the measured 2200 m/s fluence rate, the exposure duration and the burnout cross sections of the isomers [1650 barns (71 days), 1.7 E+5 barns (9.1 hours)] at each position of the fluence rate measurement.
10. CENTERLINE FLU. RATE: The neutron fluence rate at the elevation assignment nearest to the ATR core centerline elevation (0.0).
11. AVG. MAX. FLU. RATE: The average of the highest three adjacent values.
12. MAX. FLU. RATE/MW (AVG.): The average maximum fluence rate divided by the average power level (MW) of the lobe or position.
13. K FACTOR: The conversion factor determined from the neutron monitor activity for converting the net count rate at each elevation to the absolute reaction product (^{60}Co or ^{58}Co) radioactivity per unit mass of the monitor material (d/s/mg).
14. RESONANCE CORRECTION: The fractional correction factor used to correct the Co-59(n, γ)Co-60 reaction rate for the epithermal neutron response at the position where the neutron monitor was located during irradiation. This correction factor was determined from cobalt "cadmium ratio" measurements at the same spatial location for the monitor geometry and atom density.
15. C/L BURNOUT CORRECTION: The correction factor for the burnout (transmutation) of the reaction products (Co-60, Co-58, Co-58m) of the neutron monitors during the cycle irradiation at the centerline fluence rate elevation. The burnout correction factors for other elevation assignments will vary (nonlinearly) depending on the "thermal" neutron fluence rates and cycle durations.
16. BACKGROUND (counts/sec.): The wire scanner detector background environment counting rate at the time the neutron monitor wires were scanned.

17. CHECK SOURCE (counts/sec.)

Date Hour: The wire scanner detector check source count rate on the day the neutron monitor wires were scanned. The check source is a radioactive (^{60}Co) cobalt-aluminum wire mounted in a fixture which reproducibly positions it over the detector collimator. This check source is used to test counting functions (gain and stability) of the scanner counting system. The count rate is corrected for background and decay corrected to 08/30/08, 12:00.

ON PLOTS

18. REACTOR: Identification of the reactor with which the data are associated (normally ATR).

19. CYCLE POWER: The total megawatt days of power produced during the reactor cycle. This value is normally obtained from the ATR power history and distribution information supplied by PRP.

20. MATERIAL: The element name of the neutron monitor material. The "thermal" neutron monitor material is normally an alloy (CoAl) of cobalt (Co) and aluminum (Al) where the weight percent is given preceding the percent (%) symbol.

21. EXPERIMENT: The identification code given to the experiment located in the loop. This information is provided by PRP.

POWER HISTORY AND DISTRIBUTION

CYCLE 169A

10/30/20

To

4/23/21

	NW	NE	C	SW	SE	TOTAL MWD
MWD	1265.00	1267.00	1347.00	1433.00	1458.00	6770.00
EFPD	63.37					
MWD/44 = EFF. TE.	28.750	28.795	30.614	32.568	33.136	
EFF. TE. / EFPD = PF	.454	.454	.483	.514	.523	
MWD/EFPD = AVG. POWER (MW)	19.96	19.99	21.26	22.61	23.01	
TOTAL MWD/EFPD = AVERAGE FULL POWER (MW)	106.83					

The following power history was used for fluence rate determinations

Days	Power (MW)	Power Factor (P.F.)
63.37	106.83	1.00
82.00	0	0

CYCLE: 169A
EFPD: 63.4

POSITION: N-1
AVERAGE MW: 20.4

MONITOR ID: SR-246
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	8.85E+12	1.23E+13
22.75	1.50E+13	2.29E+13
20.75	4.30E+13	3.31E+13
18.75	8.34E+13	4.16E+13
16.75	1.13E+14	5.32E+13
14.75	1.34E+14	5.78E+13
12.75	1.54E+14	6.66E+13
10.75	1.69E+14	6.91E+13
8.75	1.77E+14	7.31E+13
6.75	1.83E+14	7.68E+13
4.75	1.90E+14	7.46E+13
2.75	1.97E+14	7.57E+13
0.75	1.94E+14	7.99E+13
-1.25	1.97E+14	7.95E+13
-3.25	1.95E+14	7.77E+13
-5.25	1.88E+14	7.88E+13
-7.25	1.84E+14	7.41E+13
-9.25	1.79E+14	7.55E+13
-11.25	1.70E+14	7.13E+13
-13.25	1.55E+14	6.54E+13
-15.25	1.42E+14	6.12E+13
-17.25	1.21E+14	5.34E+13
-19.25	1.01E+14	4.73E+13
-21.25	8.09E+13	3.92E+13
-23.25	6.29E+13	2.51E+13
-25.25	4.68E+13	1.40E+13

CENTER LINE FLU. RATE	1.94E+14	7.99E+13
AVG. MAX. FLU. RATE	1.96E+14	7.90E+13
MAX. FLU. RATE/MW (AVG.)	9.61E+12	3.87E+12
K FACTOR	1541.67	2201.30
RESONANCE CORRECTION	0.76	NA
C/L. BURNOUT CORRECTION	1.002	2.450
BACKGROUND (COUNTS/SEC.)	9.36	9.36
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

ATR NEUTRON MONITOR RESULTS

PAGE: 2

CYCLE: 169A
EFPD: 63.4POSITION: N-3
AVERAGE MW: 20.4MONITOR ID: SR-247
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	9.05E+12	1.06E+13
22.75	1.53E+13	2.26E+13
20.75	3.66E+13	4.00E+13
18.75	8.13E+13	5.80E+13
16.75	1.12E+14	6.91E+13
14.75	1.35E+14	8.33E+13
12.75	1.51E+14	9.27E+13
10.75	1.68E+14	9.99E+13
8.75	1.78E+14	1.02E+14
6.75	1.84E+14	1.07E+14
4.75	1.89E+14	1.09E+14
2.75	1.96E+14	1.10E+14
0.75	1.97E+14	1.09E+14
-1.25	1.97E+14	1.10E+14
-3.25	1.96E+14	1.11E+14
-5.25	1.91E+14	1.07E+14
-7.25	1.82E+14	1.07E+14
-9.25	1.77E+14	1.01E+14
-11.25	1.69E+14	9.90E+13
-13.25	1.54E+14	9.26E+13
-15.25	1.40E+14	8.56E+13
-17.25	1.25E+14	7.73E+13
-19.25	1.05E+14	6.74E+13
-21.25	8.49E+13	5.51E+13
-23.25	6.59E+13	4.00E+13
-25.25	5.62E+13	2.46E+13

CENTER LINE FLU. RATE	1.97E+14	1.09E+14
AVG. MAX. FLU. RATE	1.97E+14	1.10E+14
MAX. FLU. RATE/MW (AVG.)	9.65E+12	5.39E+12
K FACTOR	1540.00	2194.36
RESONANCE CORRECTION	0.76	NA
C/L. BURNOUT CORRECTION	1.002	2.478
BACKGROUND (COUNTS/SEC.)	9.45	9.45
CHECK SOURCE (COUNTS/SEC.)		
06/28/21 08:29	3295.	3295.

ATR NEUTRON MONITOR RESULTS

PAGE: 3

CYCLE: 169A
EFPD: 63.4POSITION: N-4
AVERAGE MW: 20.4MONITOR ID: SR-248
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	8.14E+12	8.77E+12
22.75	1.48E+13	1.45E+13
20.75	4.66E+13	2.07E+13
18.75	9.52E+13	2.43E+13
16.75	1.30E+14	3.35E+13
14.75	1.56E+14	3.90E+13
12.75	1.73E+14	4.06E+13
10.75	1.88E+14	4.58E+13
8.75	2.01E+14	4.79E+13
6.75	2.12E+14	5.00E+13
4.75	2.20E+14	5.19E+13
2.75	2.19E+14	5.28E+13
0.75	2.20E+14	5.38E+13
-1.25	2.19E+14	5.30E+13
-3.25	2.16E+14	5.20E+13
-5.25	2.12E+14	5.16E+13
-7.25	2.04E+14	5.03E+13
-9.25	1.92E+14	4.64E+13
-11.25	1.80E+14	4.58E+13
-13.25	1.67E+14	4.25E+13
-15.25	1.54E+14	3.68E+13
-17.25	1.35E+14	3.12E+13
-19.25	1.13E+14	2.75E+13
-21.25	8.97E+13	2.26E+13
-23.25	6.73E+13	1.58E+13
-25.25	4.74E+13	9.97E+12

CENTER LINE FLU. RATE	2.20E+14	5.38E+13
AVG. MAX. FLU. RATE	2.20E+14	5.32E+13
MAX. FLU. RATE/MW (AVG.)	1.08E+13	2.61E+12
K FACTOR	1539.40	2201.21
RESONANCE CORRECTION	0.81	NA
C/L. BURNOUT CORRECTION	1.002	2.671
BACKGROUND (COUNTS/SEC.)	8.64	8.64
CHECK SOURCE (COUNTS/SEC.)		
06/23/21 11:43	3267.	3267.

CYCLE: 169A
EFPD: 63.4

POSITION: SE-1
AVERAGE MW: 23.0

MONITOR ID: SR-249
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.02E+13	1.44E+13
22.75	1.65E+13	2.89E+13
20.75	4.60E+13	4.74E+13
18.75	8.17E+13	6.26E+13
16.75	1.11E+14	7.78E+13
14.75	1.33E+14	9.20E+13
12.75	1.50E+14	1.00E+14
10.75	1.56E+14	1.08E+14
8.75	1.68E+14	1.20E+14
6.75	1.80E+14	1.25E+14
4.75	1.96E+14	1.27E+14
2.75	1.99E+14	1.27E+14
0.75	2.05E+14	1.30E+14
-1.25	2.06E+14	1.22E+14
-3.25	2.02E+14	1.27E+14
-5.25	1.89E+14	1.28E+14
-7.25	1.78E+14	1.22E+14
-9.25	1.75E+14	1.13E+14
-11.25	1.76E+14	1.11E+14
-13.25	1.67E+14	1.02E+14
-15.25	1.48E+14	9.01E+13
-17.25	1.26E+14	7.56E+13
-19.25	9.77E+13	6.59E+13
-21.25	7.47E+13	4.99E+13
-23.25	5.95E+13	3.21E+13
-25.25	5.02E+13	1.62E+13

CENTER LINE FLU. RATE	2.05E+14	1.30E+14
AVG. MAX. FLU. RATE	2.04E+14	1.28E+14
MAX. FLU. RATE/MW (AVG.)	8.87E+12	5.56E+12
K FACTOR	1563.10	2185.89
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.538
BACKGROUND (COUNTS/SEC.)	8.18	8.18
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

CYCLE: 169A
EFPD: 63.4

POSITION: SE-2
AVERAGE MW: 23.0

MONITOR ID: SR-250
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	9.35E+12	1.40E+13
22.75	1.53E+13	2.77E+13
20.75	4.37E+13	3.84E+13
18.75	7.89E+13	6.00E+13
16.75	1.09E+14	7.33E+13
14.75	1.30E+14	8.28E+13
12.75	1.44E+14	9.28E+13
10.75	1.51E+14	1.02E+14
8.75	1.62E+14	1.05E+14
6.75	1.76E+14	1.15E+14
4.75	1.91E+14	1.15E+14
2.75	1.97E+14	1.21E+14
0.75	1.99E+14	1.23E+14
-1.25	2.03E+14	1.22E+14
-3.25	1.95E+14	1.18E+14
-5.25	1.81E+14	1.12E+14
-7.25	1.73E+14	1.13E+14
-9.25	1.69E+14	1.06E+14
-11.25	1.70E+14	1.02E+14
-13.25	1.61E+14	9.03E+13
-15.25	1.44E+14	8.59E+13
-17.25	1.22E+14	7.31E+13
-19.25	9.23E+13	6.16E+13
-21.25	7.02E+13	4.28E+13
-23.25	5.61E+13	2.95E+13
-25.25	4.55E+13	1.48E+13

CENTER LINE FLU. RATE	1.99E+14	1.23E+14
AVG. MAX. FLU. RATE	2.00E+14	1.22E+14
MAX. FLU. RATE/MW (AVG.)	8.68E+12	5.29E+12
K FACTOR	1509.11	2154.56
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.488
BACKGROUND (COUNTS/SEC.)	8.67	8.67
CHECK SOURCE (COUNTS/SEC.)		
06/28/21 08:29	3295.	3295.

CYCLE: 169A
EFPD: 63.4

POSITION: SE-3
AVERAGE MW: 23.0

MONITOR ID: SR-251
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.06E+13	1.81E+13
22.75	1.77E+13	3.34E+13
20.75	4.87E+13	4.90E+13
18.75	8.98E+13	6.65E+13
16.75	1.21E+14	8.63E+13
14.75	1.42E+14	9.62E+13
12.75	1.58E+14	1.07E+14
10.75	1.69E+14	1.18E+14
8.75	1.80E+14	1.25E+14
6.75	1.91E+14	1.27E+14
4.75	2.08E+14	1.28E+14
2.75	2.10E+14	1.33E+14
0.75	2.15E+14	1.32E+14
-1.25	2.16E+14	1.36E+14
-3.25	2.15E+14	1.35E+14
-5.25	1.97E+14	1.29E+14
-7.25	1.87E+14	1.30E+14
-9.25	1.82E+14	1.23E+14
-11.25	1.83E+14	1.11E+14
-13.25	1.71E+14	1.07E+14
-15.25	1.56E+14	9.73E+13
-17.25	1.31E+14	8.46E+13
-19.25	1.02E+14	7.04E+13
-21.25	7.99E+13	5.65E+13
-23.25	6.43E+13	3.05E+13
-25.25	5.28E+13	1.64E+13

CENTER LINE FLU. RATE	2.15E+14	1.32E+14
AVG. MAX. FLU. RATE	2.15E+14	1.34E+14
MAX. FLU. RATE/MW (AVG.)	9.35E+12	5.84E+12
K FACTOR	1578.62	2185.41
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.622
BACKGROUND (COUNTS/SEC.)	8.35	8.35
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

CYCLE: 169A
EFPD: 63.4

POSITION: SE-4
AVERAGE MW: 23.0

MONITOR ID: SR-252
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.01E+13	1.66E+13
22.75	1.72E+13	3.16E+13
20.75	4.48E+13	4.86E+13
18.75	8.51E+13	6.32E+13
16.75	1.15E+14	8.39E+13
14.75	1.37E+14	9.61E+13
12.75	1.53E+14	9.98E+13
10.75	1.60E+14	1.12E+14
8.75	1.72E+14	1.21E+14
6.75	1.86E+14	1.27E+14
4.75	2.02E+14	1.30E+14
2.75	2.07E+14	1.31E+14
0.75	2.07E+14	1.33E+14
-1.25	2.10E+14	1.33E+14
-3.25	2.09E+14	1.28E+14
-5.25	1.90E+14	1.24E+14
-7.25	1.85E+14	1.29E+14
-9.25	1.78E+14	1.21E+14
-11.25	1.76E+14	1.09E+14
-13.25	1.70E+14	1.00E+14
-15.25	1.55E+14	9.79E+13
-17.25	1.31E+14	8.71E+13
-19.25	1.04E+14	7.46E+13
-21.25	7.73E+13	5.37E+13
-23.25	6.40E+13	3.48E+13
-25.25	5.55E+13	2.03E+13

CENTER LINE FLU. RATE	2.07E+14	1.33E+14
AVG. MAX. FLU. RATE	2.08E+14	1.32E+14
MAX. FLU. RATE/MW (AVG.)	9.06E+12	5.74E+12
K FACTOR	1541.12	2237.13
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.556
BACKGROUND (COUNTS/SEC.)	8.76	8.76
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

ATR NEUTRON MONITOR RESULTS

PAGE: 8

CYCLE: 169A
EFPD: 63.4POSITION: SW-1
AVERAGE MW: 22.6MONITOR ID: SR-253
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.05E+13	1.47E+13
22.75	1.79E+13	2.72E+13
20.75	4.67E+13	4.78E+13
18.75	8.36E+13	6.29E+13
16.75	1.15E+14	8.14E+13
14.75	1.37E+14	9.30E+13
12.75	1.48E+14	1.01E+14
10.75	1.58E+14	1.08E+14
8.75	1.68E+14	1.24E+14
6.75	1.78E+14	1.28E+14
4.75	1.98E+14	1.28E+14
2.75	2.02E+14	1.31E+14
0.75	2.05E+14	1.31E+14
-1.25	2.14E+14	1.33E+14
-3.25	2.05E+14	1.28E+14
-5.25	1.86E+14	1.33E+14
-7.25	1.81E+14	1.23E+14
-9.25	1.72E+14	1.18E+14
-11.25	1.61E+14	1.17E+14
-13.25	1.47E+14	1.09E+14
-15.25	1.32E+14	9.63E+13
-17.25	1.21E+14	8.52E+13
-19.25	1.02E+14	7.04E+13
-21.25	8.34E+13	5.79E+13
-23.25	6.81E+13	3.78E+13
-25.25	5.52E+13	2.06E+13

CENTER LINE FLU. RATE	2.05E+14	1.31E+14
AVG. MAX. FLU. RATE	2.08E+14	1.32E+14
MAX. FLU. RATE/MW (AVG.)	9.20E+12	5.83E+12
K FACTOR	1524.01	2206.83
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.543
BACKGROUND (COUNTS/SEC.)	9.03	9.03
CHECK SOURCE (COUNTS/SEC.)		
06/23/21 11:43	3267.	3267.

CYCLE: 169A
EFPD: 63.4

POSITION: SW-2
AVERAGE MW: 22.6

MONITOR ID: SR-254
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	9.39E+12	1.45E+13
22.75	1.65E+13	2.80E+13
20.75	4.40E+13	4.28E+13
18.75	7.97E+13	6.13E+13
16.75	1.10E+14	7.51E+13
14.75	1.30E+14	8.56E+13
12.75	1.44E+14	9.70E+13
10.75	1.54E+14	1.03E+14
8.75	1.61E+14	1.11E+14
6.75	1.76E+14	1.15E+14
4.75	1.96E+14	1.21E+14
2.75	2.03E+14	1.18E+14
0.75	2.07E+14	1.21E+14
-1.25	2.10E+14	1.25E+14
-3.25	2.04E+14	1.23E+14
-5.25	1.89E+14	1.20E+14
-7.25	1.79E+14	1.09E+14
-9.25	1.72E+14	1.14E+14
-11.25	1.53E+14	1.05E+14
-13.25	1.44E+14	9.46E+13
-15.25	1.33E+14	8.77E+13
-17.25	1.17E+14	7.34E+13
-19.25	9.92E+13	6.59E+13
-21.25	7.85E+13	4.87E+13
-23.25	6.44E+13	3.03E+13
-25.25	5.00E+13	1.44E+13

CENTER LINE FLU. RATE	2.07E+14	1.21E+14
AVG. MAX. FLU. RATE	2.07E+14	1.23E+14
MAX. FLU. RATE/MW (AVG.)	9.16E+12	5.43E+12
K FACTOR	1530.81	2205.71
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.558
BACKGROUND (COUNTS/SEC.)	8.72	8.72
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

CYCLE: 169A
EFPD: 63.4

POSITION: SW-3
AVERAGE MW: 22.6

MONITOR ID: SR-255
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	8.55E+12	1.14E+13
22.75	1.44E+13	2.40E+13
20.75	3.87E+13	3.84E+13
18.75	7.40E+13	5.61E+13
16.75	1.01E+14	7.34E+13
14.75	1.21E+14	8.21E+13
12.75	1.31E+14	9.17E+13
10.75	1.40E+14	1.01E+14
8.75	1.48E+14	1.04E+14
6.75	1.63E+14	1.13E+14
4.75	1.81E+14	1.17E+14
2.75	1.88E+14	1.19E+14
0.75	1.91E+14	1.23E+14
-1.25	1.96E+14	1.20E+14
-3.25	1.91E+14	1.17E+14
-5.25	1.78E+14	1.17E+14
-7.25	1.71E+14	1.17E+14
-9.25	1.61E+14	1.11E+14
-11.25	1.45E+14	9.74E+13
-13.25	1.35E+14	9.70E+13
-15.25	1.23E+14	8.83E+13
-17.25	1.08E+14	7.47E+13
-19.25	9.29E+13	6.34E+13
-21.25	7.39E+13	4.69E+13
-23.25	5.83E+13	3.31E+13
-25.25	4.76E+13	1.54E+13

CENTER LINE FLU. RATE	1.91E+14	1.23E+14
AVG. MAX. FLU. RATE	1.92E+14	1.20E+14
MAX. FLU. RATE/MW (AVG.)	8.51E+12	5.33E+12
K FACTOR	1552.58	2159.41
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.423
BACKGROUND (COUNTS/SEC.)	9.13	9.13
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

ATR NEUTRON MONITOR RESULTS

PAGE: 11

CYCLE: 169A
EFPD: 63.4POSITION: SW-4
AVERAGE MW: 22.6MONITOR ID: SR-256
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	9.25E+12	1.46E+13
22.75	1.47E+13	2.94E+13
20.75	4.03E+13	4.52E+13
18.75	7.40E+13	6.46E+13
16.75	1.02E+14	7.52E+13
14.75	1.21E+14	9.13E+13
12.75	1.34E+14	1.02E+14
10.75	1.38E+14	1.13E+14
8.75	1.49E+14	1.20E+14
6.75	1.64E+14	1.25E+14
4.75	1.83E+14	1.31E+14
2.75	1.88E+14	1.33E+14
0.75	1.94E+14	1.39E+14
-1.25	1.98E+14	1.40E+14
-3.25	1.87E+14	1.26E+14
-5.25	1.78E+14	1.29E+14
-7.25	1.72E+14	1.28E+14
-9.25	1.61E+14	1.28E+14
-11.25	1.46E+14	1.19E+14
-13.25	1.34E+14	1.01E+14
-15.25	1.22E+14	9.53E+13
-17.25	1.09E+14	8.09E+13
-19.25	9.70E+13	6.69E+13
-21.25	7.87E+13	5.50E+13
-23.25	6.23E+13	3.57E+13
-25.25	5.18E+13	1.66E+13

CENTER LINE FLU. RATE	1.94E+14	1.39E+14
AVG. MAX. FLU. RATE	1.93E+14	1.37E+14
MAX. FLU. RATE/MW (AVG.)	8.55E+12	6.06E+12
K FACTOR	1542.41	2141.00
RESONANCE CORRECTION	0.78	NA
C/L. BURNOUT CORRECTION	1.002	2.447
BACKGROUND (COUNTS/SEC.)	9.08	9.08
CHECK SOURCE (COUNTS/SEC.)		
06/23/21 11:43	3267.	3267.

CYCLE: 169A
EFPD: 63.4

POSITION: W-1
AVERAGE MW: 21.3

MONITOR ID: SR-257
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.19E+13	1.68E+13
22.75	1.95E+13	3.22E+13
20.75	5.34E+13	4.64E+13
18.75	9.66E+13	6.59E+13
16.75	1.34E+14	7.85E+13
14.75	1.59E+14	9.05E+13
12.75	1.78E+14	1.00E+14
10.75	1.92E+14	1.02E+14
8.75	2.05E+14	1.11E+14
6.75	2.15E+14	1.15E+14
4.75	2.20E+14	1.16E+14
2.75	2.25E+14	1.18E+14
0.75	2.28E+14	1.12E+14
-1.25	2.42E+14	1.25E+14
-3.25	2.26E+14	1.13E+14
-5.25	2.16E+14	1.16E+14
-7.25	2.08E+14	1.13E+14
-9.25	2.01E+14	1.10E+14
-11.25	1.88E+14	1.04E+14
-13.25	1.72E+14	1.02E+14
-15.25	1.55E+14	8.92E+13
-17.25	1.35E+14	8.28E+13
-19.25	1.11E+14	7.30E+13
-21.25	8.67E+13	5.77E+13
-23.25	7.25E+13	3.69E+13
-25.25	6.11E+13	1.90E+13

CENTER LINE FLU. RATE	2.28E+14	1.12E+14
AVG. MAX. FLU. RATE	2.32E+14	1.18E+14
MAX. FLU. RATE/MW (AVG.)	1.09E+13	5.56E+12
K FACTOR	1472.48	2179.88
RESONANCE CORRECTION	0.76	NA
C/L. BURNOUT CORRECTION	1.003	2.741
BACKGROUND (COUNTS/SEC.)	9.08	9.08
CHECK SOURCE (COUNTS/SEC.)		
06/23/21 11:43	3267.	3267.

CYCLE: 169A
EFPD: 63.4

POSITION: W-2
AVERAGE MW: 21.3

MONITOR ID: SR-258
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.04E+13	1.39E+13
22.75	1.77E+13	2.85E+13
20.75	4.73E+13	4.73E+13
18.75	9.23E+13	6.16E+13
16.75	1.29E+14	7.75E+13
14.75	1.52E+14	9.13E+13
12.75	1.73E+14	9.82E+13
10.75	1.86E+14	1.03E+14
8.75	2.01E+14	1.12E+14
6.75	2.07E+14	1.19E+14
4.75	2.17E+14	1.22E+14
2.75	2.23E+14	1.26E+14
0.75	2.30E+14	1.30E+14
-1.25	2.29E+14	1.30E+14
-3.25	2.27E+14	1.26E+14
-5.25	2.19E+14	1.25E+14
-7.25	2.10E+14	1.20E+14
-9.25	2.03E+14	1.14E+14
-11.25	1.91E+14	1.14E+14
-13.25	1.73E+14	1.05E+14
-15.25	1.56E+14	9.61E+13
-17.25	1.36E+14	8.60E+13
-19.25	1.14E+14	7.19E+13
-21.25	9.07E+13	5.39E+13
-23.25	7.32E+13	4.12E+13
-25.25	6.25E+13	2.18E+13

CENTER LINE FLU. RATE	2.30E+14	1.30E+14
AVG. MAX. FLU. RATE	2.29E+14	1.29E+14
MAX. FLU. RATE/MW (AVG.)	1.07E+13	6.04E+12
K FACTOR	1519.88	2171.83
RESONANCE CORRECTION	0.76	NA
C/L. BURNOUT CORRECTION	1.003	2.753
BACKGROUND (COUNTS/SEC.)	8.77	8.77
CHECK SOURCE (COUNTS/SEC.)		
06/24/21 08:12	3268.	3268.

ATR NEUTRON MONITOR RESULTS

PAGE: 14

CYCLE: 169A
EFPD: 63.4POSITION: W-3
AVERAGE MW: 21.3MONITOR ID: SR-259
DATE: 10/30/20 to 04/23/21

ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	8.79E+12	9.31E+12
22.75	1.74E+13	1.59E+13
20.75	5.29E+13	2.25E+13
18.75	1.03E+14	3.05E+13
16.75	1.44E+14	3.84E+13
14.75	1.73E+14	4.43E+13
12.75	1.94E+14	4.96E+13
10.75	2.08E+14	5.31E+13
8.75	2.18E+14	5.69E+13
6.75	2.27E+14	5.94E+13
4.75	2.35E+14	6.11E+13
2.75	2.38E+14	6.44E+13
0.75	2.43E+14	6.57E+13
-1.25	2.42E+14	6.55E+13
-3.25	2.41E+14	6.36E+13
-5.25	2.34E+14	6.05E+13
-7.25	2.25E+14	5.86E+13
-9.25	2.20E+14	5.54E+13
-11.25	2.04E+14	5.46E+13
-13.25	1.87E+14	4.94E+13
-15.25	1.70E+14	4.40E+13
-17.25	1.45E+14	3.84E+13
-19.25	1.22E+14	3.34E+13
-21.25	9.46E+13	2.54E+13
-23.25	7.25E+13	1.79E+13
-25.25	4.97E+13	1.07E+13

CENTER LINE FLU. RATE	2.43E+14	6.57E+13
AVG. MAX. FLU. RATE	2.42E+14	6.52E+13
MAX. FLU. RATE/MW (AVG.)	1.14E+13	3.06E+12
K FACTOR	1546.48	2199.15
RESONANCE CORRECTION	0.81	NA
C/L. BURNOUT CORRECTION	1.003	2.863
BACKGROUND (COUNTS/SEC.)	10.17	10.17
CHECK SOURCE (COUNTS/SEC.)		
06/28/21 08:29	3295.	3295.

ATR NEUTRON MONITOR RESULTS

PAGE: 15

CYCLE: 169A
EFPD: 63.4POSITION: W-4
AVERAGE MW: 21.3MONITOR ID: SR-260
DATE: 10/30/20 to 04/23/21


ELEVATION from core CL (inches)	"THERMAL" 2200 m/s CO (n/cm**2/sec)	"FAST" >1 MeV NI (n/cm**2/sec)
24.73	1.04E+13	8.44E+12
22.75	1.76E+13	1.57E+13
20.75	4.92E+13	3.25E+13
18.75	9.56E+13	4.17E+13
16.75	1.34E+14	5.16E+13
14.75	1.59E+14	6.02E+13
12.75	1.86E+14	6.72E+13
10.75	2.03E+14	7.11E+13
8.75	2.06E+14	7.24E+13
6.75	2.16E+14	7.86E+13
4.75	2.21E+14	7.93E+13
2.75	2.34E+14	8.28E+13
0.75	2.39E+14	8.14E+13
-1.25	2.43E+14	7.96E+13
-3.25	2.37E+14	7.78E+13
-5.25	2.34E+14	7.79E+13
-7.25	2.26E+14	7.46E+13
-9.25	2.14E+14	7.27E+13
-11.25	2.04E+14	6.91E+13
-13.25	1.86E+14	6.30E+13
-15.25	1.68E+14	5.84E+13
-17.25	1.40E+14	5.24E+13
-19.25	1.16E+14	4.67E+13
-21.25	9.06E+13	3.94E+13
-23.25	7.17E+13	2.89E+13
-25.25	5.39E+13	1.84E+13

CENTER LINE FLU. RATE	2.39E+14	8.14E+13
AVG. MAX. FLU. RATE	2.40E+14	8.13E+13
MAX. FLU. RATE/MW (AVG.)	1.13E+13	3.82E+12
K FACTOR	1545.80	2168.62
RESONANCE CORRECTION	0.76	NA
C/L. BURNOUT CORRECTION	1.003	2.833
BACKGROUND (COUNTS/SEC.)	8.72	8.72
CHECK SOURCE (COUNTS/SEC.)		
06/28/21 08:29	3295.	3295.

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
 Monitor No.: SR-246 Position: N-1 Cycle Power: 6773.0 Mwd
 Average Maximum Fluence Rate: 1.96E+14 Material: 0.0976 %CoAl Experiment: ID-N

Averaged values over 63.4 Days reactor operations at 106.8 MW

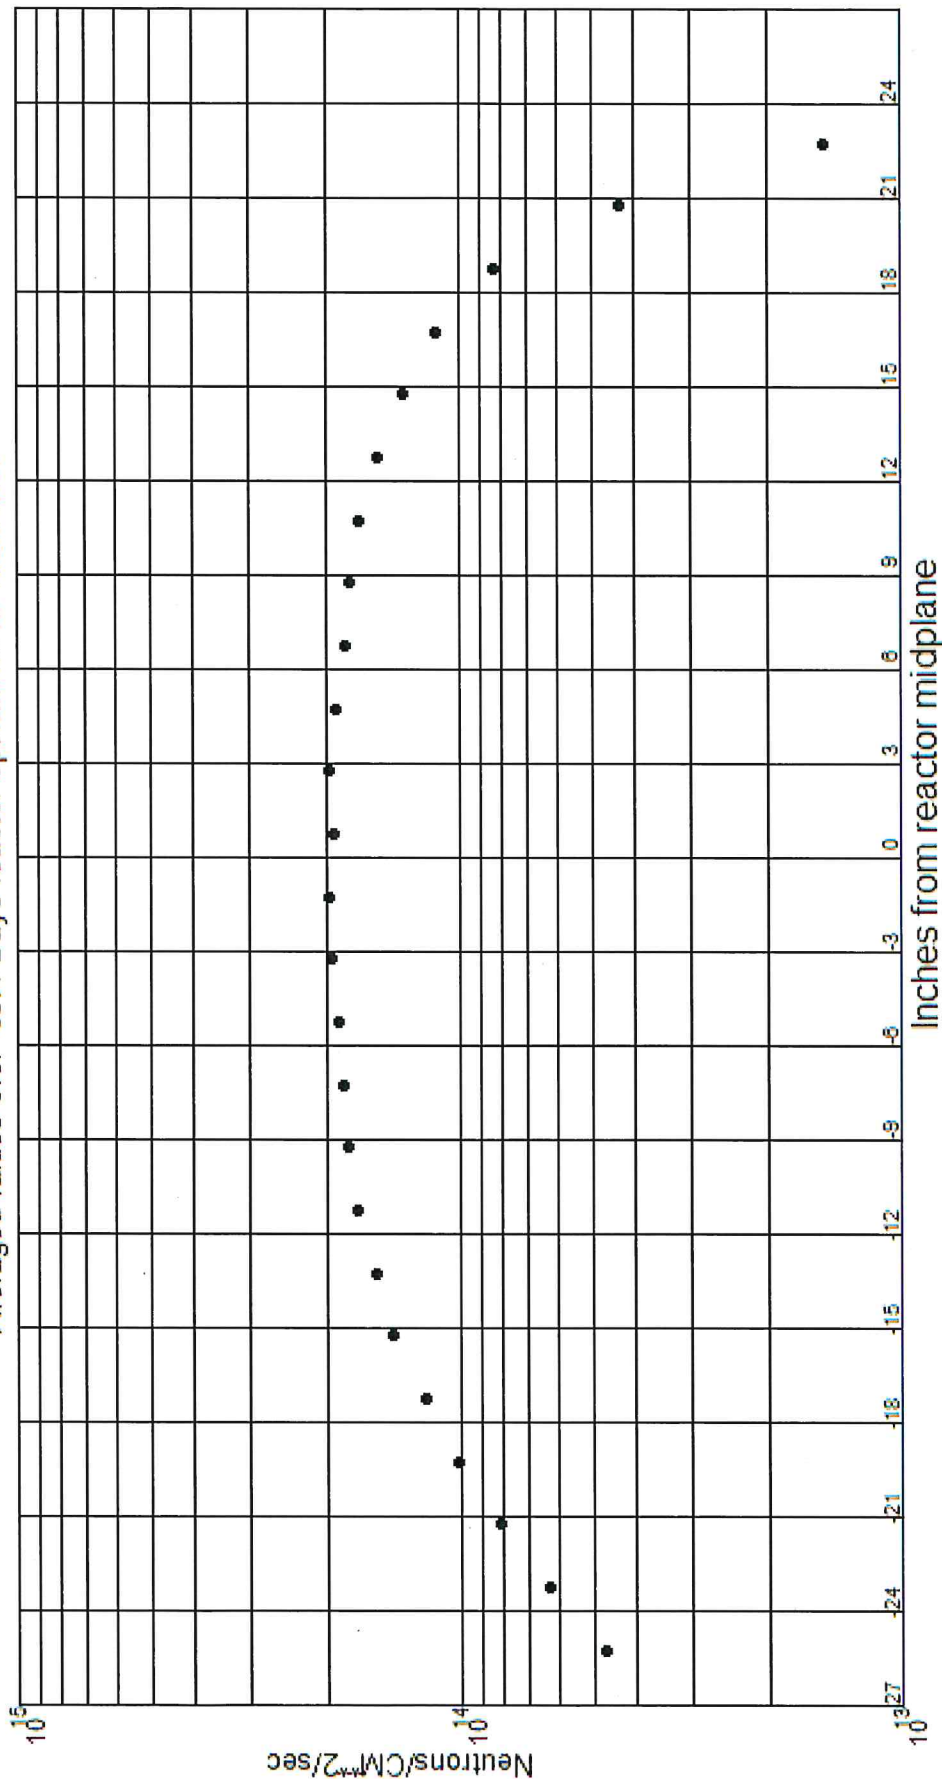

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-246


Position: N-1

Material: Nickel

Experiment: ID-N

Average Maximum Fluence Rate: 7.90E+13


Averaged values over 63.4 Days reactor operations at 106.8 MW

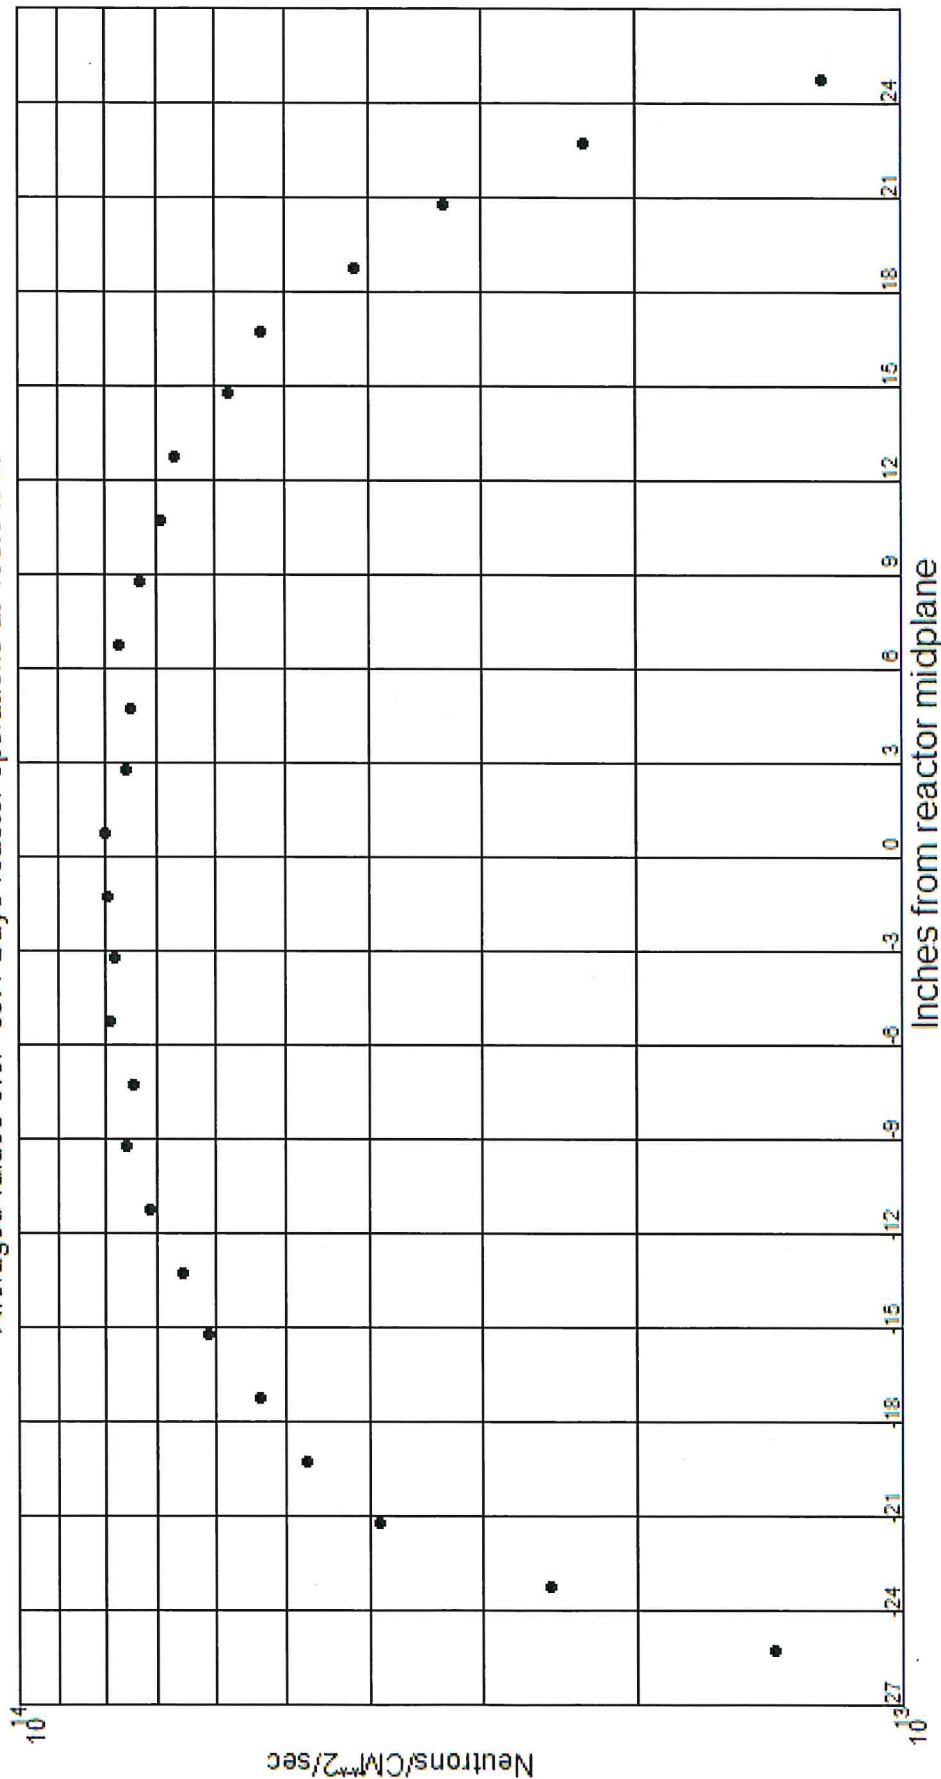

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-247
 Average Maximum Fluence Rate: 1.97E+14
 Cycle: 169A
 Position: N-3
 Cycle Power: 6773.0 Mwd
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: ID-N

Averaged values over 63.4 Days reactor operations at 106.8 MW

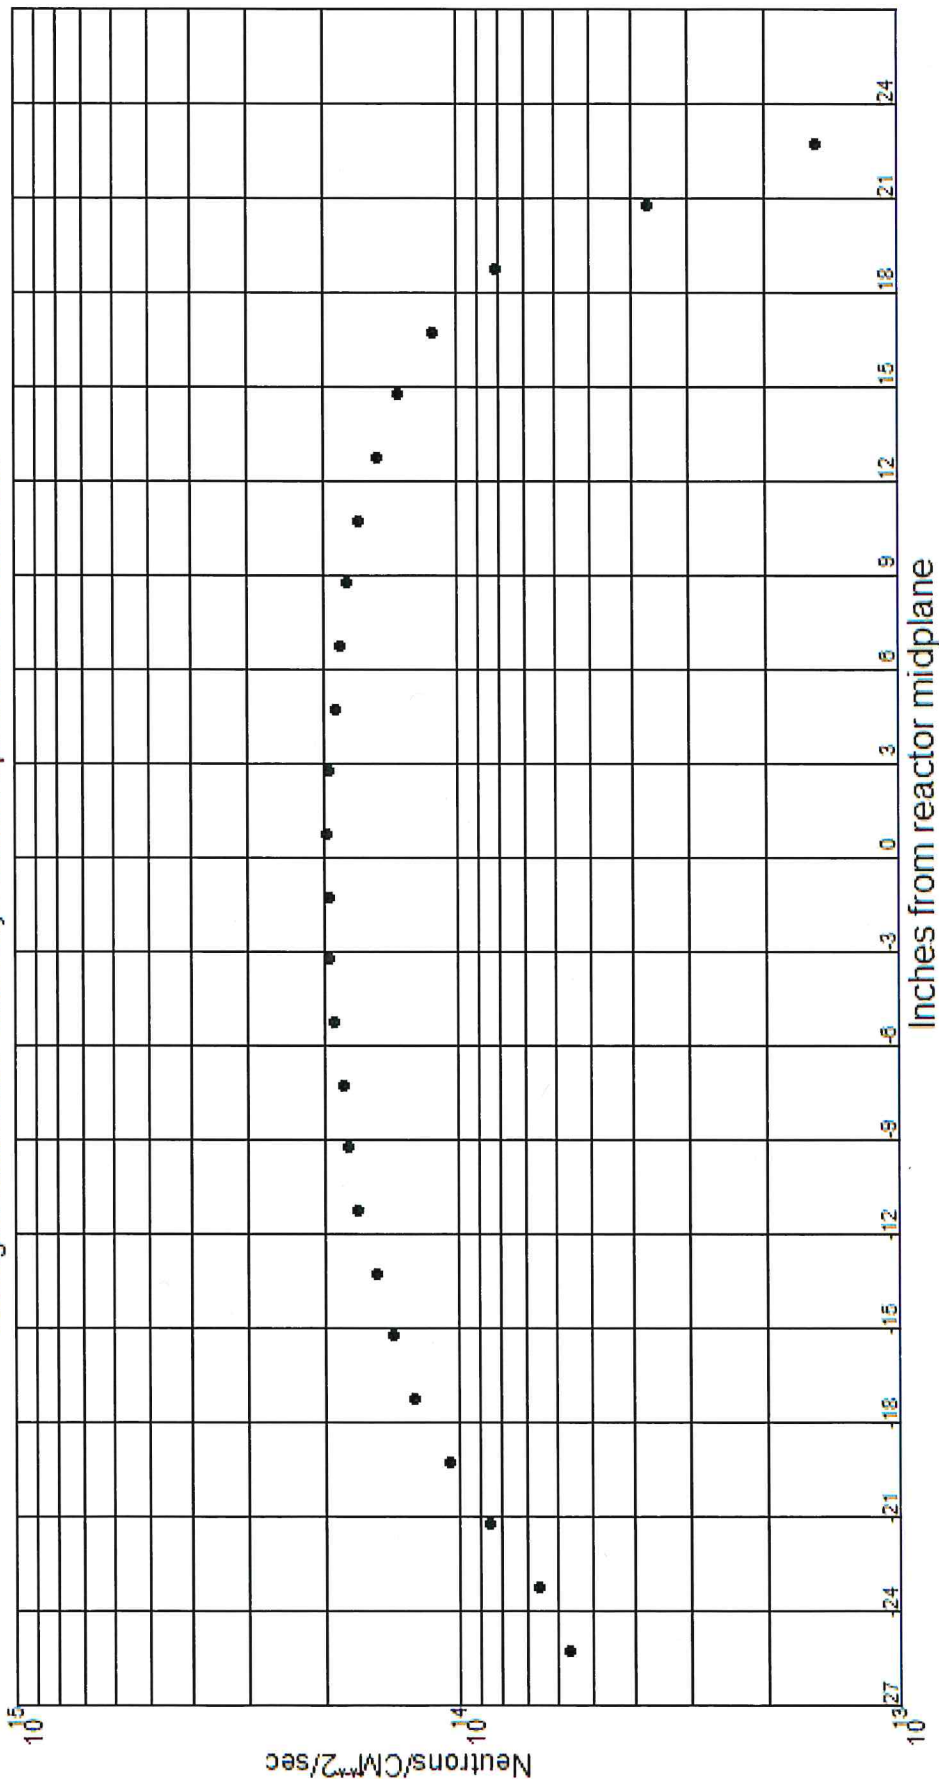

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-247


Position: N-3

Material: Nickel

Experiment: ID-N

Average Maximum Fluence Rate: 1.10E+14


Averaged values over 63.4 Days reactor operations at 106.8 MW

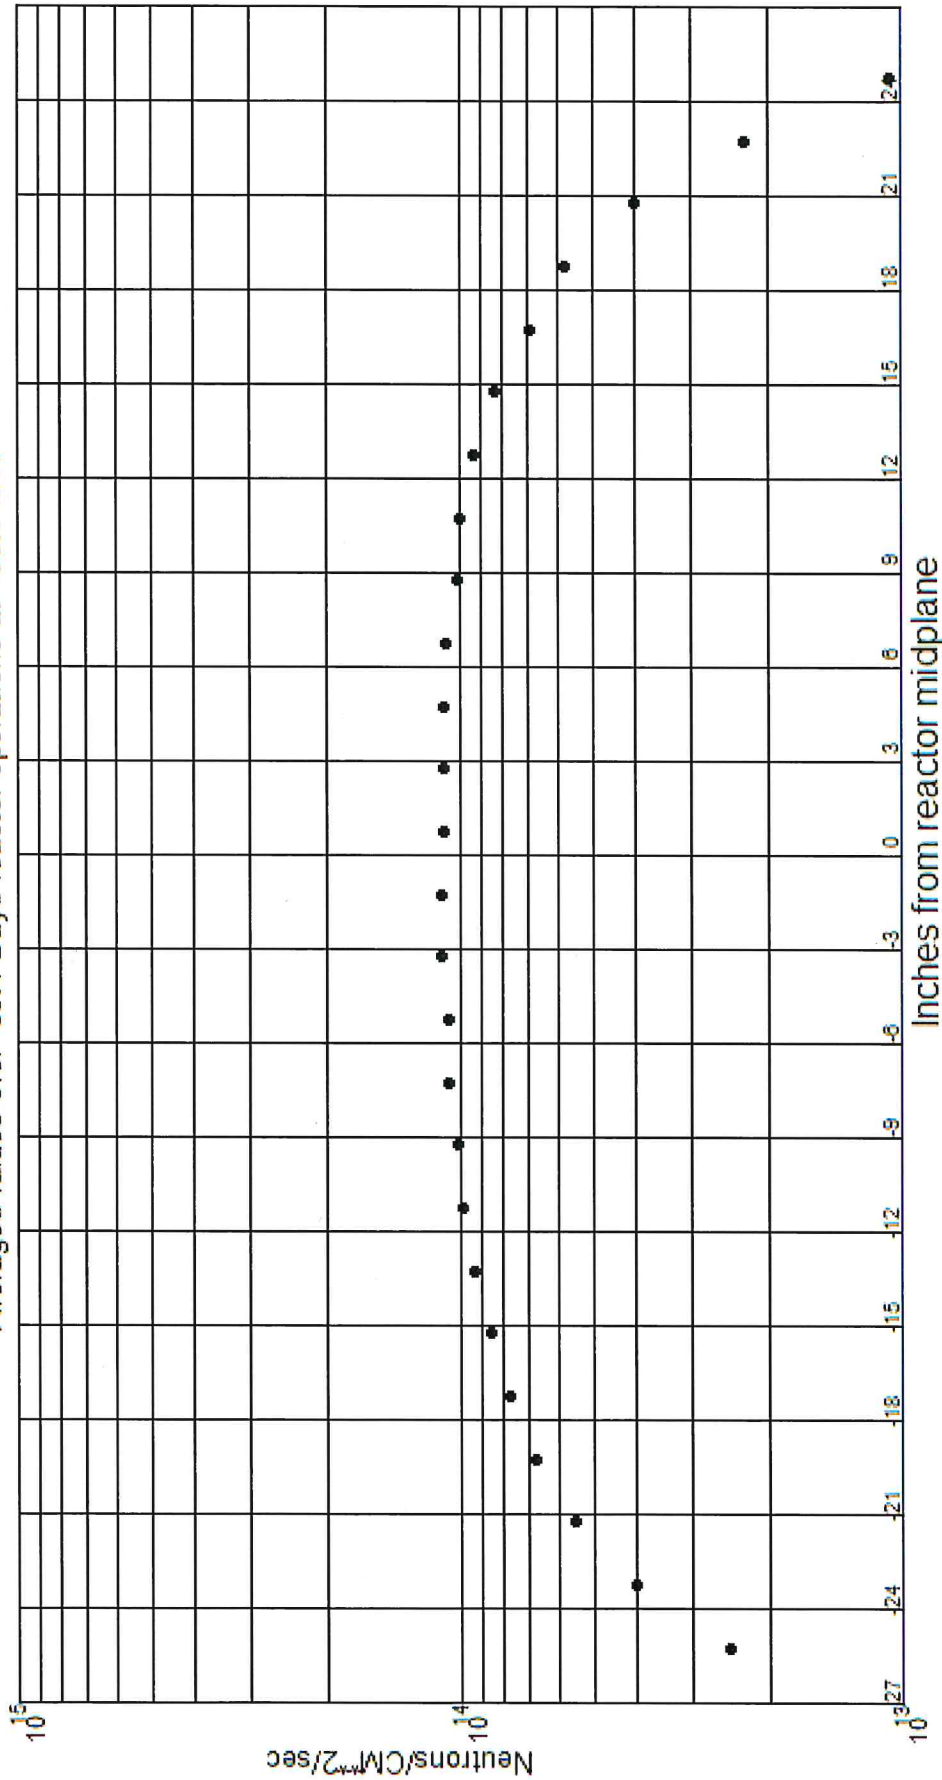

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
Monitor No.: SR-248 Position: N-4 Cycle Power: 6773.0 Mwd
Average Maximum Fluence Rate: 2.20E+14 Material: 0.0976 %CoAl Experiment: ID-N

Averaged values over 63.4 Days reactor operations at 106.8 MW

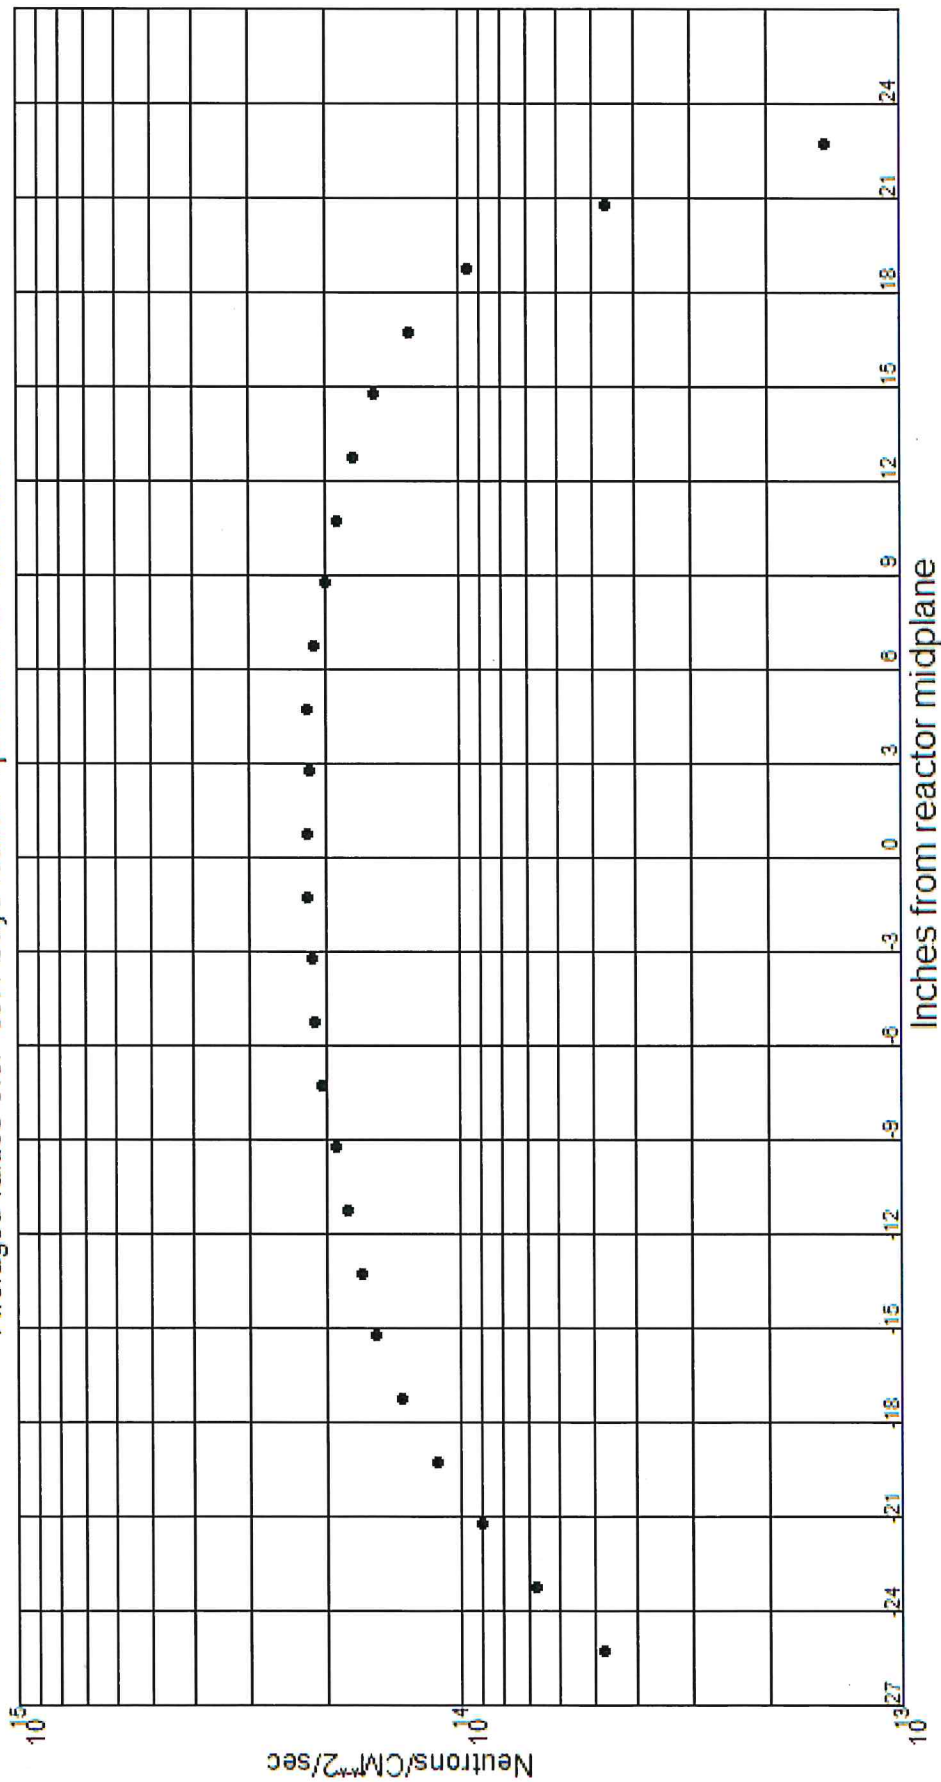

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-248


Position: N-4

Material: Nickel

Experiment: ID-N

Average Maximum Fluence Rate: 5.32E+13


Averaged values over 63.4 Days reactor operations at 106.8 MW

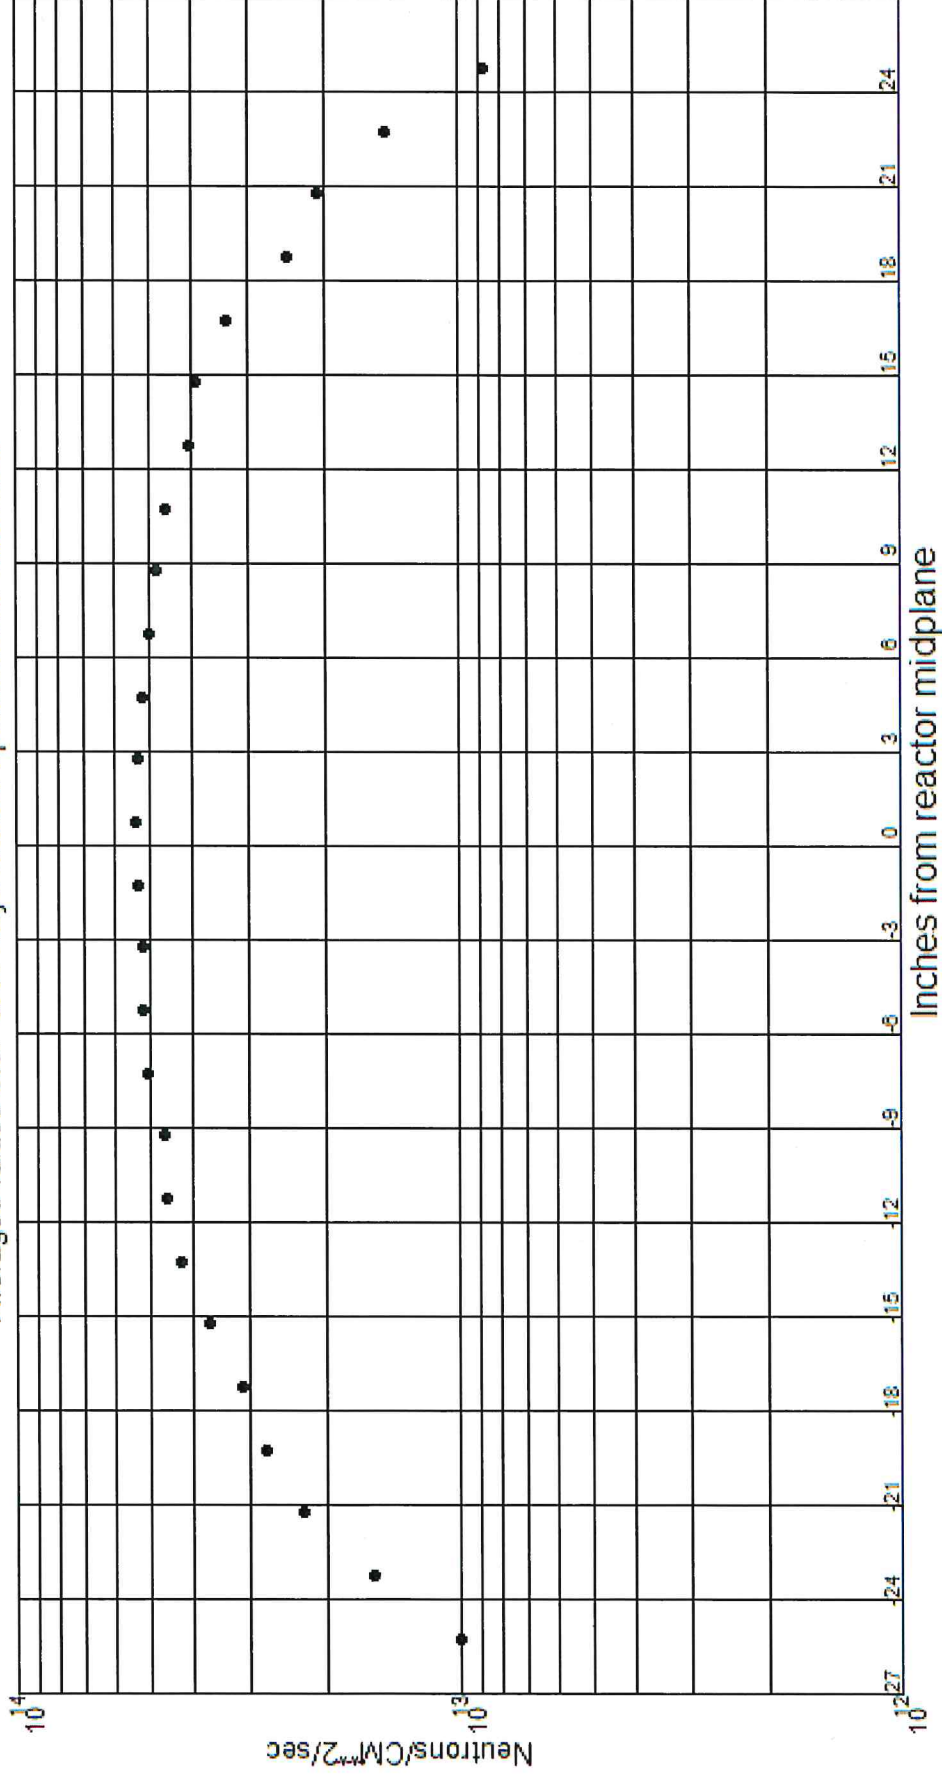

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-249
 Average Maximum Fluence Rate: 2.04E+14
 Cycle: 169A
 Position: SE-1
 Cycle Power: 6773.0 Mw
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 2B-SE


Averaged values over 63.4 Days reactor operations at 106.8 MW

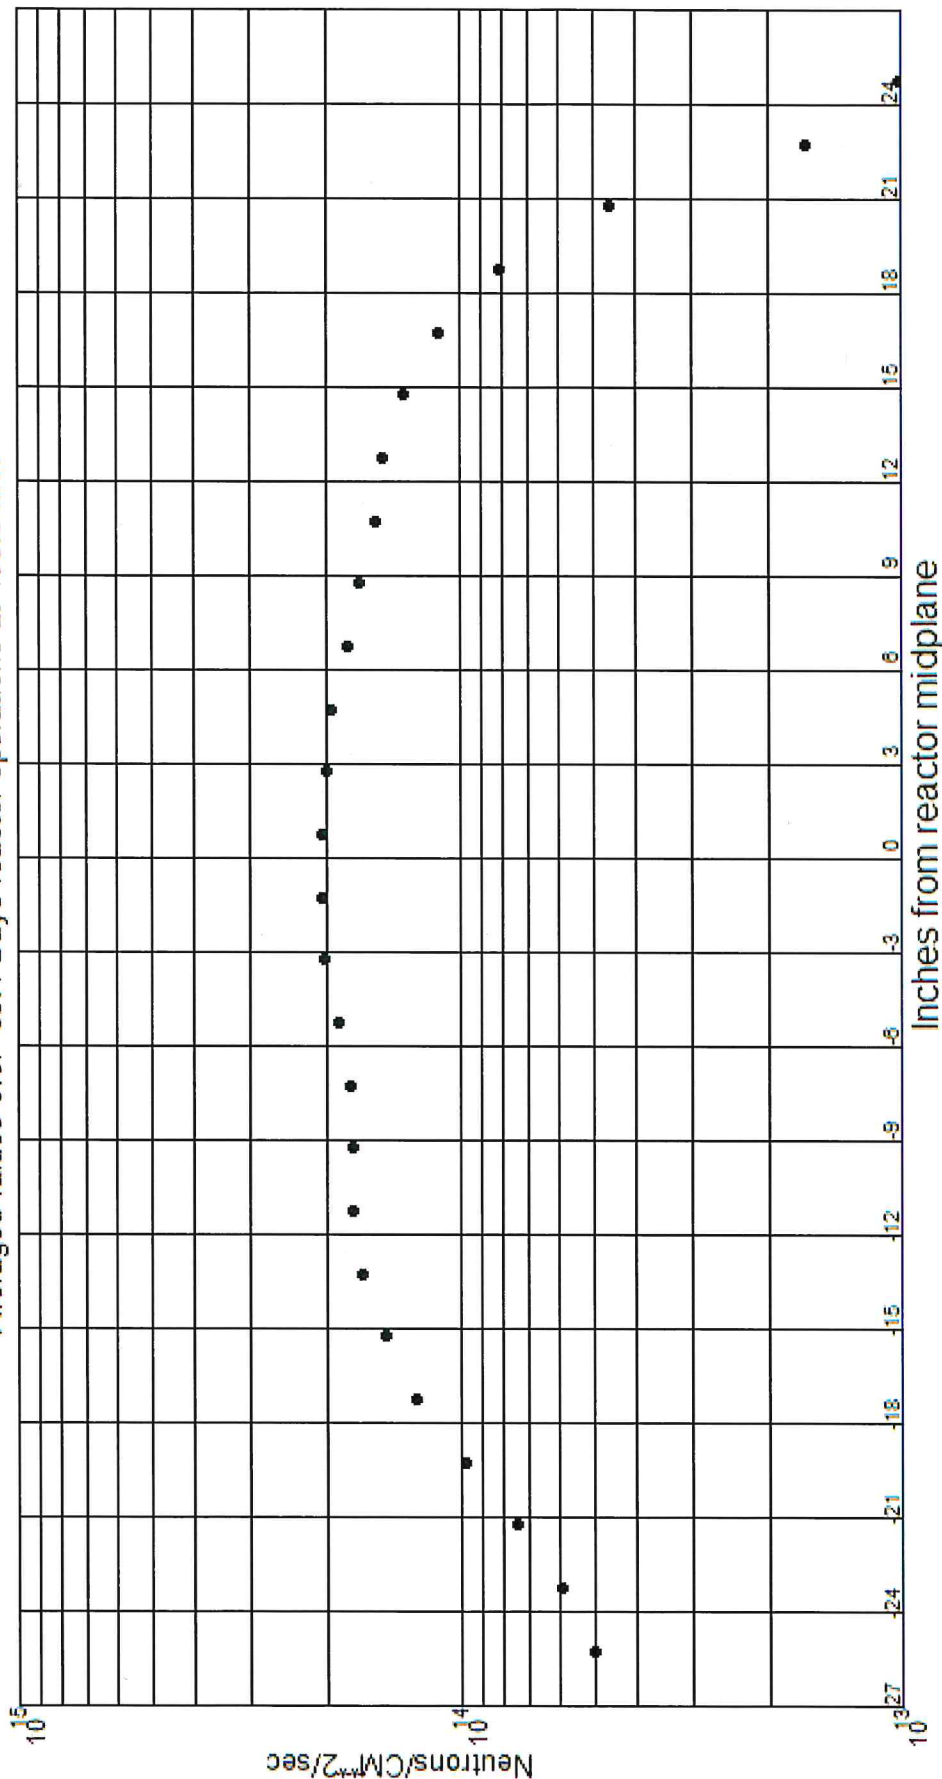

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR
 Monitor No.: SR-249
 Average Maximum Fluence Rate: 1.28E+14
 Cycle: 169A
 Position: SE-1
 Cycle Power: 6773.0 Mwd
 Material: Nickel
 Date: 10/30/20-04/23/21
 Experiment: 2B-SE


Averaged values over 63.4 Days reactor operations at 106.8 MW

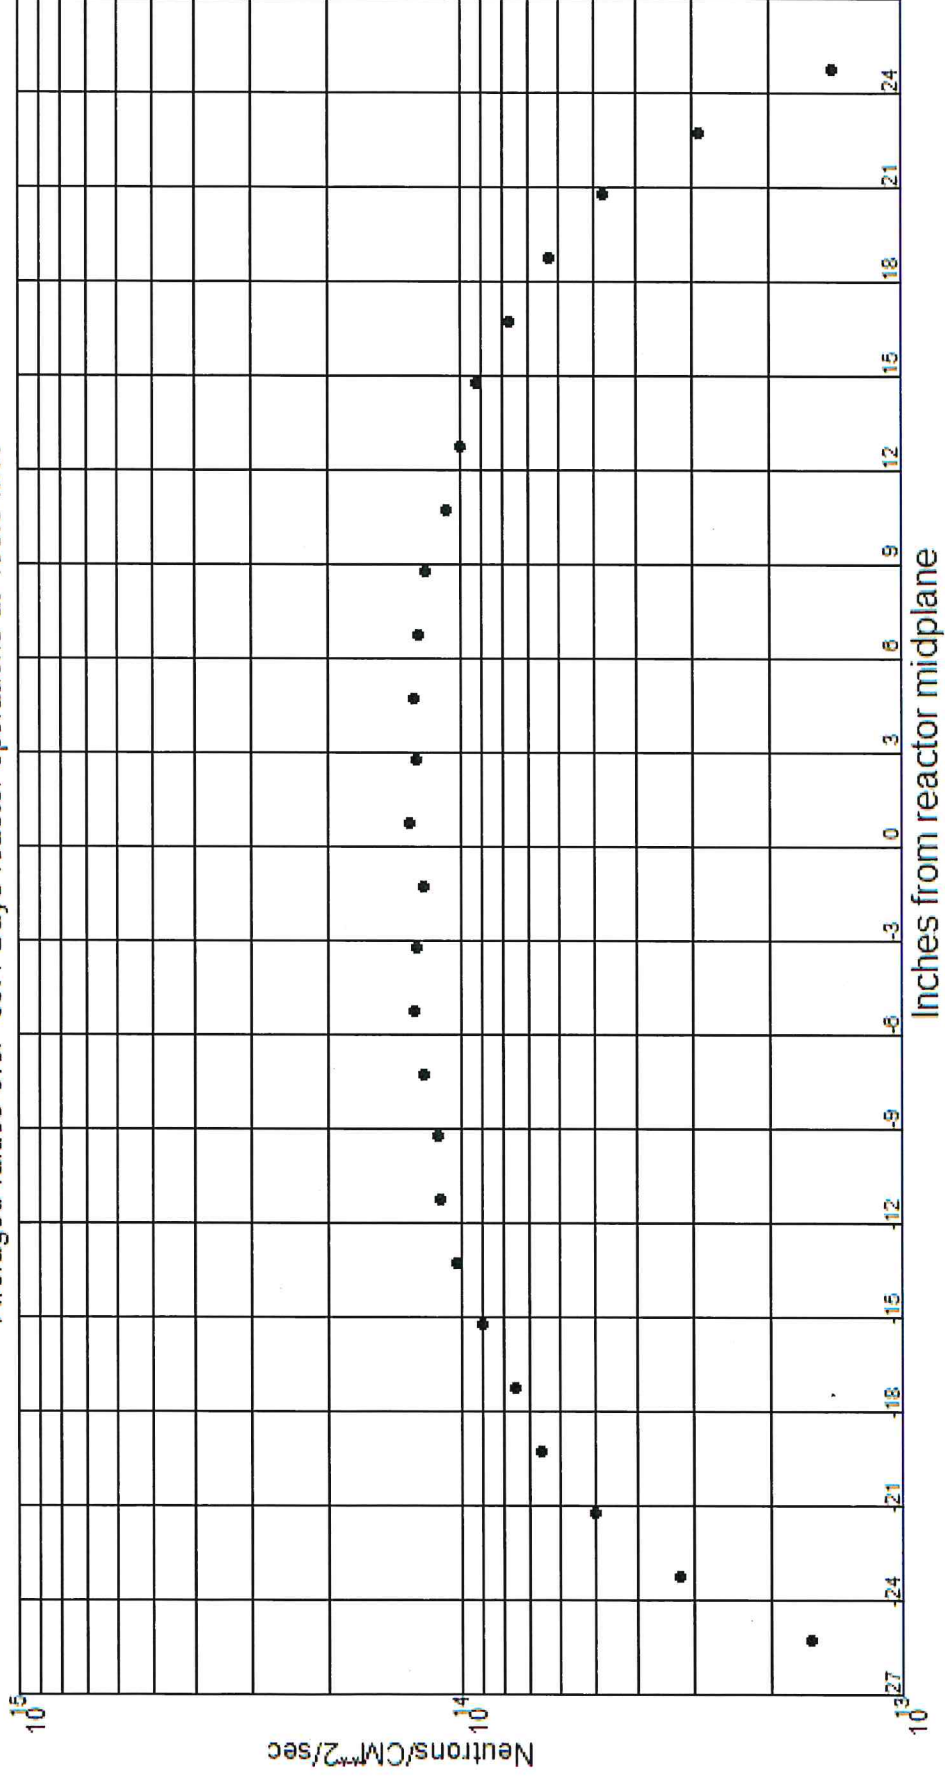

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
Monitor No.: SR-250 Position: SE-2 Experiment: 2B-SE
Average Maximum Fluence Rate: 2.00E+14 Material: 0.0976 %CoAl


Averaged values over 63.4 Days reactor operations at 106.8 MW

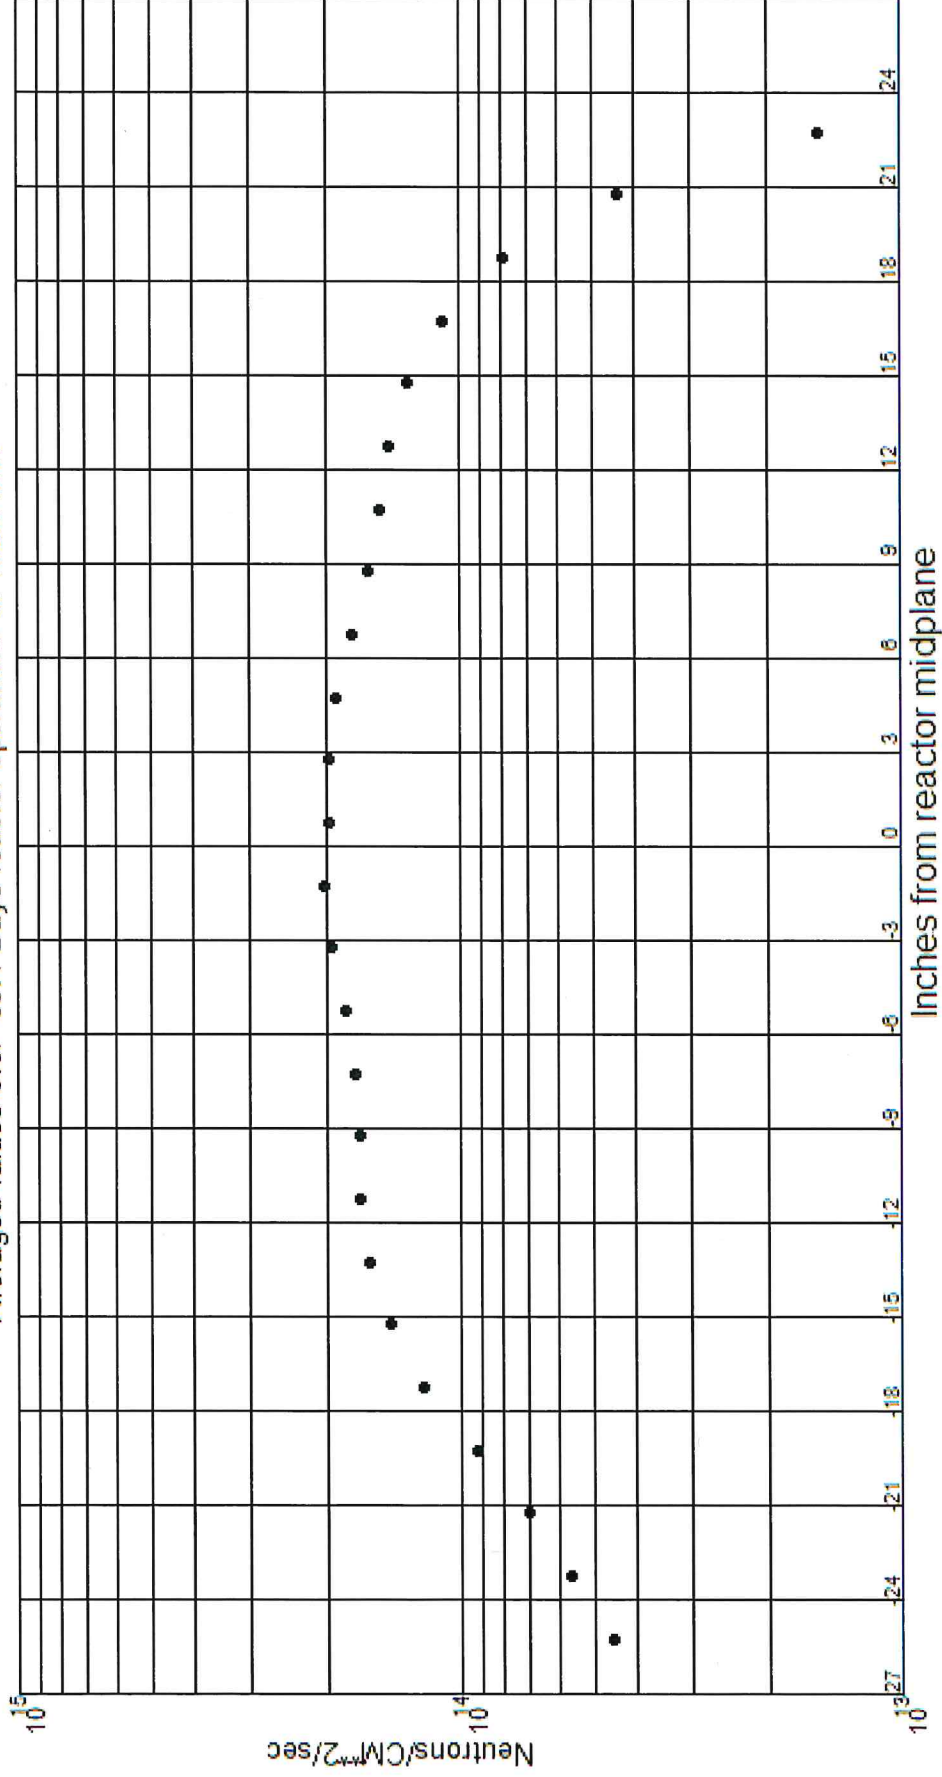

Fast Neutron Fluence Rate (> 1 MeV)


Reactor: ATR
 Cycle: 169A
 Date: 10/30/20-04/23/21
 Monitor No.: SR-250
 Position: SE-2
 Cycle Power: 6773.0 Mwd
 Experiment: 2B-SE
 Material: Nickel
 Average Maximum Fluence Rate: 1.22E+14

Averaged values over 63.4 Days reactor operations at 106.8 MW

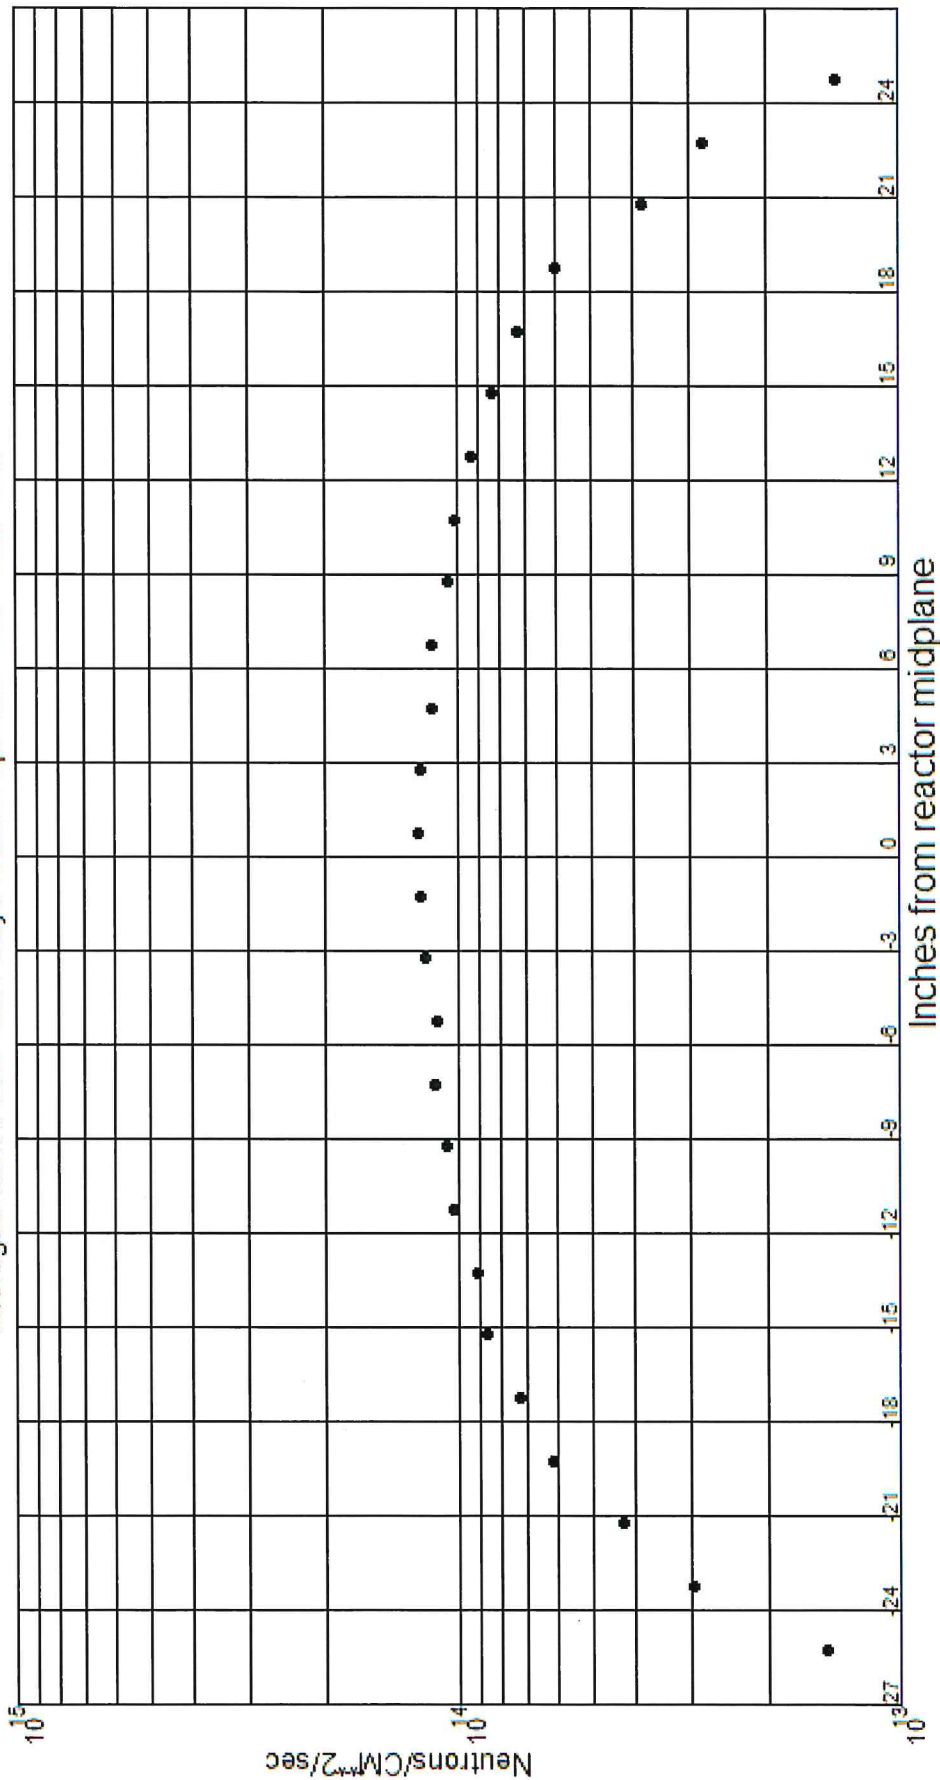

Thermal Neutron Fluence Rate (2200 M/S)


Reactor: ATR
 Cycle: 169A
 Date: 10/30/20-04/23/21
 Monitor No.: SR-251
 Position: SE-3
 Cycle Power: 6773.0 Mwd
 Experiment: 2B-SE
 Material: 0.0976 %CoAl
 Average Maximum Fluence Rate: 2.15E+14
 Averaged values over 63.4 Days reactor operations at 106.8 MW

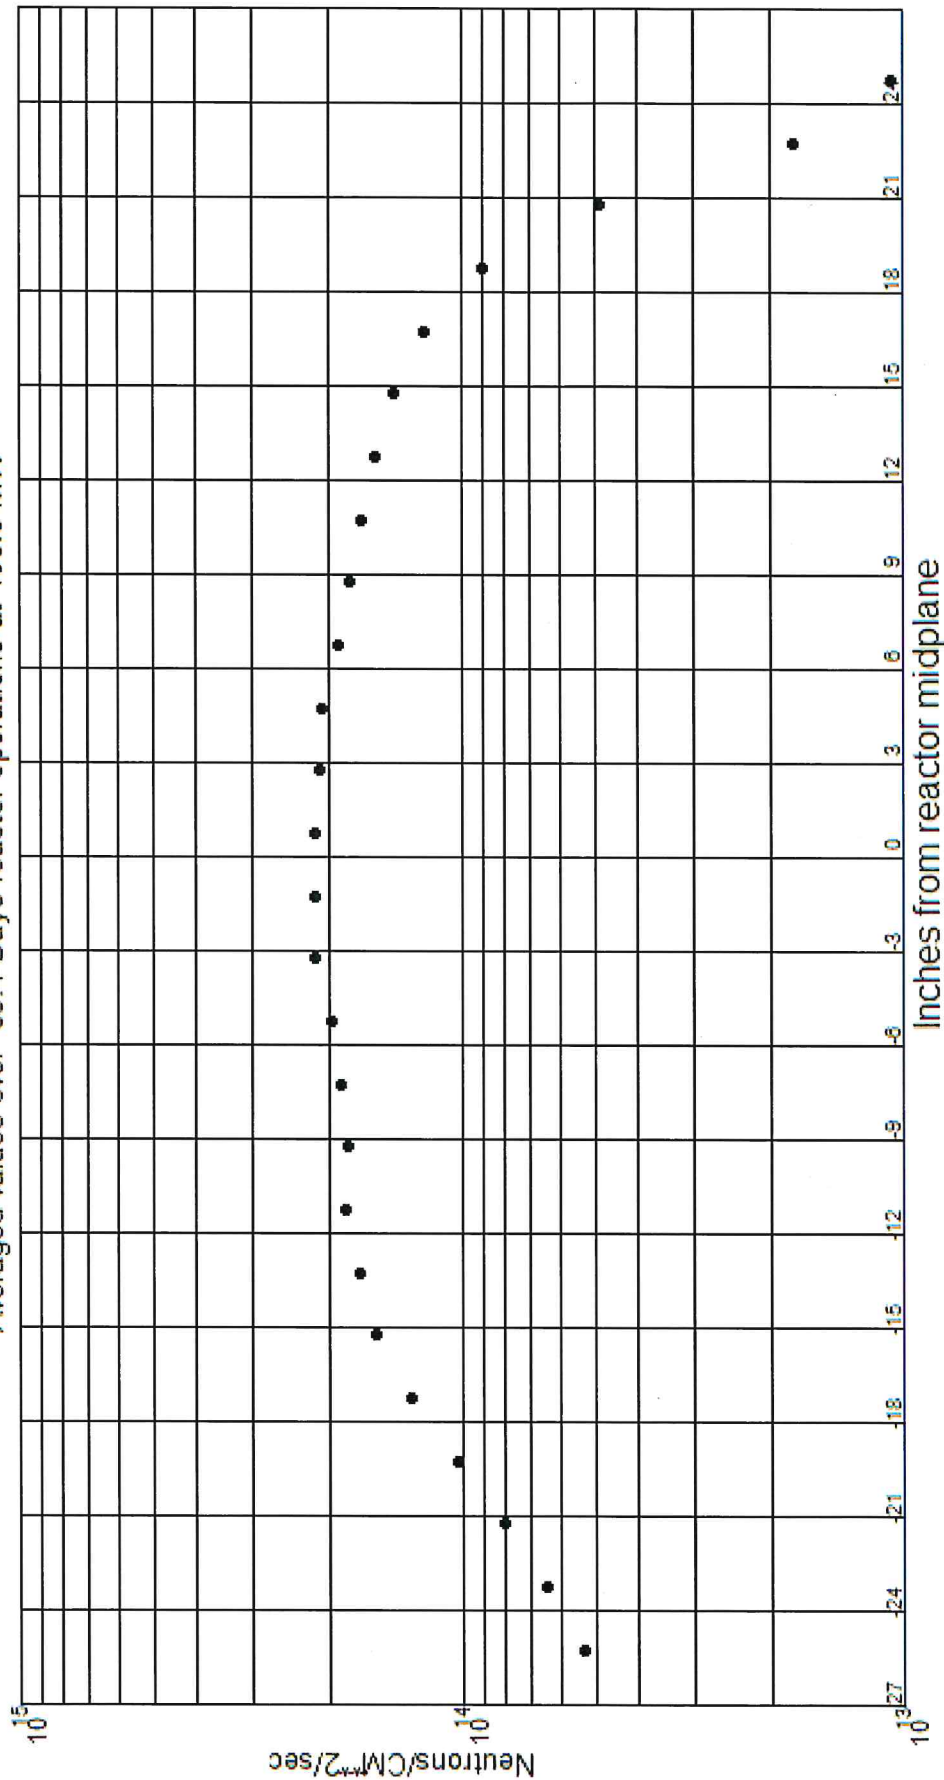

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR
 Monitor No.: SR-251
 Average Maximum Fluence Rate: 1.34E+14
 Cycle: 169A
 Position: SE-3
 Cycle Power: 6773.0 Mw
 Material: Nickel
 Date: 10/30/20-04/23/21
 Experiment: 2B-SE


Averaged values over 63.4 Days reactor operations at 106.8 MW

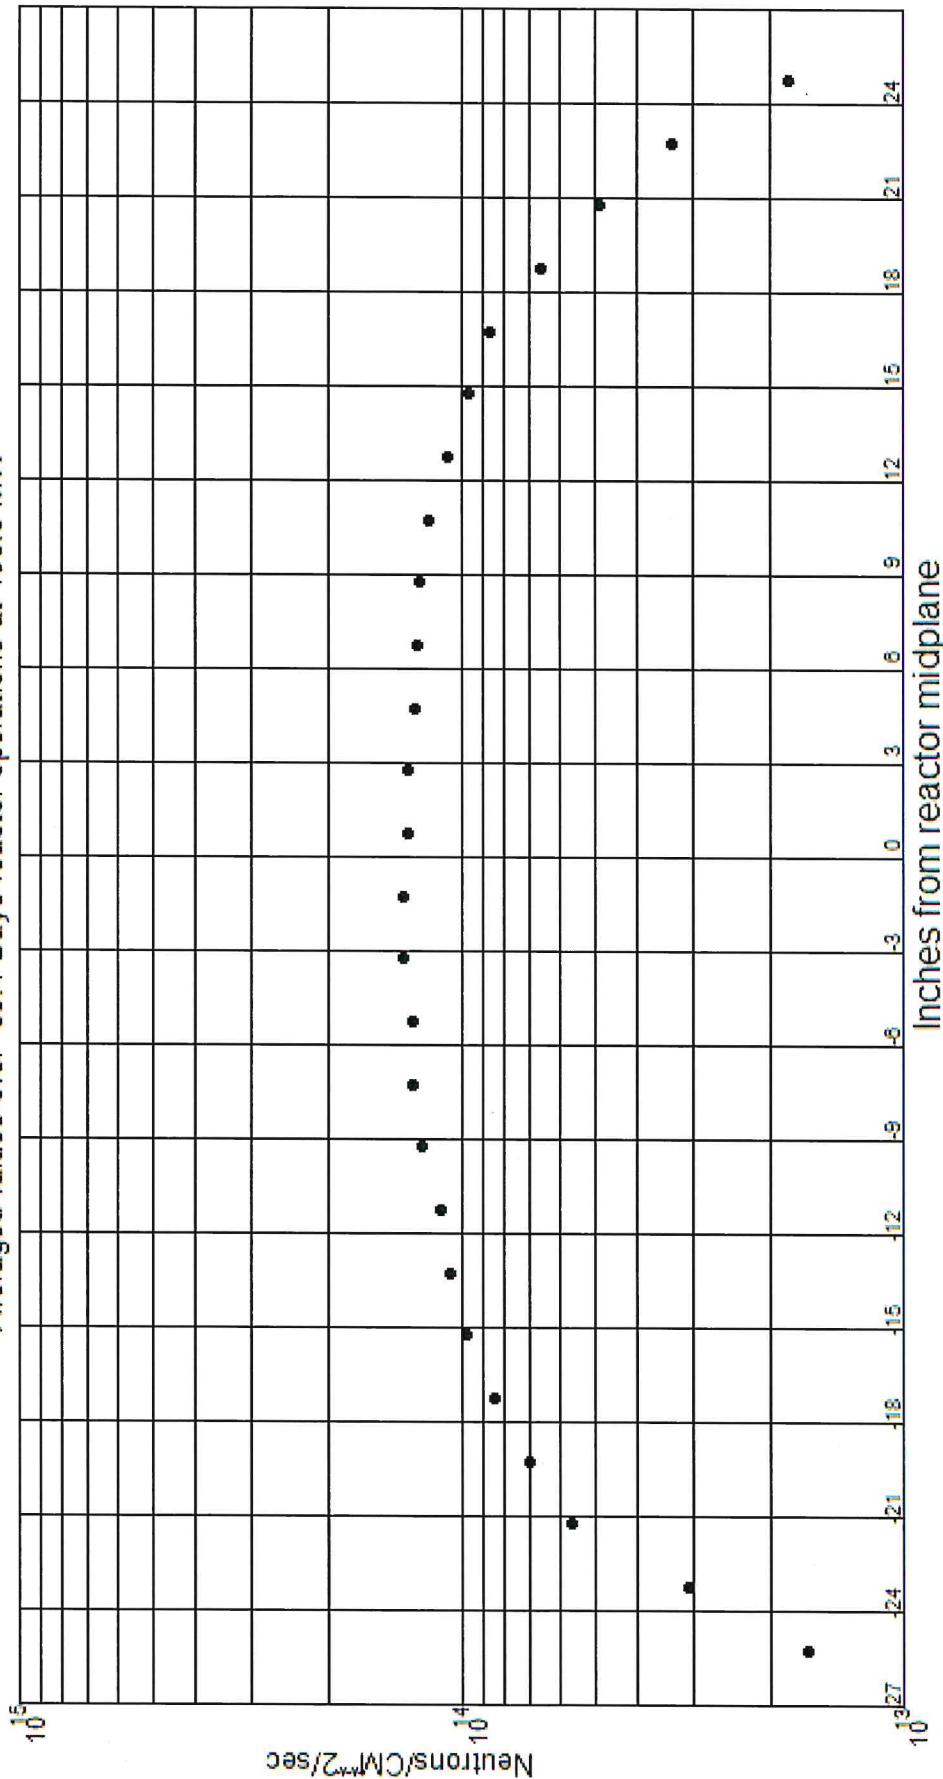

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-252
 Average Maximum Fluence Rate: 2.08E+14
 Cycle: 169A
 Position: SE-4
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 2B-SE

Averaged values over 63.4 Days reactor operations at 106.8 MW

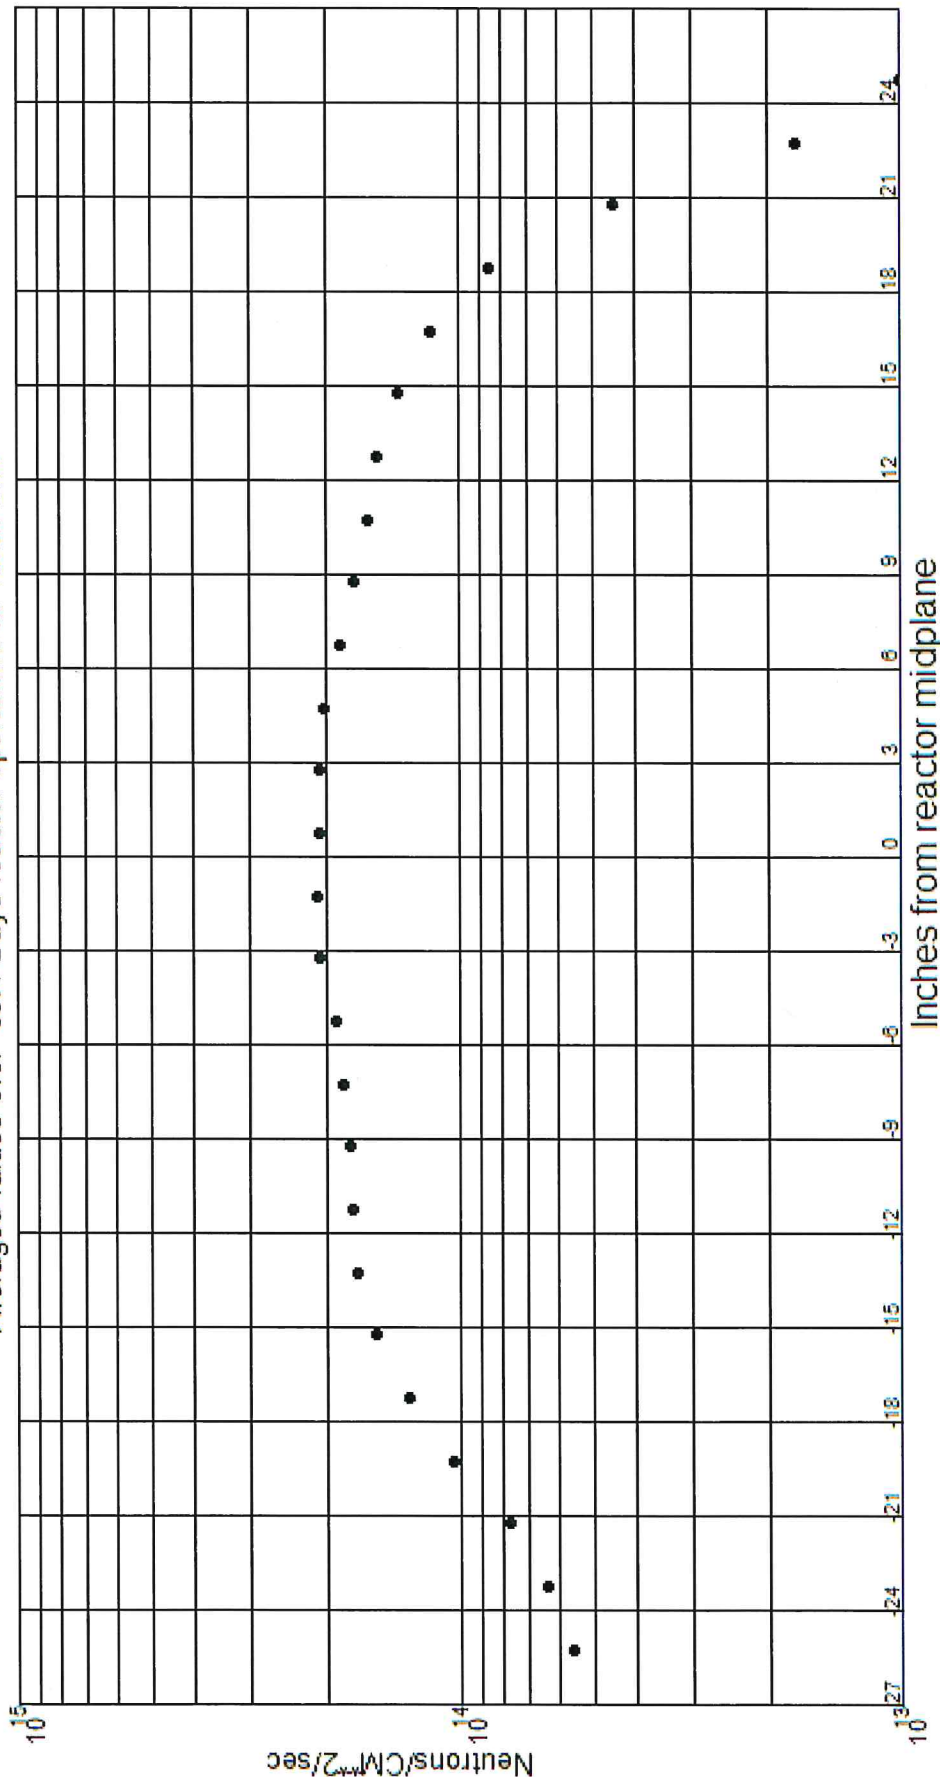

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-252


Position: SE-4

Material: Nickel

Experiment: 2B-SE

Average Maximum Fluence Rate: 1.32E+14


Averaged values over 63.4 Days reactor operations at 106.8 MW

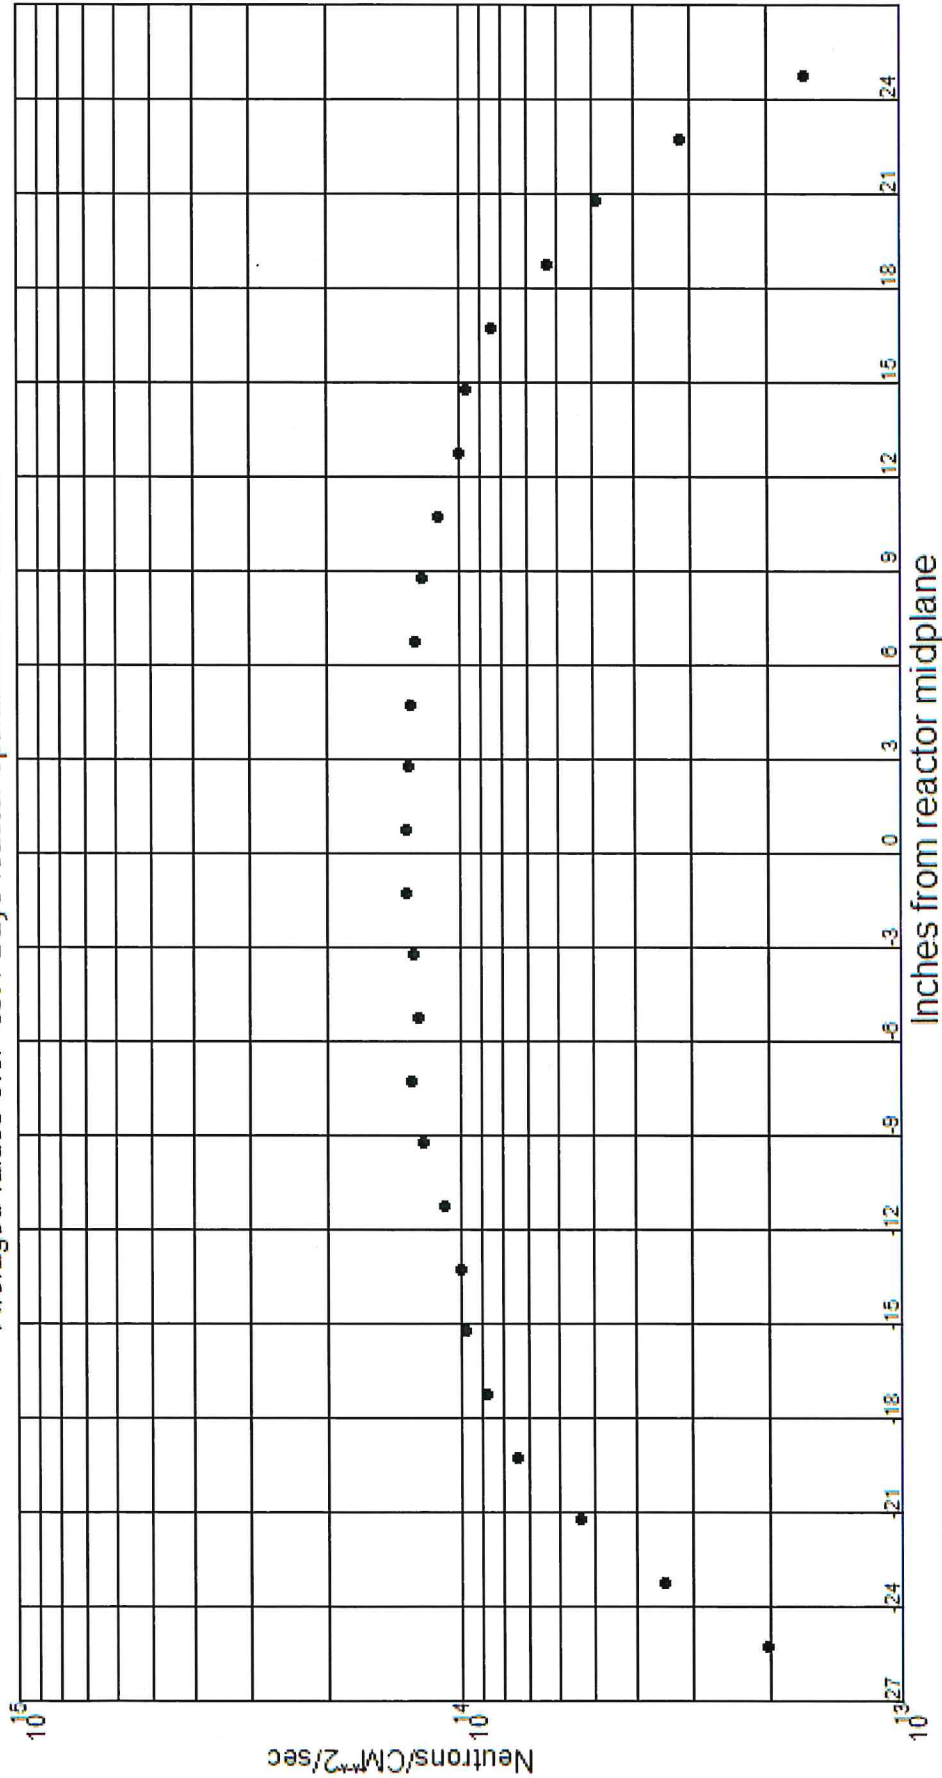

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-253
 Average Maximum Fluence Rate: 2.08E+14
 Cycle: 169A
 Position: SW-1
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 2D-SW


Averaged values over 63.4 Days reactor operations at 106.8 MW

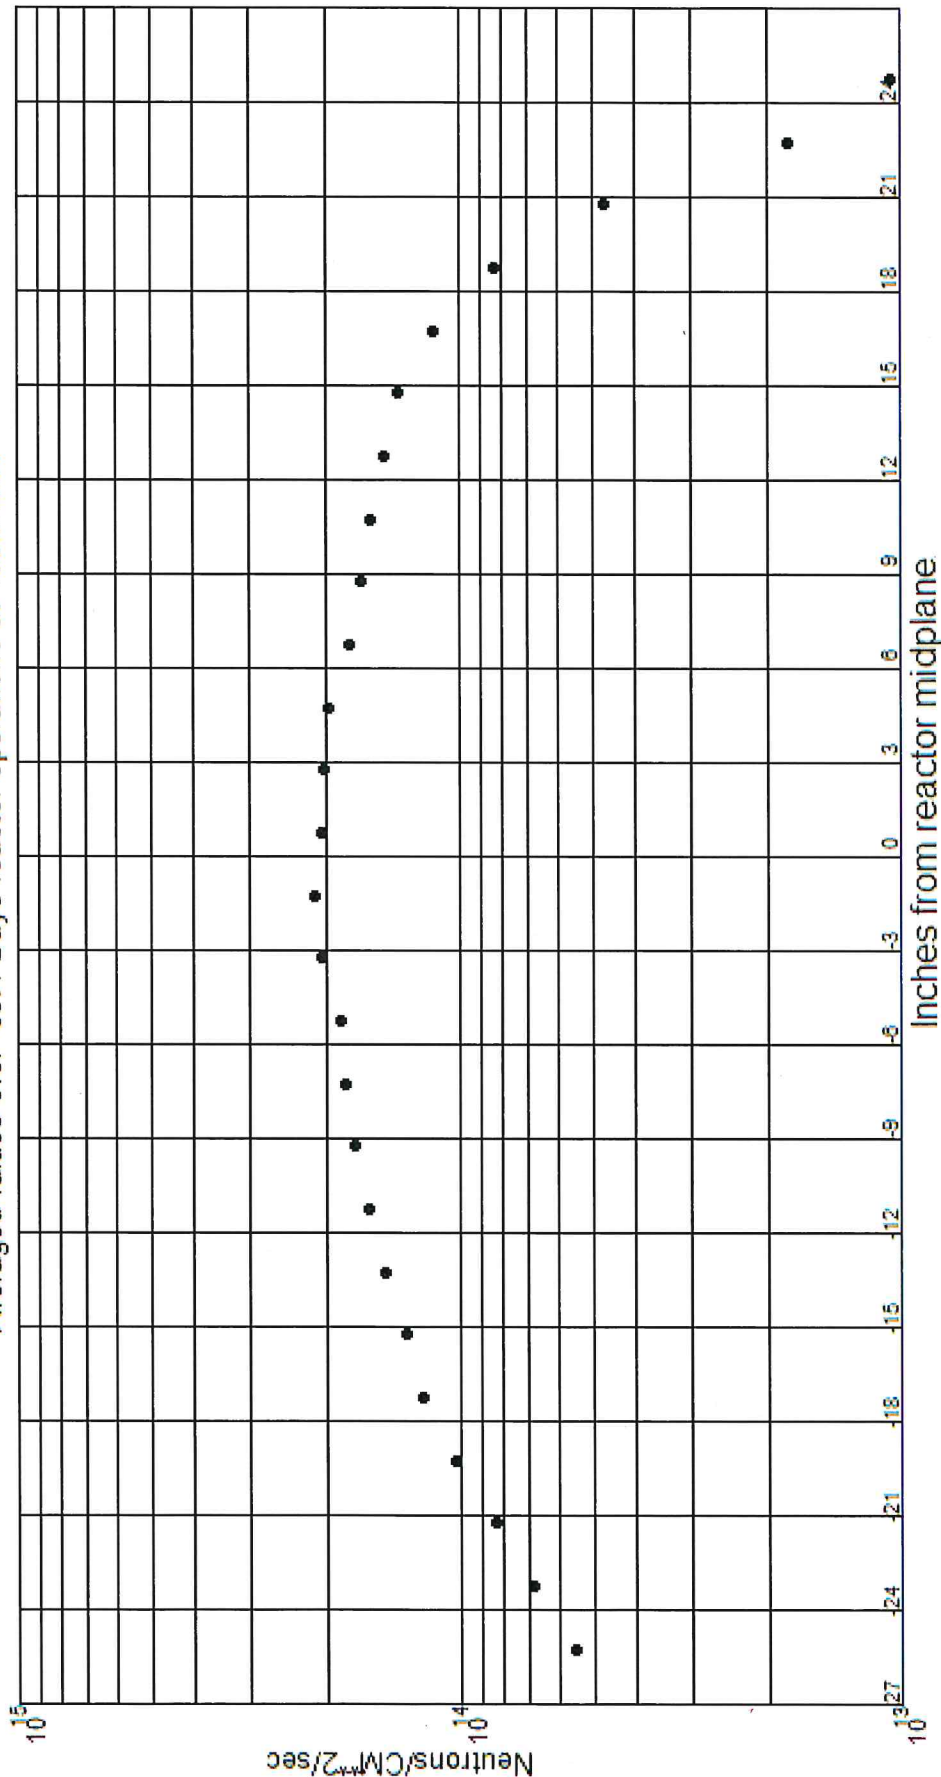

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
 Monitor No.: SR-253 Position: SW-1 Cycle Power: 6773.0 Mwd
 Average Maximum Fluence Rate: 1.32E+14 Material: Nickel Experiment: 2D-SW


Averaged values over 63.4 Days reactor operations at 106.8 MW

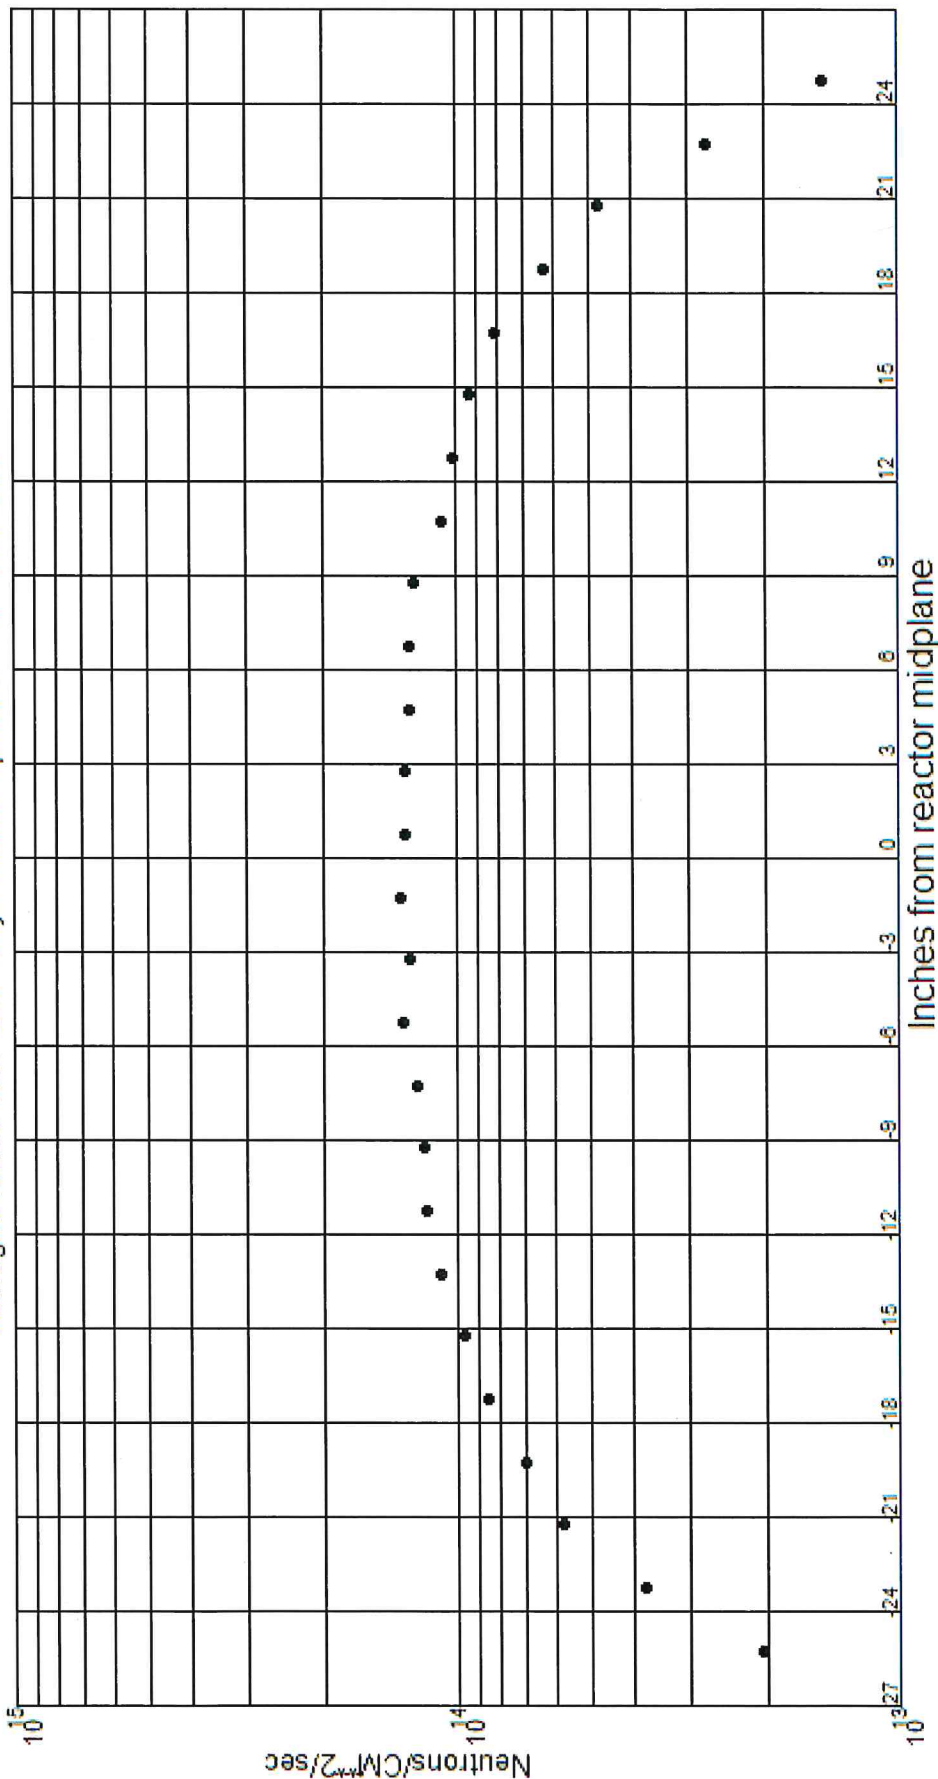

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Cycle: 169A
 Monitor No.: SR-254
 Position: SW-2
 Date: 10/30/20-04/23/21
 Experiment: 2D-SW
 Average Maximum Fluence Rate: 2.07E+14
 Material: 0.0976 %CoAl
 Cycle Power: 6773.0 Mwd


Averaged values over 63.4 Days reactor operations at 106.8 MW

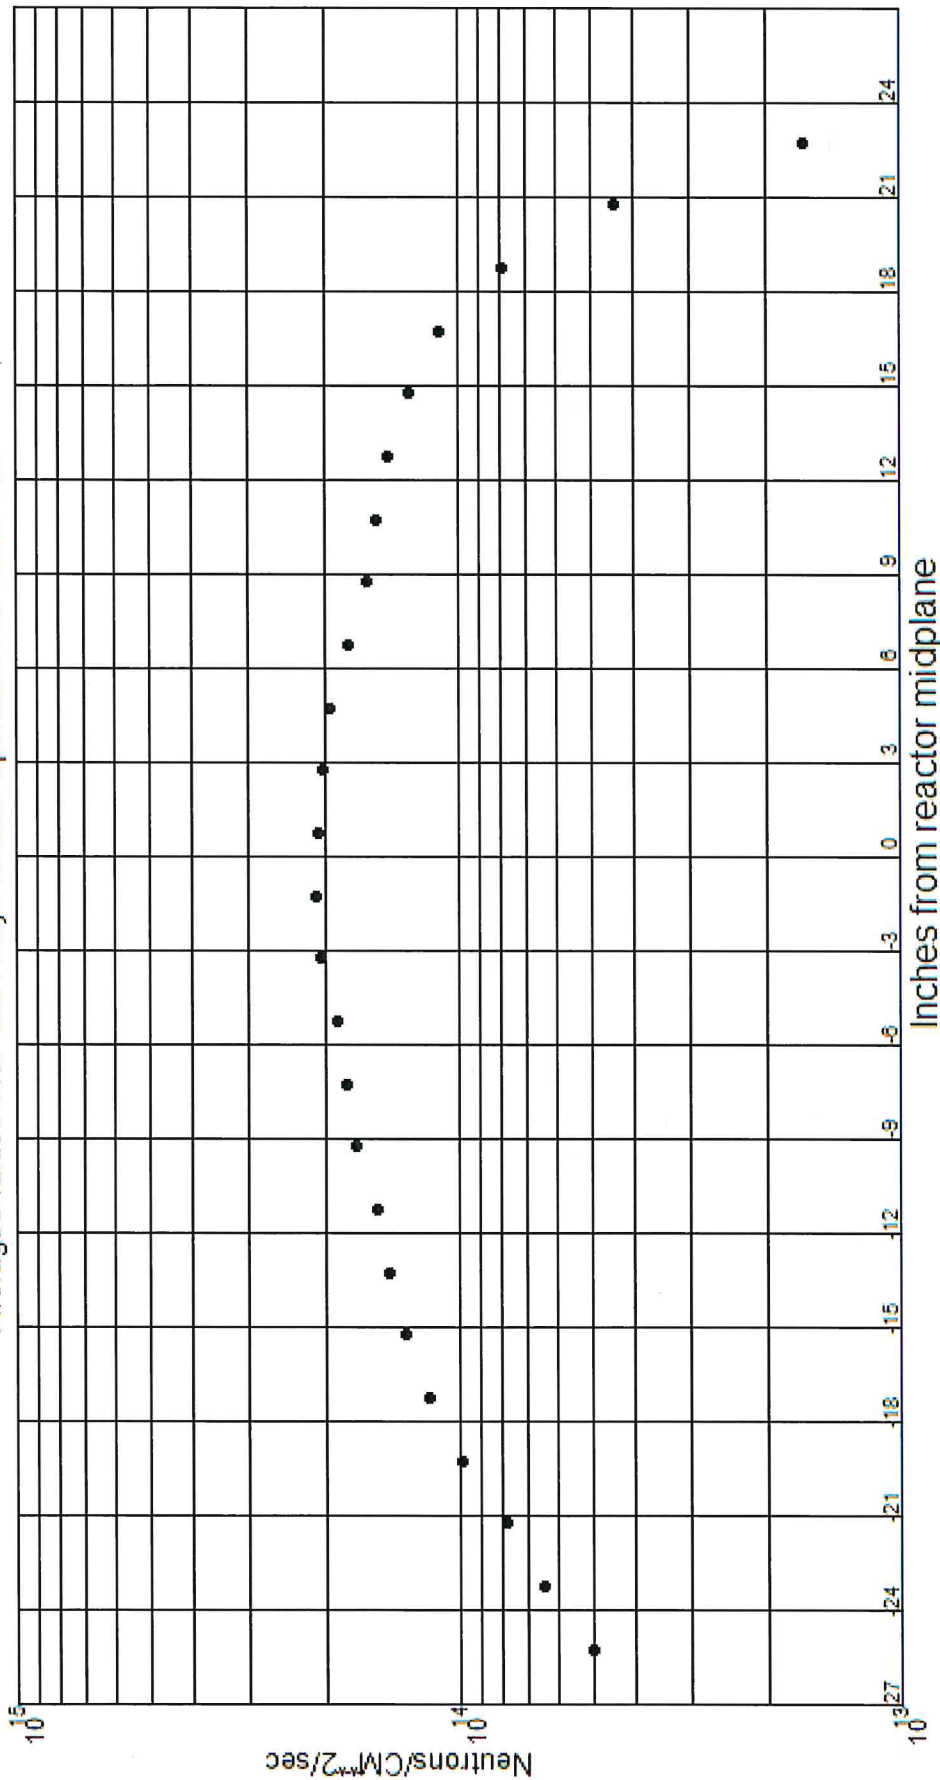

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
Monitor No.: SR-254 Position: SW-2 Cycle Power: 6773.0 Mwd
Average Maximum Fluence Rate: 1.23E+14 Material: Nickel Experiment: 2D-SW


Averaged values over 63.4 Days reactor operations at 106.8 MW

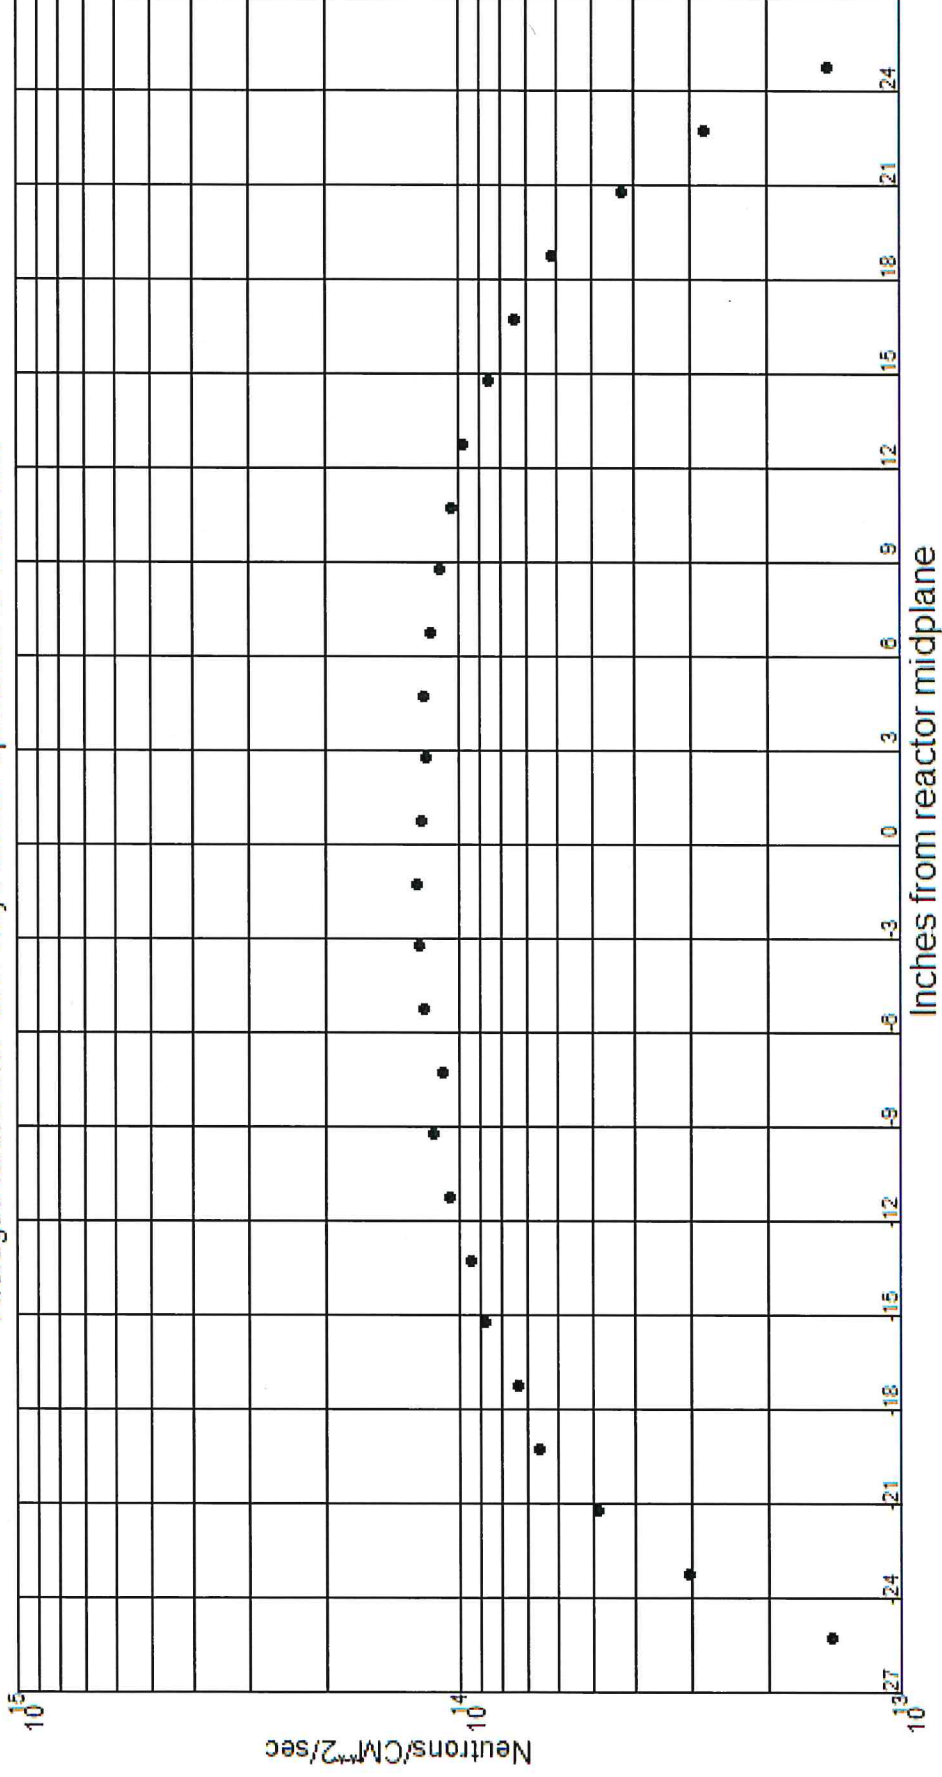

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-255
 Average Maximum Fluence Rate: 1.92E+14
 Cycle: 169A
 Position: SW-3
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 2D-SW

Averaged values over 63.4 Days reactor operations at 106.8 MW

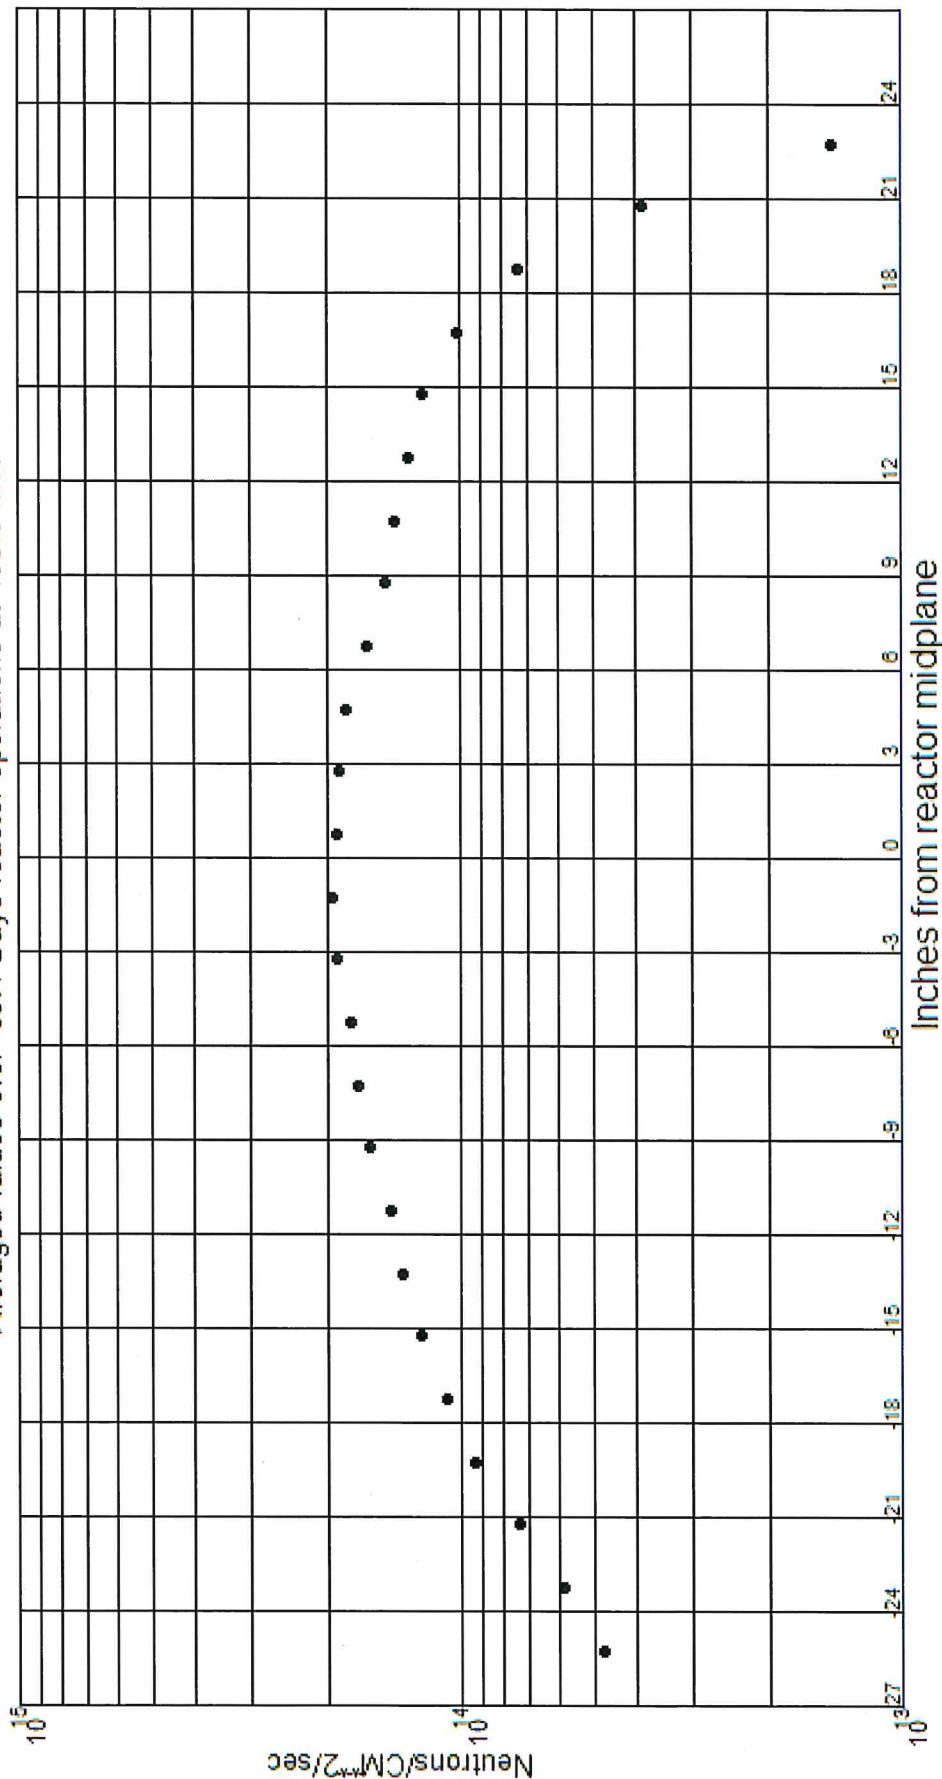

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-255


Position: SW-3

Material: Nickel

Experiment: 2D-SW

Average Maximum Fluence Rate: 1.20E+14


Averaged values over 63.4 Days reactor operations at 106.8 MW

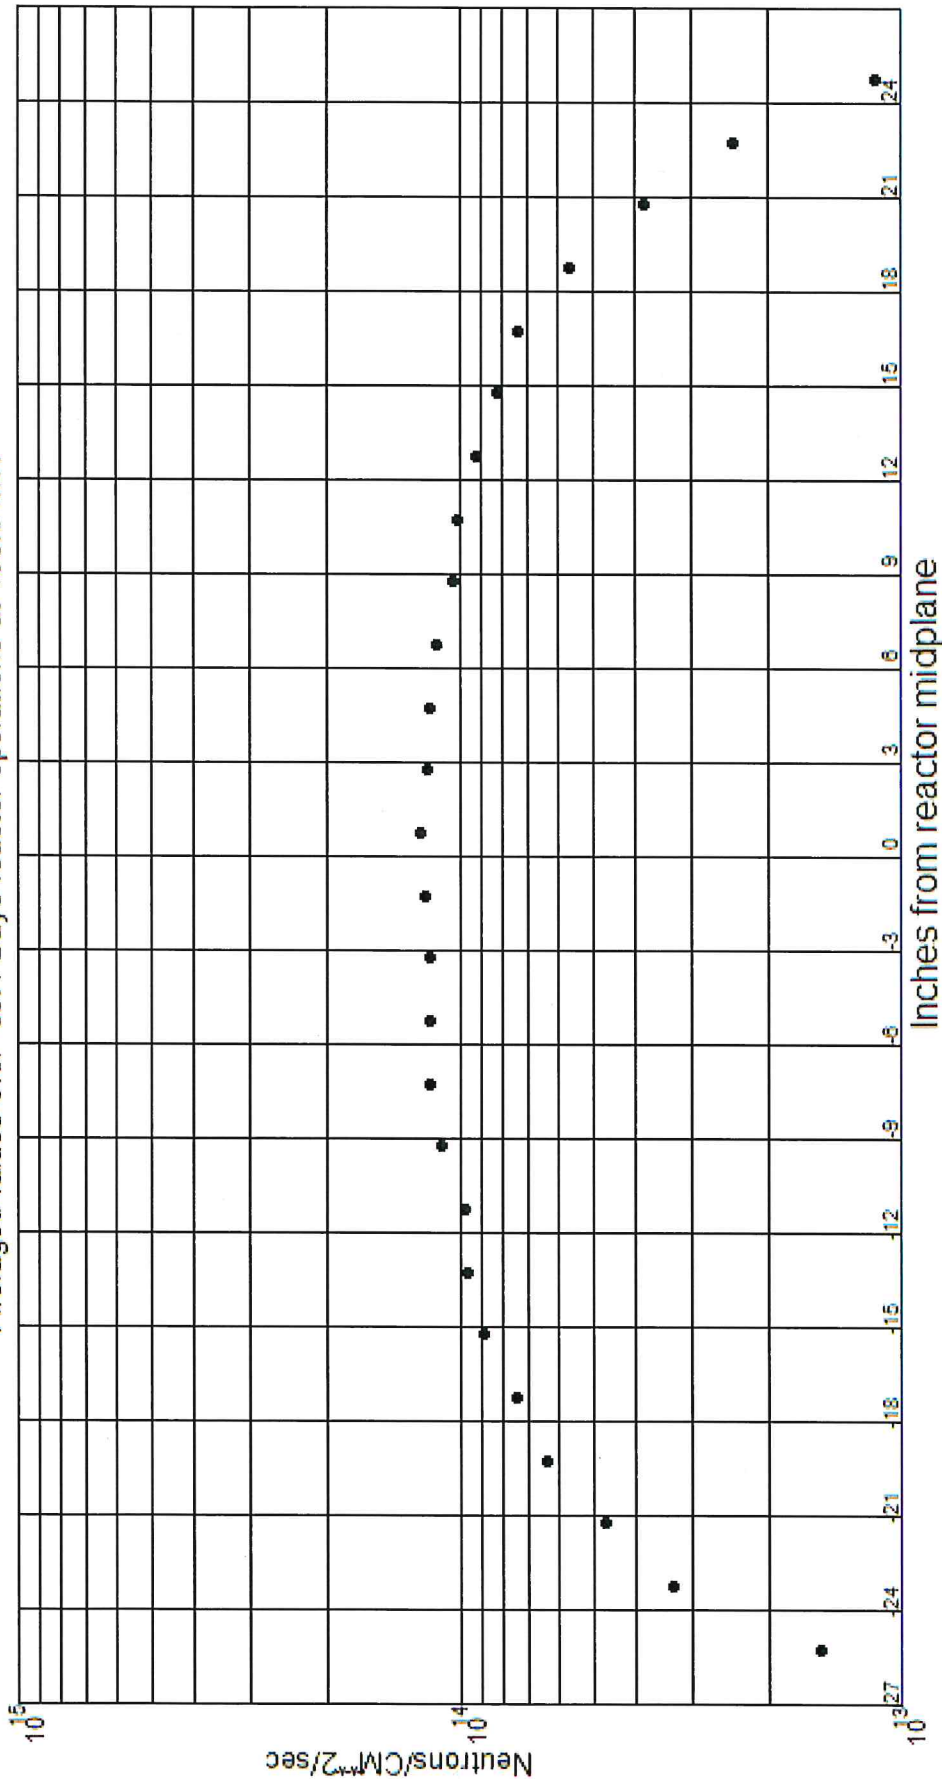

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-256
 Average Maximum Fluence Rate: 1.93E+14
 Cycle: 169A
 Position: SW-4
 Cycle Power: 6773.0 Mwd
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 2D-SW


Averaged values over 63.4 Days reactor operations at 106.8 MW

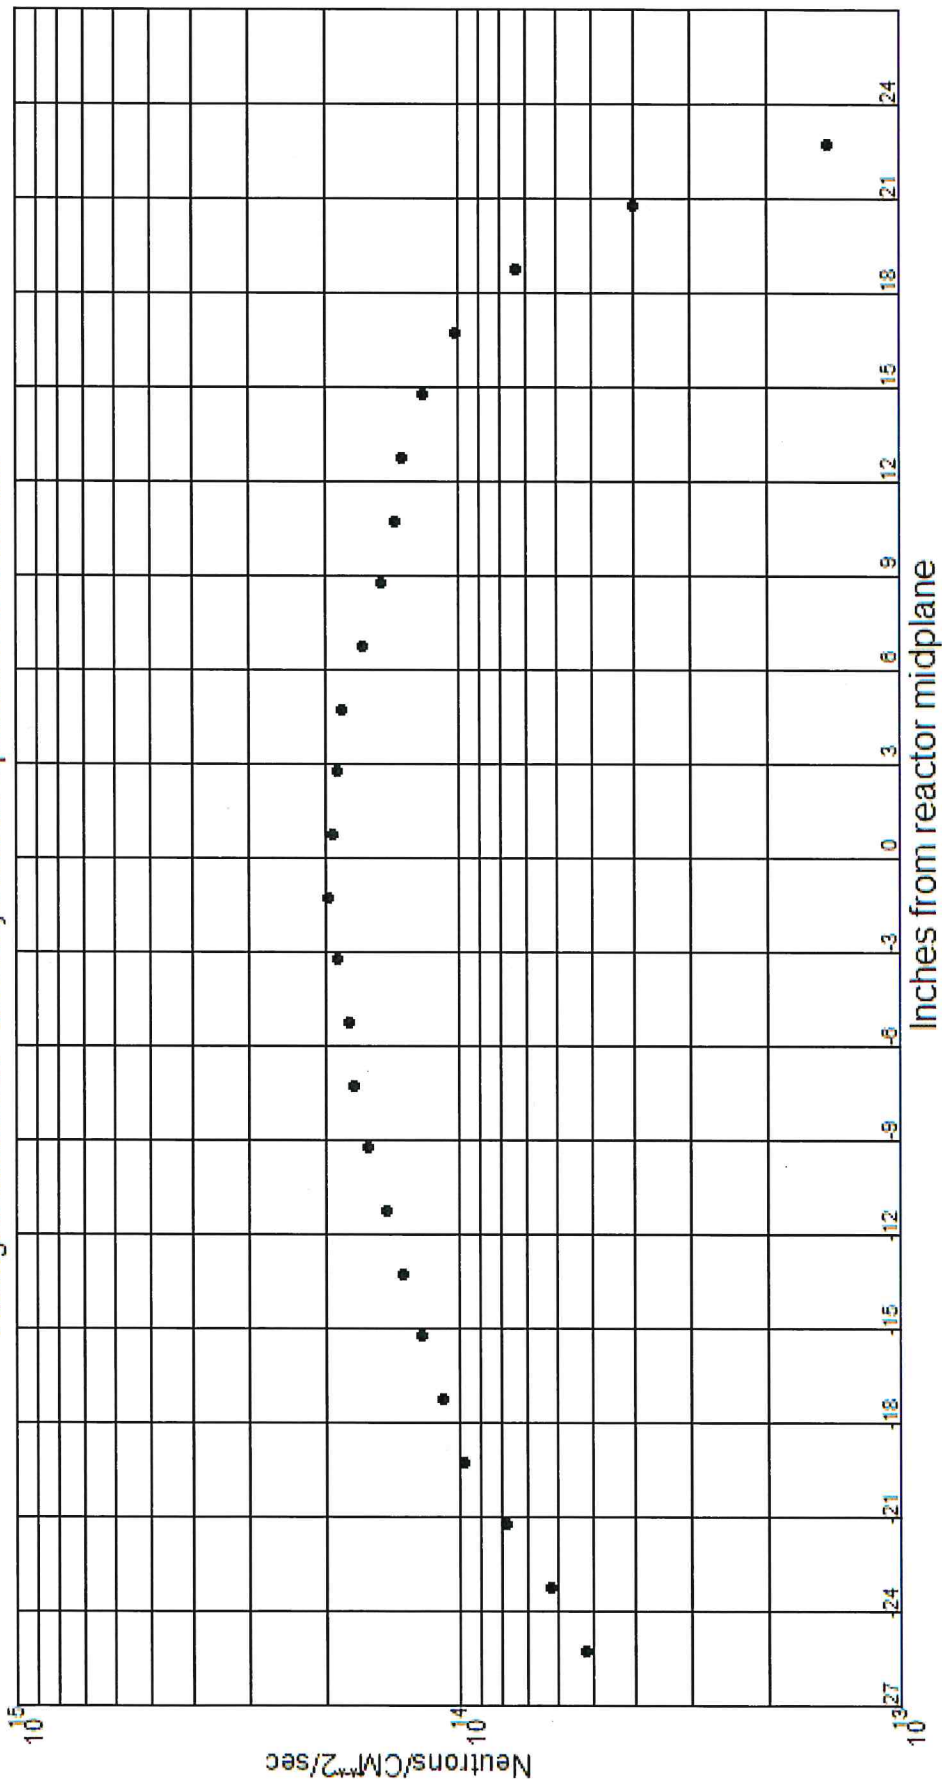

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR Cycle: 169A Date: 10/30/20-04/23/21
 Monitor No.: SR-256 Position: SW-4 Cycle Power: 6773.0 Mwd
 Average Maximum Fluence Rate: 1.37E+14 Material: Nickel Experiment: 2D-SW


Averaged values over 63.4 Days reactor operations at 106.8 MW

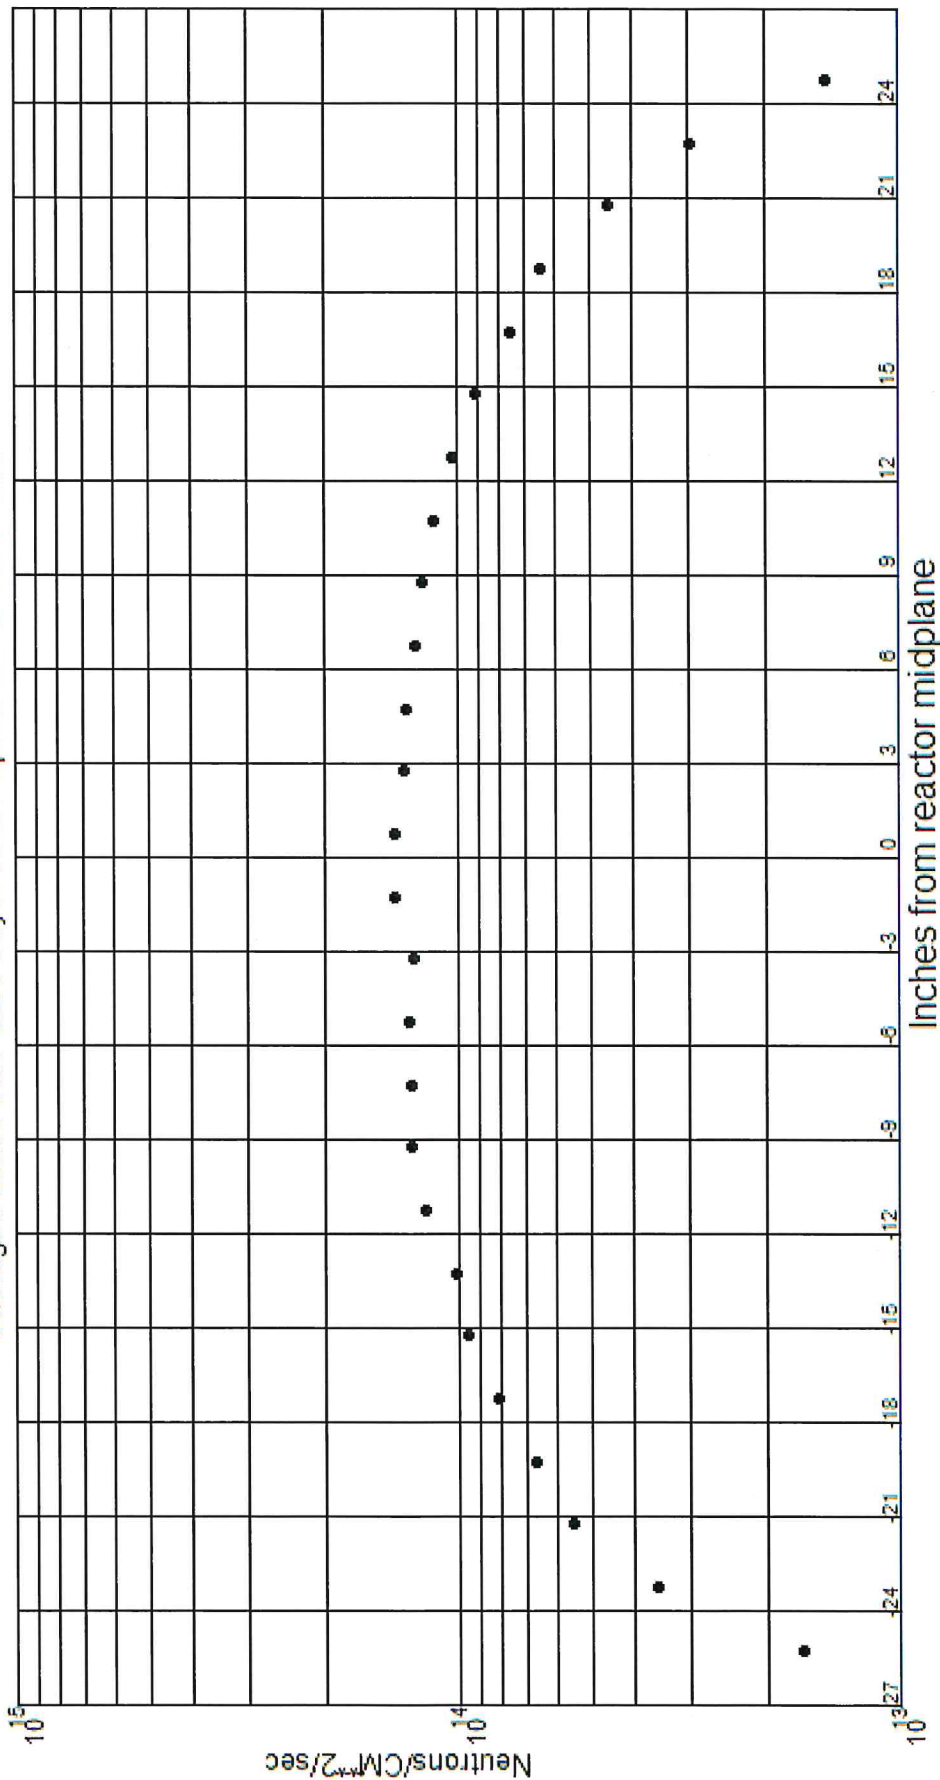

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-257
 Average Maximum Fluence Rate: 2.32E+14
 Cycle: 169A
 Position: W-1
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 1C-W

Averaged values over 63.4 Days reactor operations at 106.8 MW

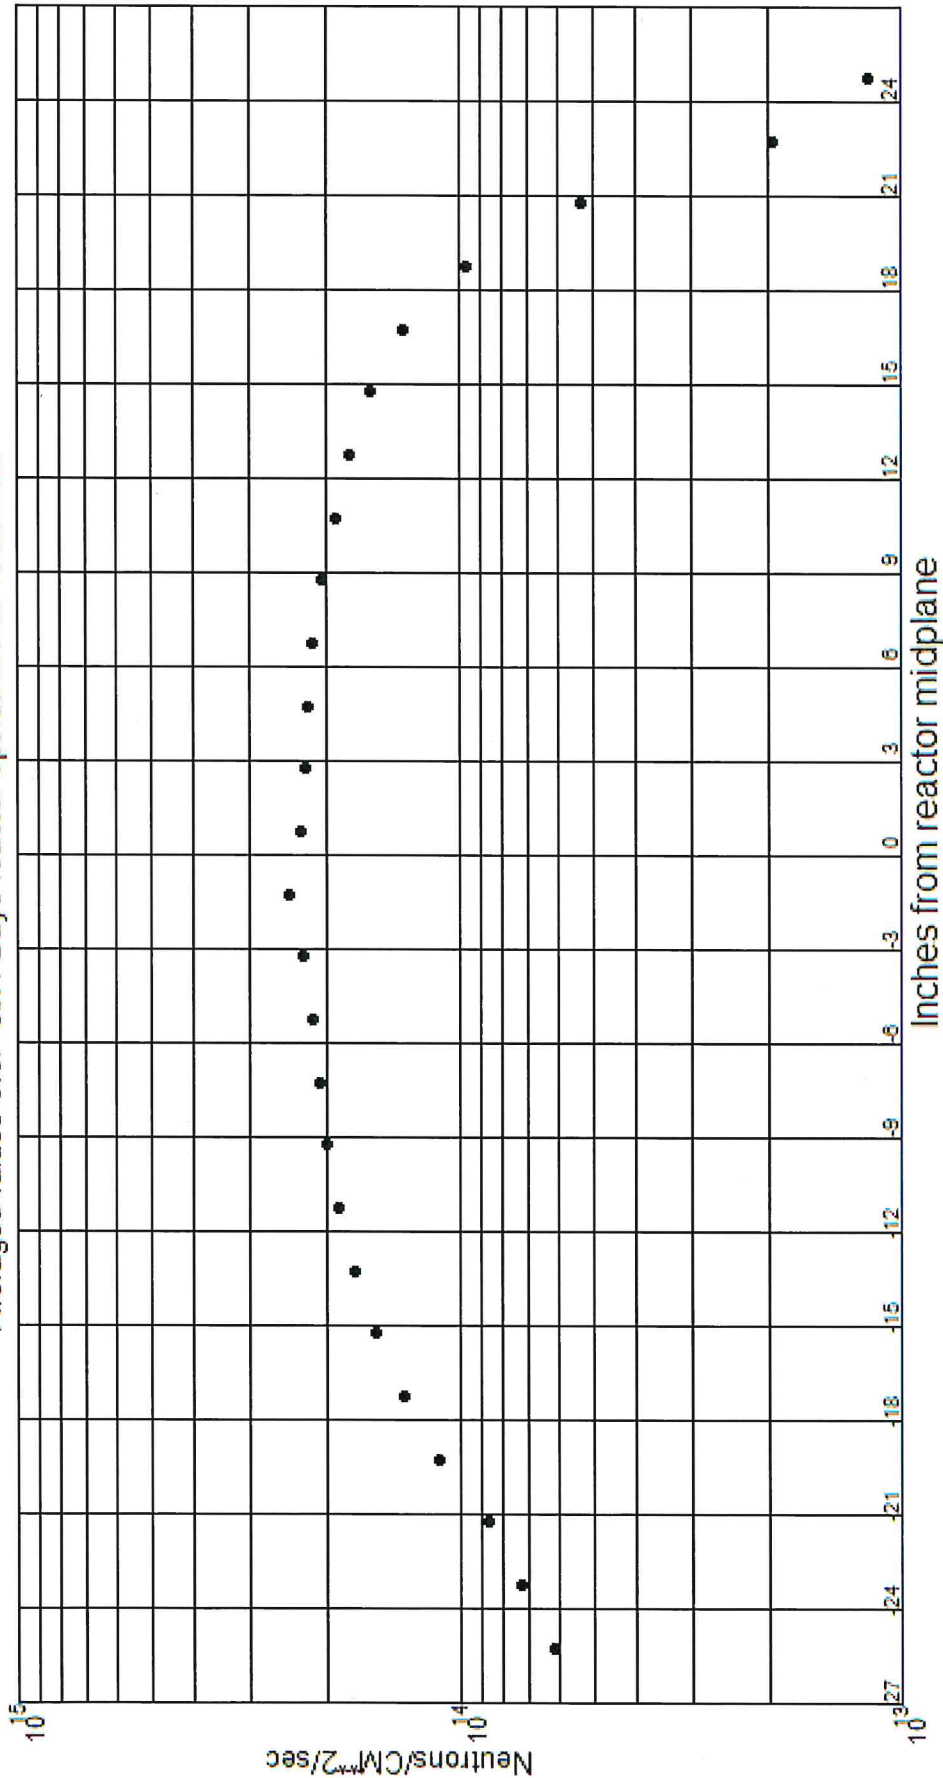

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Date: 10/30/20-04/23/21

Monitor No.: SR-257

Position: W-1


Cycle Power: 6773.0 Mwd

Experiment: 1C-W

Average Maximum Fluence Rate: 1.18E+14

Material: Nickel


Averaged values over 63.4 Days reactor operations at 106.8 MW

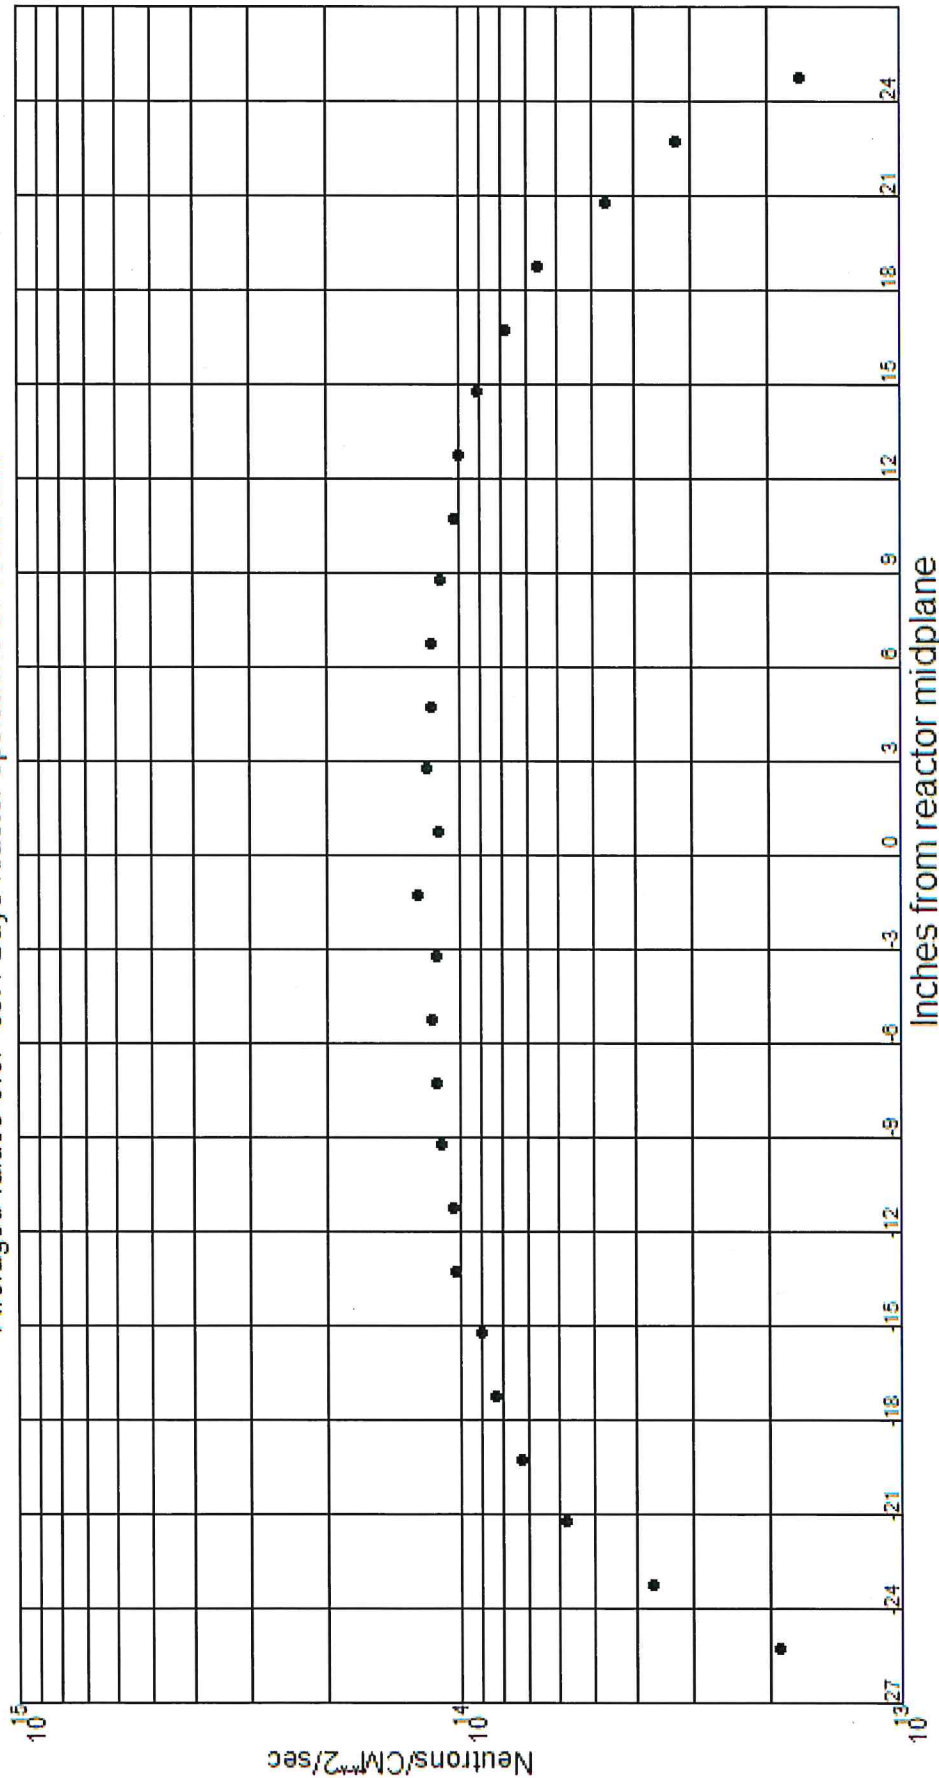

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-258
 Average Maximum Fluence Rate: 2.29E+14
 Cycle: 169A
 Position: W-2
 Cycle Power: 6773.0 Mw
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 1C-W

Averaged values over 63.4 Days reactor operations at 106.8 MW

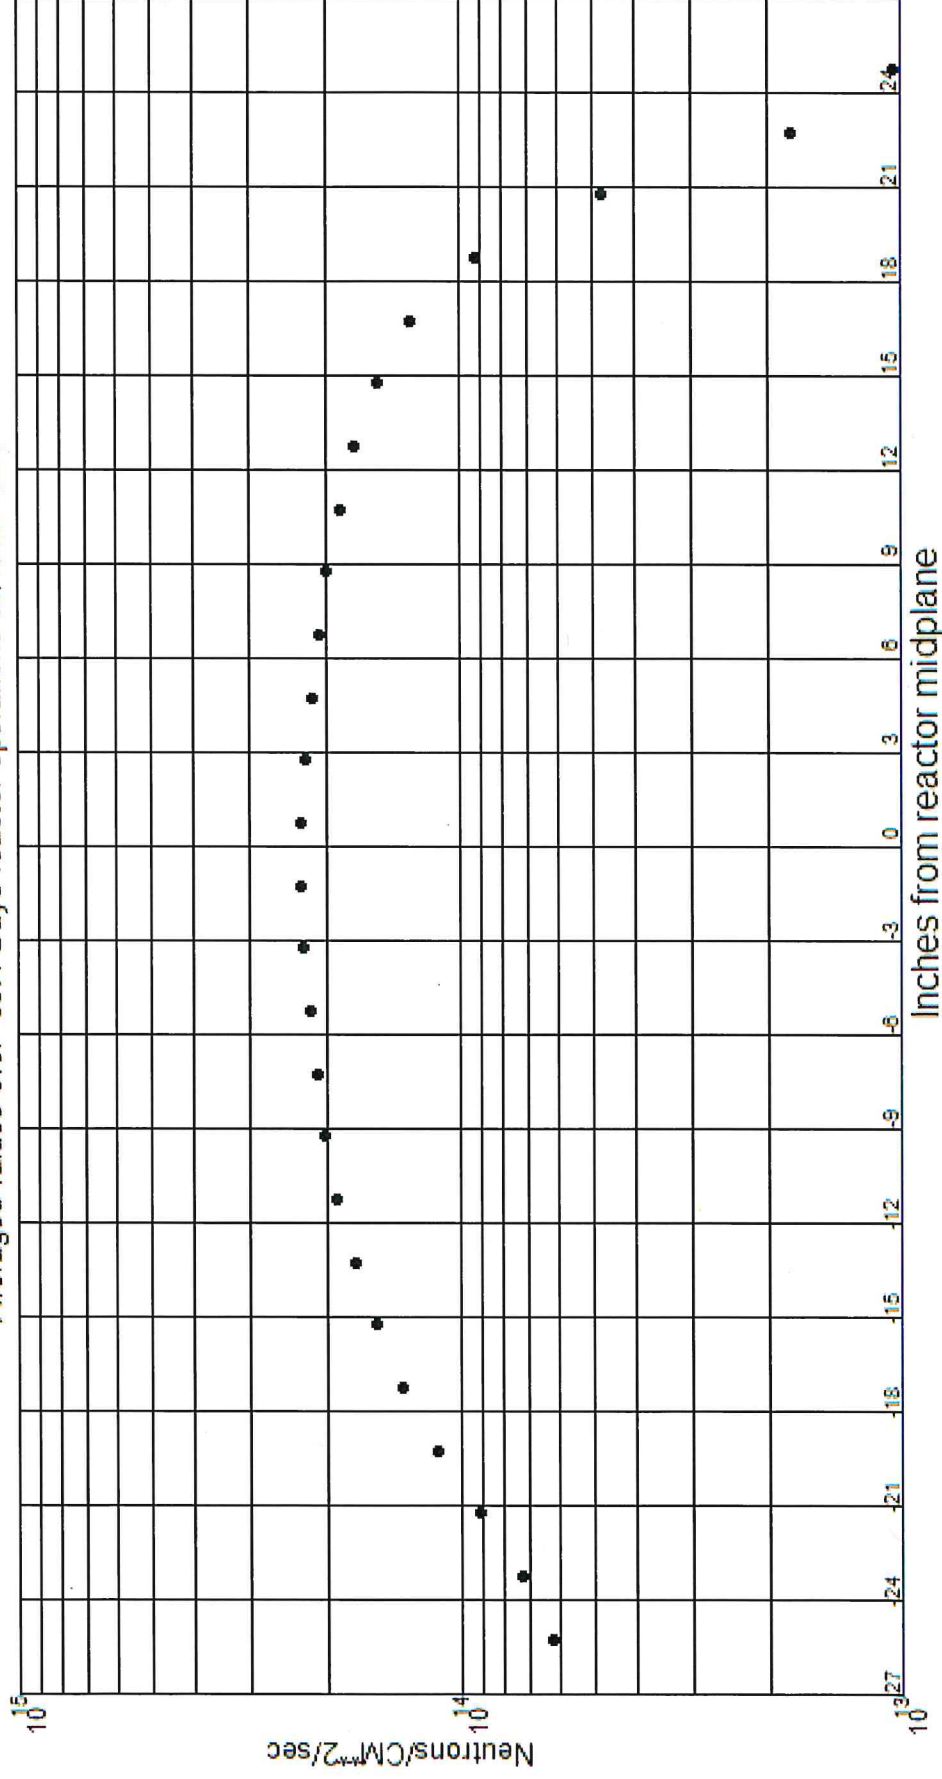

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-258


Position: W-2

Material: Nickel

Experiment: 1C-W

Average Maximum Fluence Rate: 1.29E+14

Averaged values over 63.4 Days reactor operations at 106.8 MW

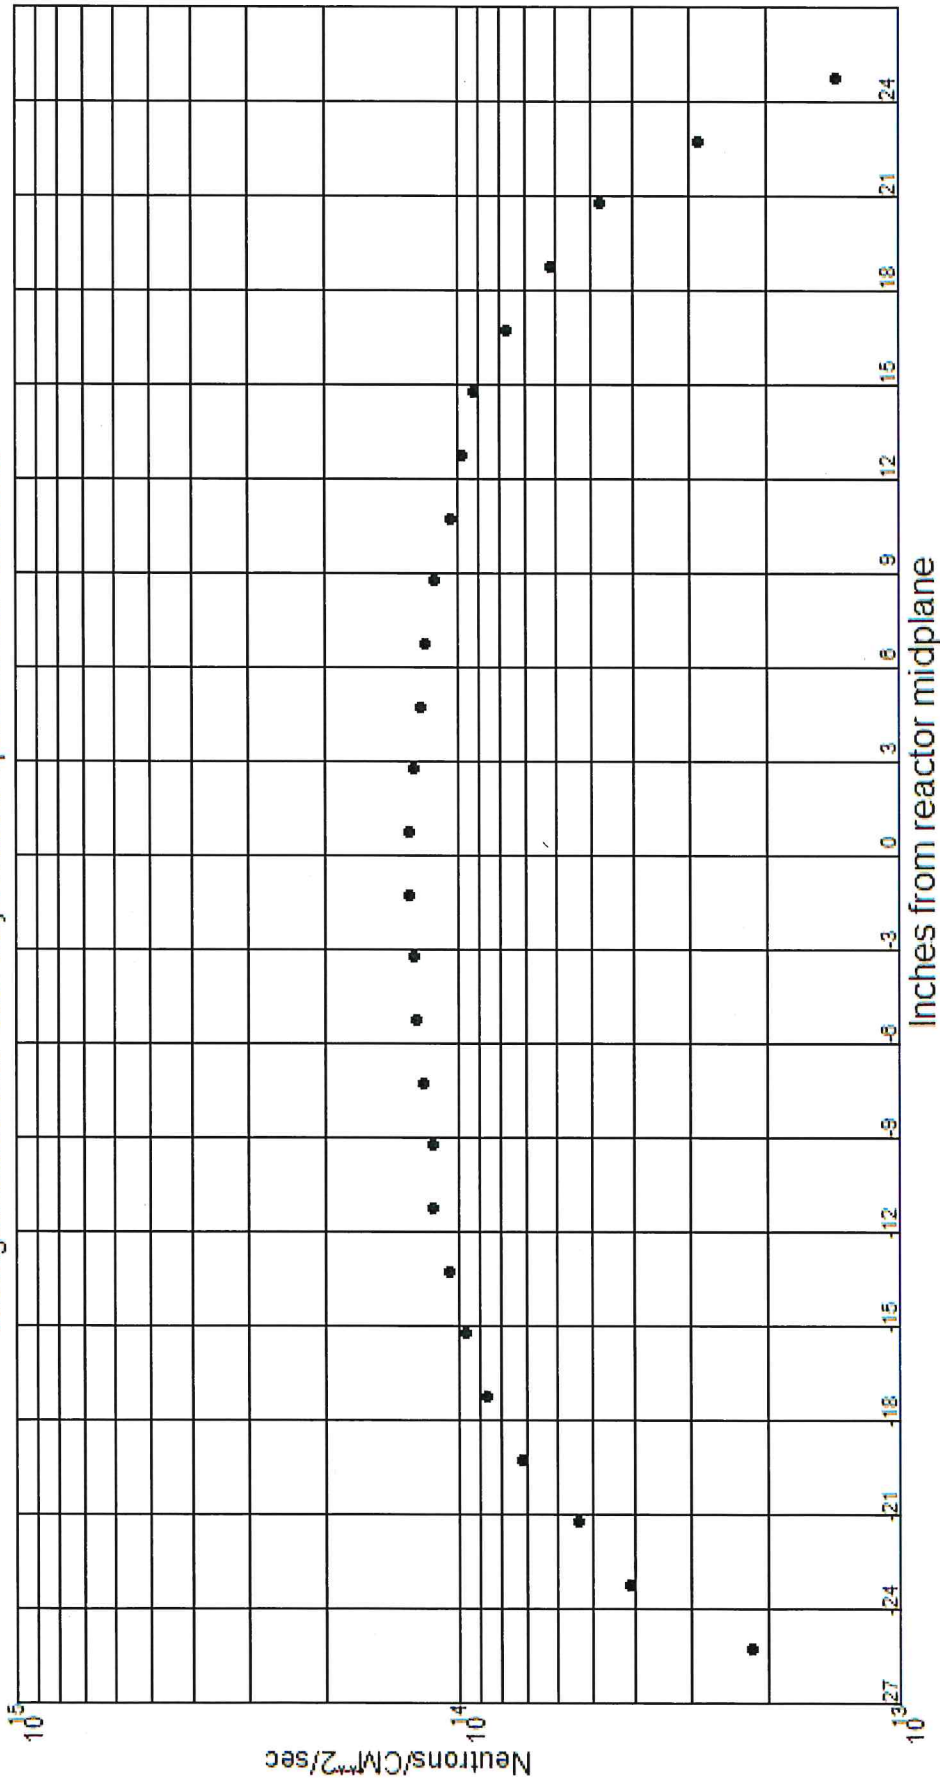

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-259


Position: W-3

Material: 0.0976 %CoAl

Experiment: 1C-W

Average Maximum Fluence Rate: 2.42E+14

Averaged values over 63.4 Days reactor operations at 106.8 MW

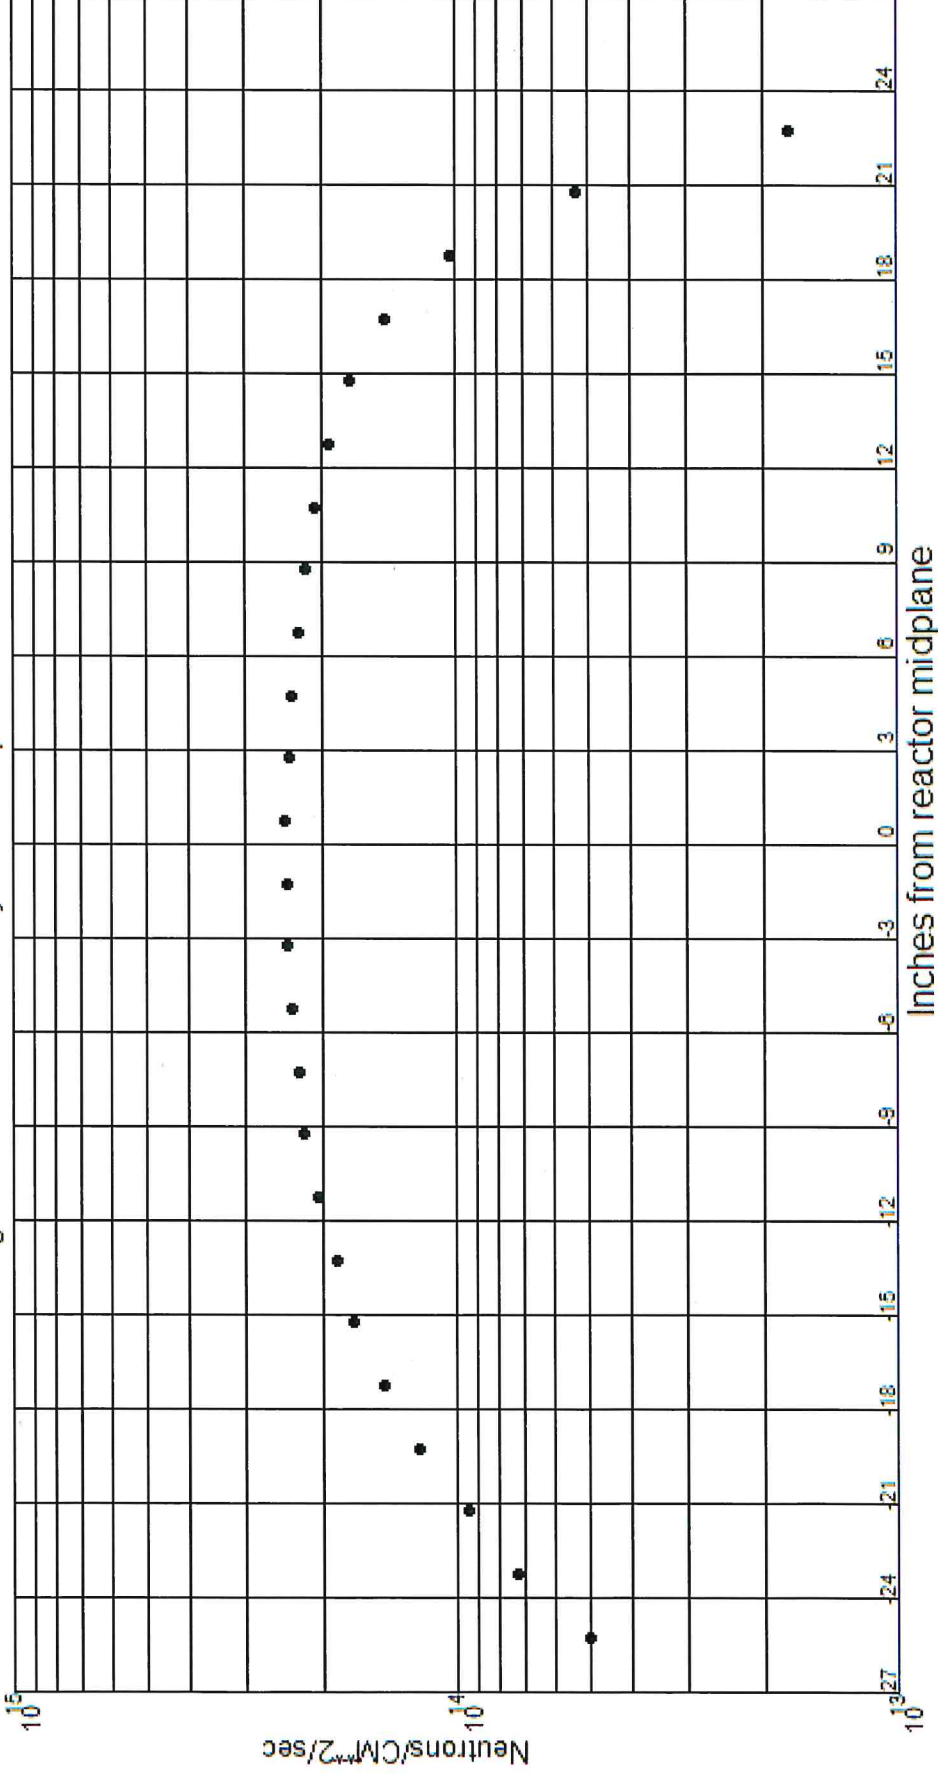

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Cycle Power: 6773.0 Mwd

Date: 10/30/20-04/23/21

Monitor No.: SR-259


Position: W-3

Material: Nickel

Experiment: 1C-W

Average Maximum Fluence Rate: 6.52E+13


Averaged values over 63.4 Days reactor operations at 106.8 MW

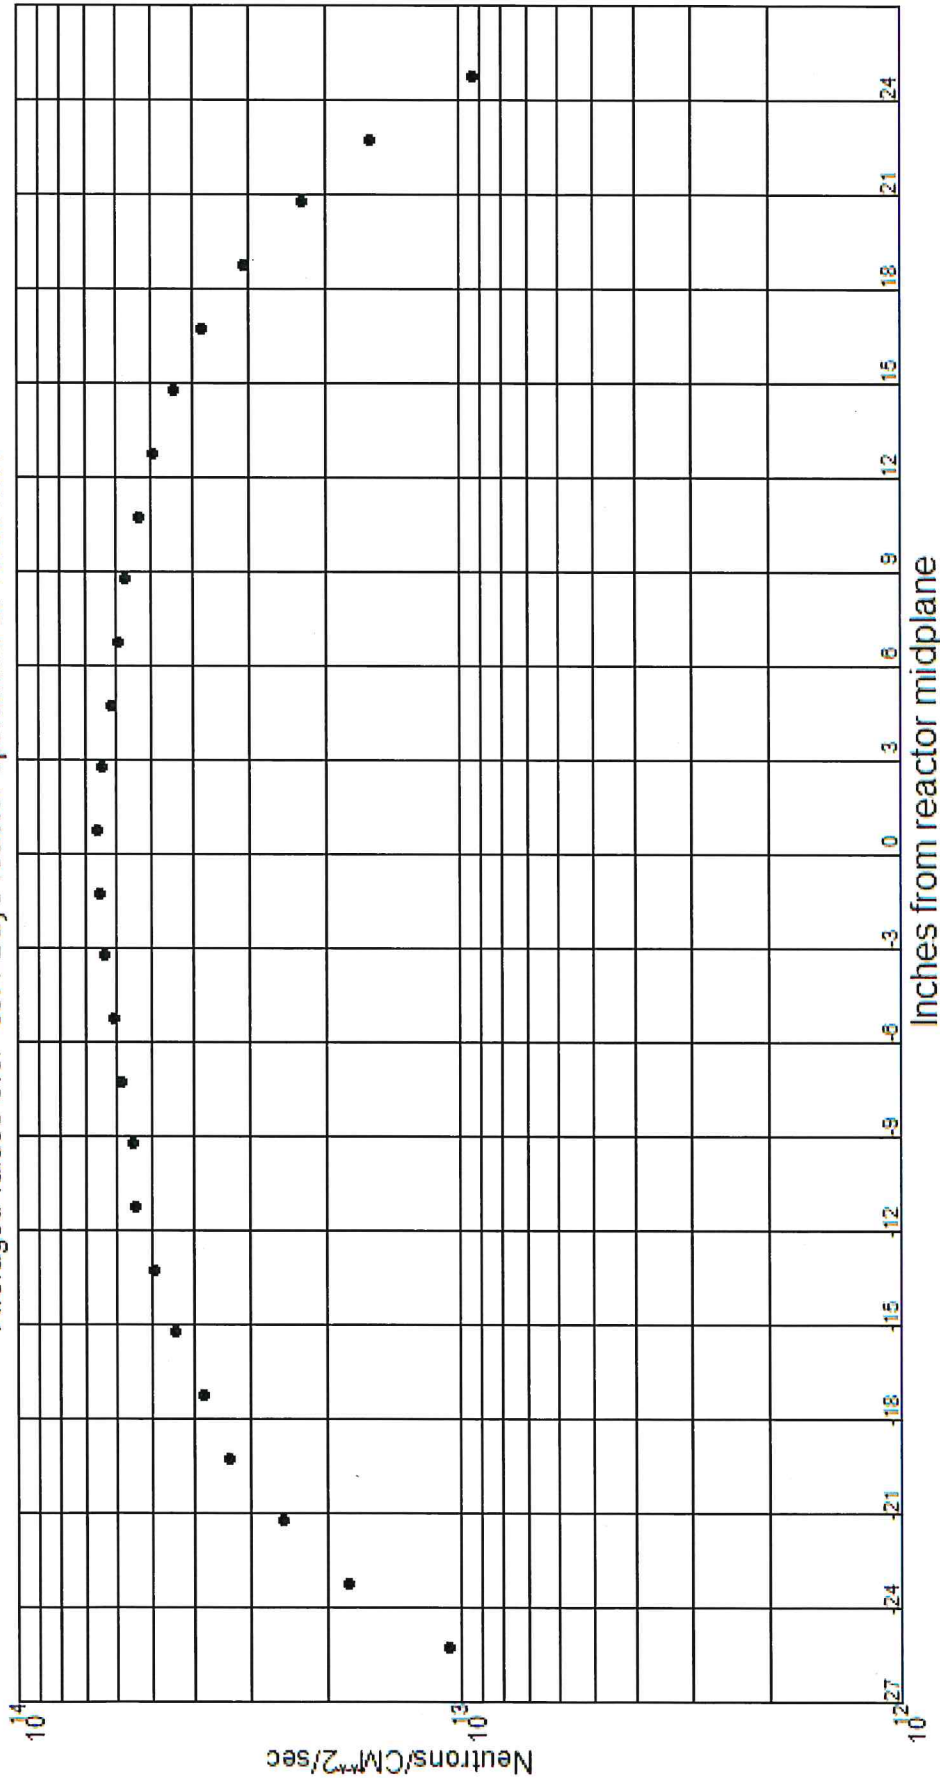

Thermal Neutron Fluence Rate (2200 M/S)

Reactor: ATR
 Monitor No.: SR-260
 Average Maximum Fluence Rate: 2.40E+14
 Cycle: 169A
 Position: W-4
 Material: 0.0976 %CoAl
 Date: 10/30/20-04/23/21
 Experiment: 1C-W

Averaged values over 63.4 Days reactor operations at 106.8 MW

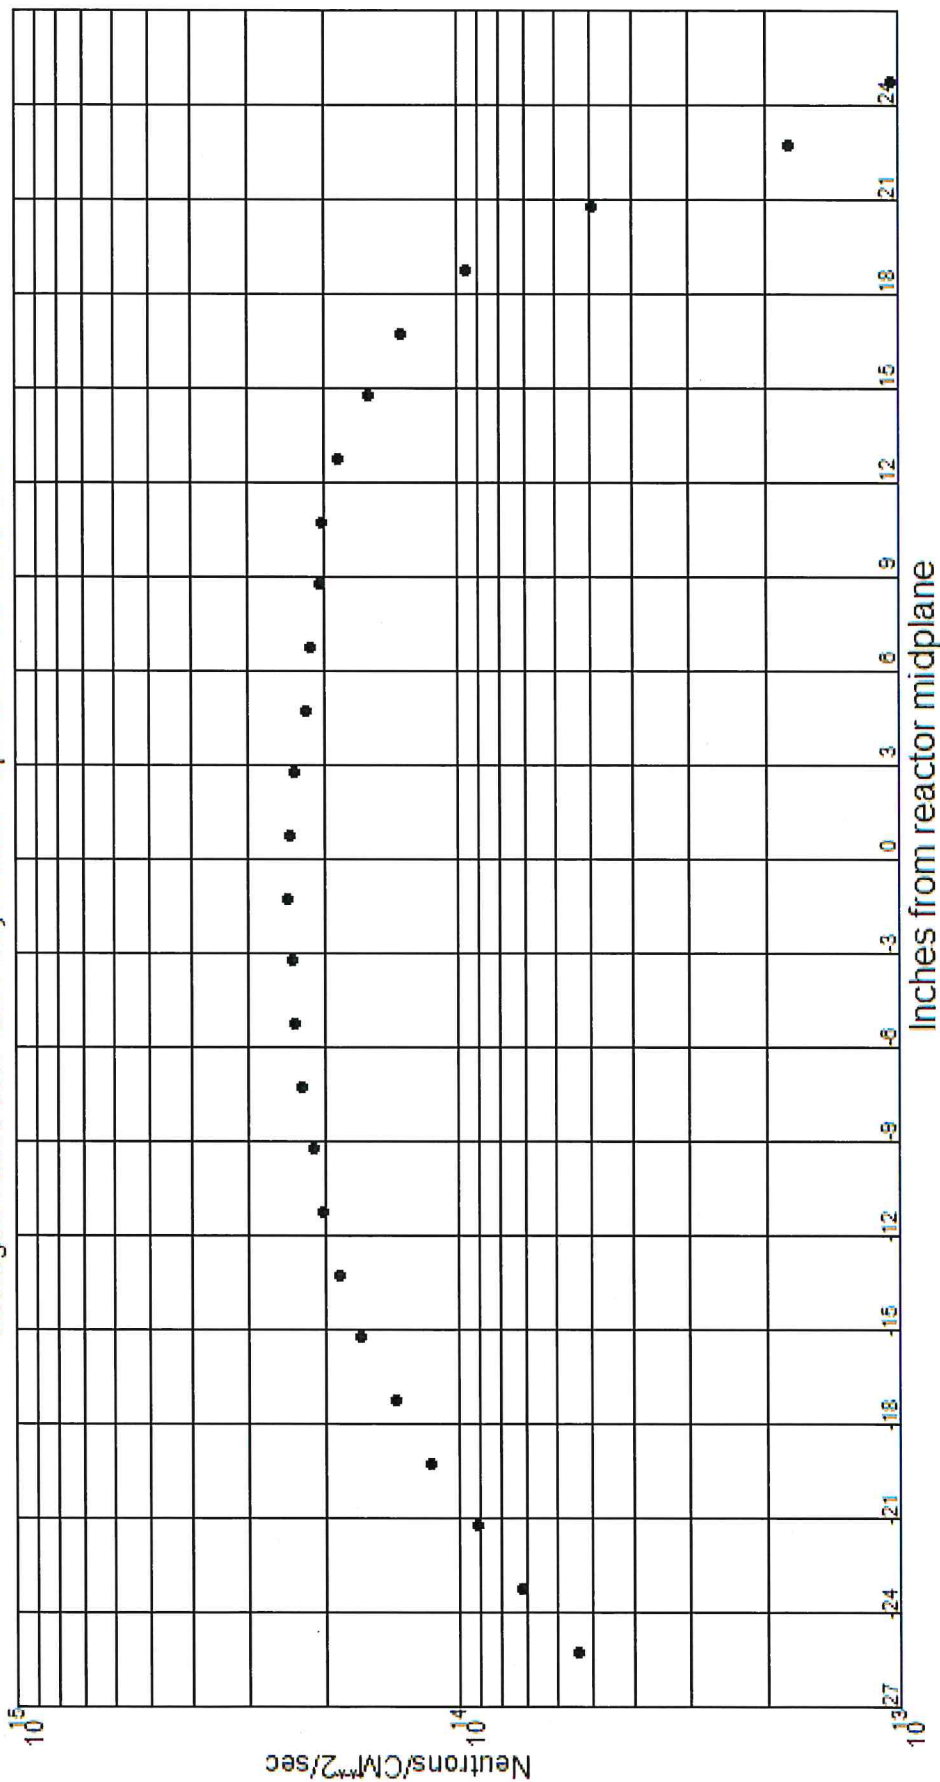

Fast Neutron Fluence Rate (> 1 MeV)

Reactor: ATR

Cycle: 169A

Date: 10/30/20-04/23/21

Monitor No.: SR-260

Position: W-4

Cycle Power: 6773.0 Mwd

Material: Nickel

Experiment: 1C-W

Average Maximum Fluence Rate: 8.13E+13

Averaged values over 63.4 Days reactor operations at 106.8 MW

