



Updated Waste Management System Analysis Tool Requirements and Enhancements

March 2022

Changing the World's Energy Future

Robert Anthony Joseph



DISCLAIMER

This information was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness, of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. References herein to any specific commercial product, process, or service by trade name, trade mark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the U.S. Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the U.S. Government or any agency thereof.

Updated Waste Management System Analysis Tool Requirements and Enhancements

Robert Anthony Joseph

March 2022

**Idaho National Laboratory
Idaho Falls, Idaho 83415**

<http://www.inl.gov>

**Prepared for the
U.S. Department of Energy
Under DOE Idaho Operations Office
Contract DE-AC07-05ID14517**

Updated Waste Management System Analysis Tool Requirements and Enhancements

Robby Joseph

Senior Spent Fuel Management Analyst, Idaho National Laboratory
Integrated Waste Management Campaign Control Account Manager
for System Integration Analysis and Support

March 2, 2022

Disclaimer

This is a technical presentation that does not take into account contractual limitations or obligations under the Standard Contract for Disposal of Spent Nuclear Fuel and/or High-Level Radioactive Waste (Standard Contract) (10 CFR Part 961). For example, under the provisions of the Standard Contract, spent nuclear fuel in multi-assembly canisters is not an acceptable waste form, absent a mutually agreed to contract amendment.


To the extent discussions or recommendations in this presentation conflict with the provisions of the Standard Contract, the Standard Contract governs the obligations of the parties, and this report in no manner supersedes, overrides, or amends the Standard Contract.

This presentation reflects technical work which could support future decision making by DOE. No inferences should be drawn from this presentation regarding future actions by DOE, which are limited both by the terms of the Standard Contract and Congressional appropriations for the Department to fulfill its obligations under the Nuclear Waste Policy Act including licensing and construction of a spent nuclear fuel repository.

NGSAM provides for flexible analysis of an integrated waste management system

- Next-generation System Analysis Model (NGSAM) is an agent-based discrete event simulation tool based on the Process Analysis Tool (PAT) framework developed at Argonne National Laboratory (ANL)
- Designed for origin site to disposition site modeling of spent nuclear fuel (SNF)*
- NGSAM allows analysts to:
 - Add, remove, and modify model logic
 - Generate custom reports
 - Analyze a wide range of integrated waste management system configurations, approaches, and scenarios
- NGSAM reference data are obtained from the Used Nuclear Fuel – Storage, Transportation & Disposal Analysis Resource and Data System (UNF-ST&DARDS) and the DOE Spent Fuel Database
- NGSAM discussed in prior NWTRB meetings
 - Today's presentation provides an update

*spent nuclear fuel and used nuclear fuel are sometimes used synonymously

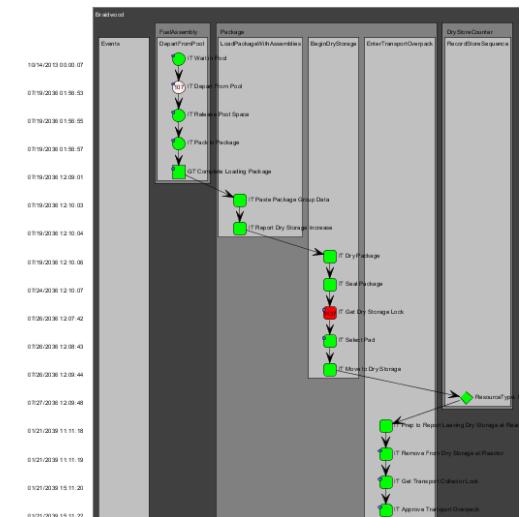

Outline



- NGSAM background
- NGSAM development, execution, and capabilities
- Outputs for system analysis produced by NGSAM
- Future planned capabilities
- Conclusions

NGSAM developers and system analysis contributors:

- Argonne National Laboratory: Brian Craig, Chuck Olson, Lucas Vander Wal, Evan VanderZee
- Idaho National Laboratory (INL): Robby Joseph, Gordon Petersen
- Oak Ridge National Laboratory: Abi Adeniyi, Riley Cumberland
- Pacific Northwest National Laboratory: Mark Nutt

NGSAM helps analysts model potential waste management system strategies

- NGSAM models the backend for SNF and high-level radioactive waste (HLW)
- NGSAM allows detailed customization for options such as:
 - Storage facilities (dry/wet)
 - Packaging options
 - Costs
 - Throughputs
 - Transportation assets
- NGSAM can help answer questions related to:
 - Various scenarios involving multiple facilities
 - Shared resources required (e.g., transportation assets)
 - Site inventories as a function of time
 - Consolidated storage facilities and options

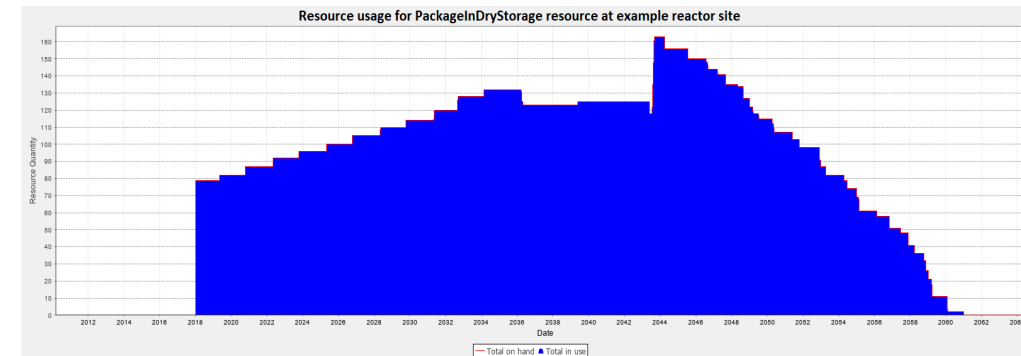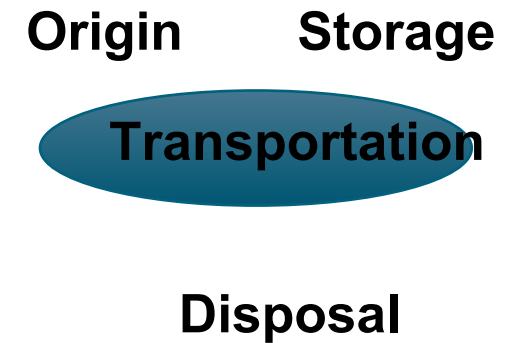

NGSAM is used to compare numerous alternatives to answer “what if” questions


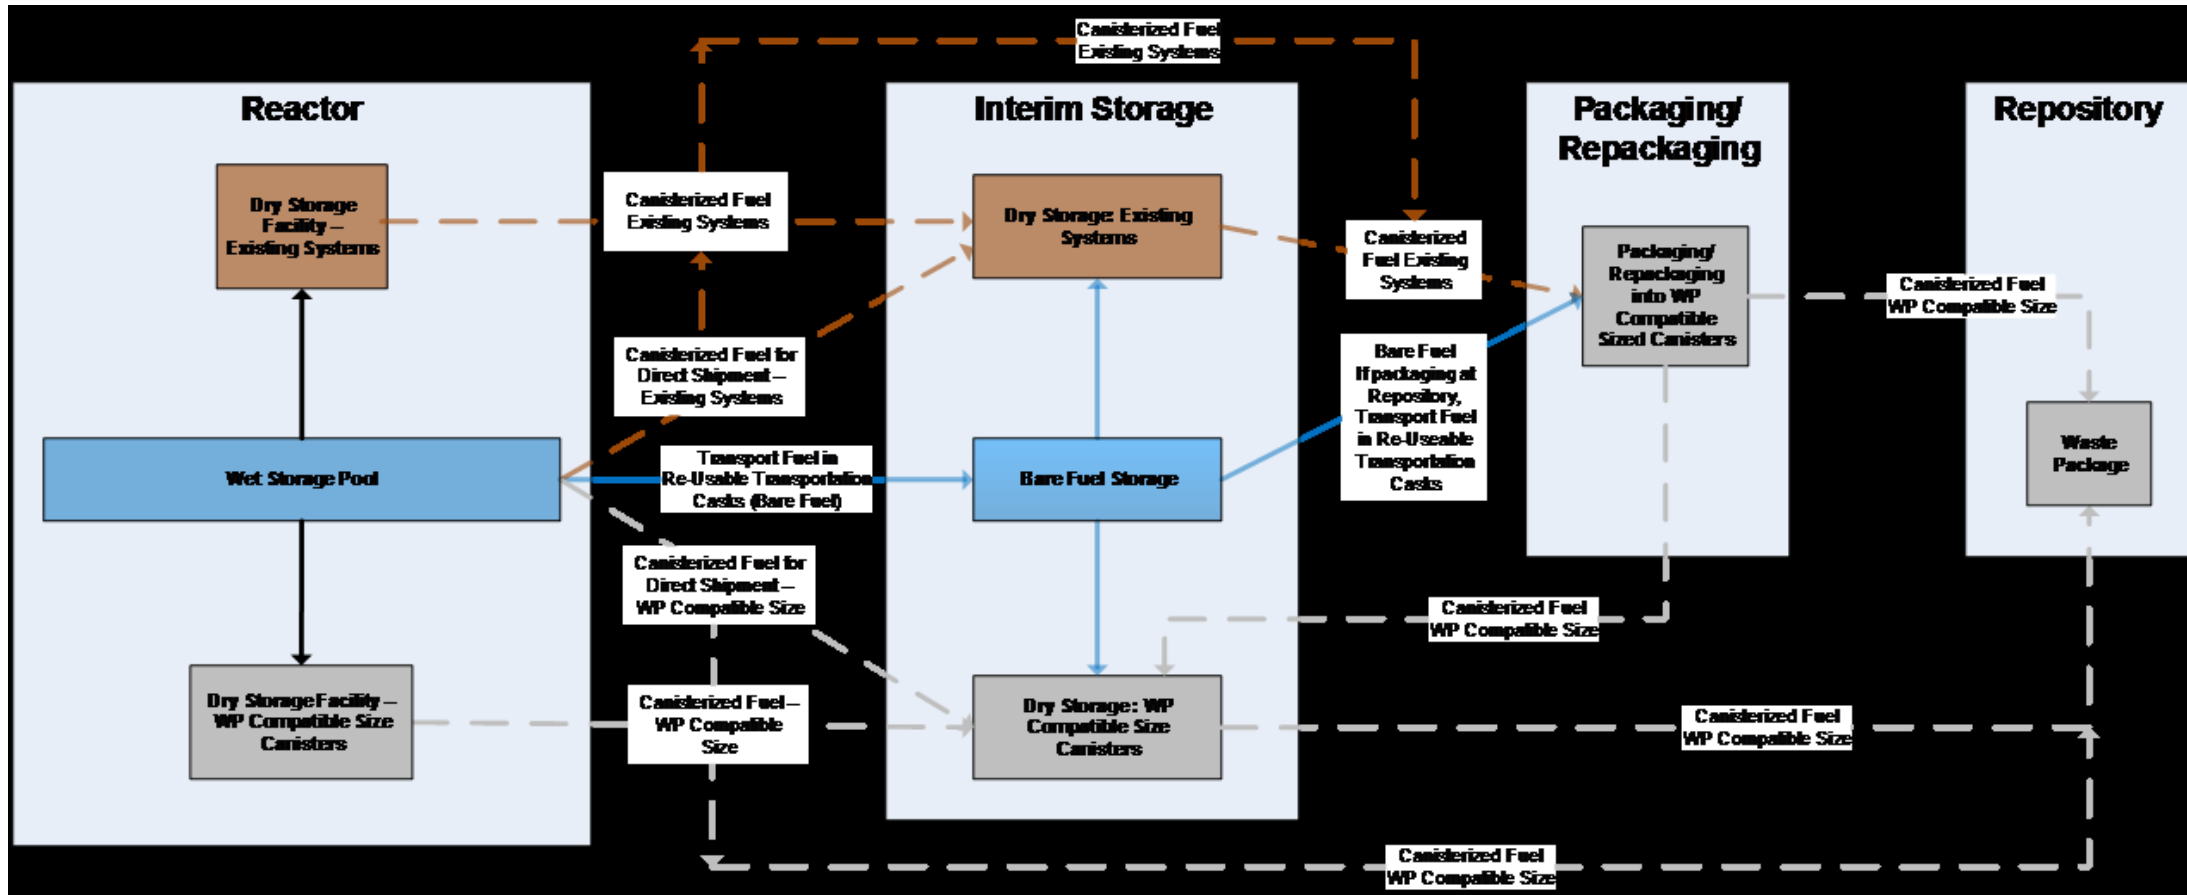


Illustration of potential alternatives in a future waste management system


NGSAM can execute in two different modes

- Stand alone
 - All setup and simulations are performed on the analyst's machine
 - Useful for testing small changes to the logic before running larger simulations
 - Does not require internet connection
- Client-server
 - All setup is performed on the analyst's machine
 - Simulation is executed in the NGSAM cluster at ANL
 - Results are retrieved from the server after execution
 - Useful for running large scenarios that require intensive resources
 - Current cluster can run ~12 simulations simultaneously

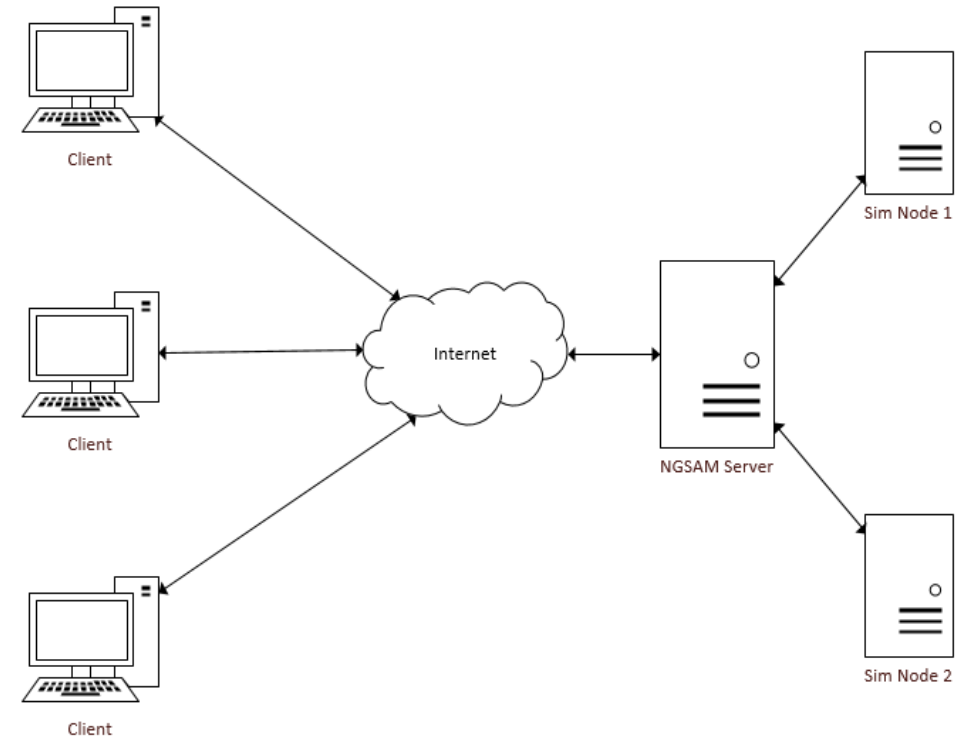

NGSAM continues to be developed using a spiral methodology

- Typically released 2–3 times per year
- Analysts are typically involved in the requirements period of the development cycle
- NGSAM utilizes a close relationship with analysts to provide constant feedback throughout the entire development lifecycle
- NGSAM can now model the entire waste management system from generation to disposal
 - Enhancements are added as needed

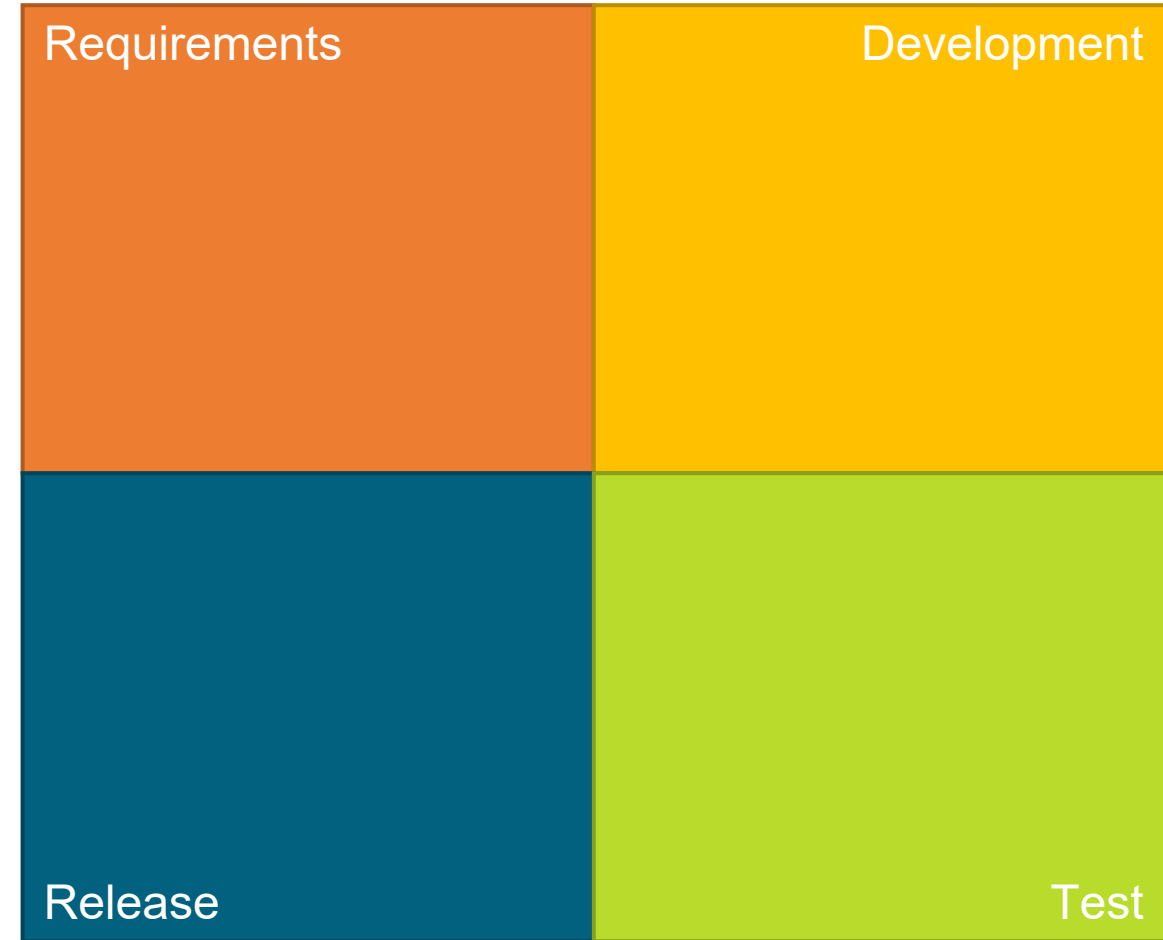

Spiral methodology schematic

Recent NGSAM enhancements have expanded capabilities and improved user experience

- Additional output reports or modification of existing ones
- Ability to use logic that simulates allocation of SNF shipment opportunities to utilities/custodians first, before making allocation to specific sites
- A hypothetical allocation method that seeks to reduce the number of packages loaded into dry storage at reactor sites
- Added support for multiple canister loading map options and packages with multiple compatible transportation overpacks
- Ability to model hypothetical scenarios where repackaging occurs at reactor sites
- Ability to model loading SNF from pool storage at a consolidated interim storage facility (ISF) into dry storage at the ISF
- Ability to generate and implement user edits via the NGSAM website

NGSAM Server Status Results User Data Downloads gov/vanderwal

Edit Profile: updated-cask *dry_package (1 edit)

Actions Page size Save

0 selected << < Showing 1 to 50 of 129 > >>

Filter

Selected	Id	model_id	reactor_type_id	canister_model_spec_id	bare_fuel_cask_model_spec_id	storage_orientation	weight_empty_lbs	weight_loaded_lbs
<input type="checkbox"/>	1200	NewCask	1		1200	2	190000	240000
<input type="checkbox"/>	6	CASTORV-21	1		1	2	194000	234000
<input type="checkbox"/>	7	CASTORX-33	1		2	2	168000	212000
<input type="checkbox"/>	199	MC-10 (BWR)	2		3	2	205600	239600
<input type="checkbox"/>	202	NAC-STC	4		6		175970	249520
<input type="checkbox"/>	203	REA-2023 (BWR)	2		7	2	168000	196000
<input type="checkbox"/>	204	REA-2023 (PWR)	1		8	2	168000	196000
<input type="checkbox"/>	115	TN-24	1		9	2	166000	226000

Recent transportation-related NGSAM enhancements have expanded capabilities and improved user experience



- Tracking of railroad escort car and buffer car acquisition
- Addition of heavy haul truck and barge routes for some sites and support for user-defined intermodal routes
 - Example transportation routes incorporated from Stakeholder Tool for Assessing Radioactive Transportation (START) analyses
- Updates to logic that checks the transportation cask thermal limit maps prior to package transport
- Ability to model transloading (moving SNF casks from one transportation mode to another)



Note: example routes are for illustrative purposes only and do not reflect a selected destination site


Updates to the modeling capabilities and database structure for DOE-managed SNF

- Initial improvements included:
 - Changed level of modeling from the canister to the individual fuel element
 - Additional packaging logic for DOE-managed SNF because of the variety of geometries
 - Multiple different DOE-managed fuel types can be packaged in the same type of canister
 - Additional disposal overpack packaging logic so packages containing DOE-managed SNF could be co-loaded with HLW in disposal overpacks
- Improving the modeling capabilities for DOE-managed SNF:
 - Enables analysts to more accurately estimate the number of canisters required to package DOE-managed SNF and, in turn, the number of overpacks and transportation resources that may be required

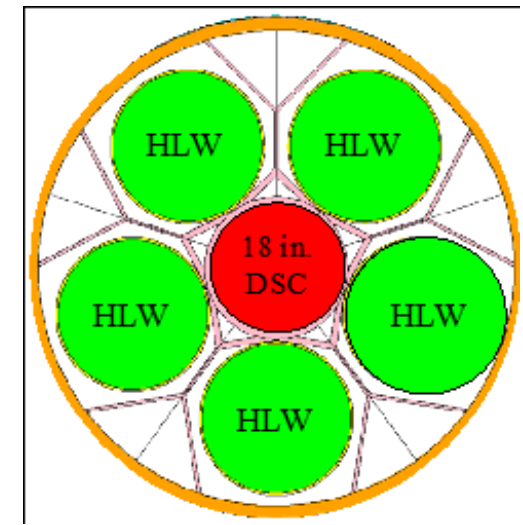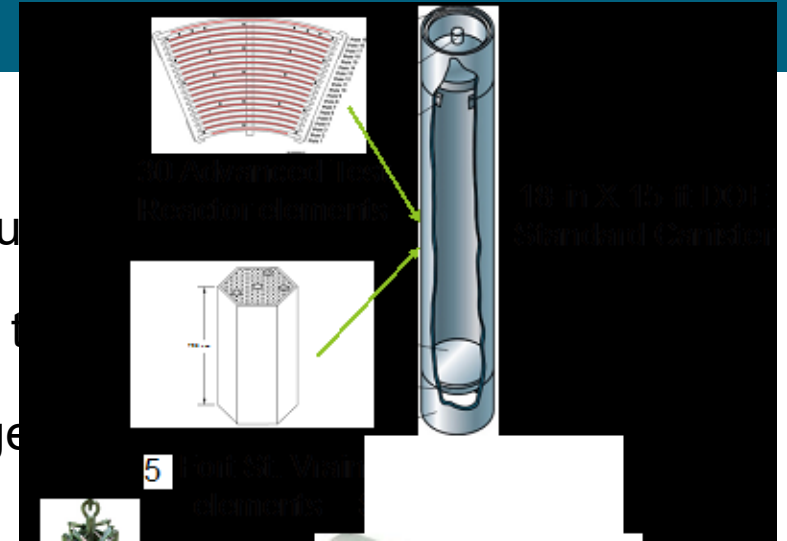

Added reactor site family operational limits to restrict the number of SNF loads taken from the pool and from dry storage at a given reactor each year


- Sites were categorized into 14 families based on the following criteria:
 - Number of operating reactors on site (0–3)
 - Operating reactor type
 - Pressurized-water reactor (PWR)
 - Boiling water reactor (BWR)
 - Length of refueling cycle (18 or 24 months)
 - Number of spent fuel pools (SFPs) (0–4)
 - Configuration of SFPs (shared or dedicated)
- This information is useful for estimating in NGSAM how many casks can be shipped per year from each site

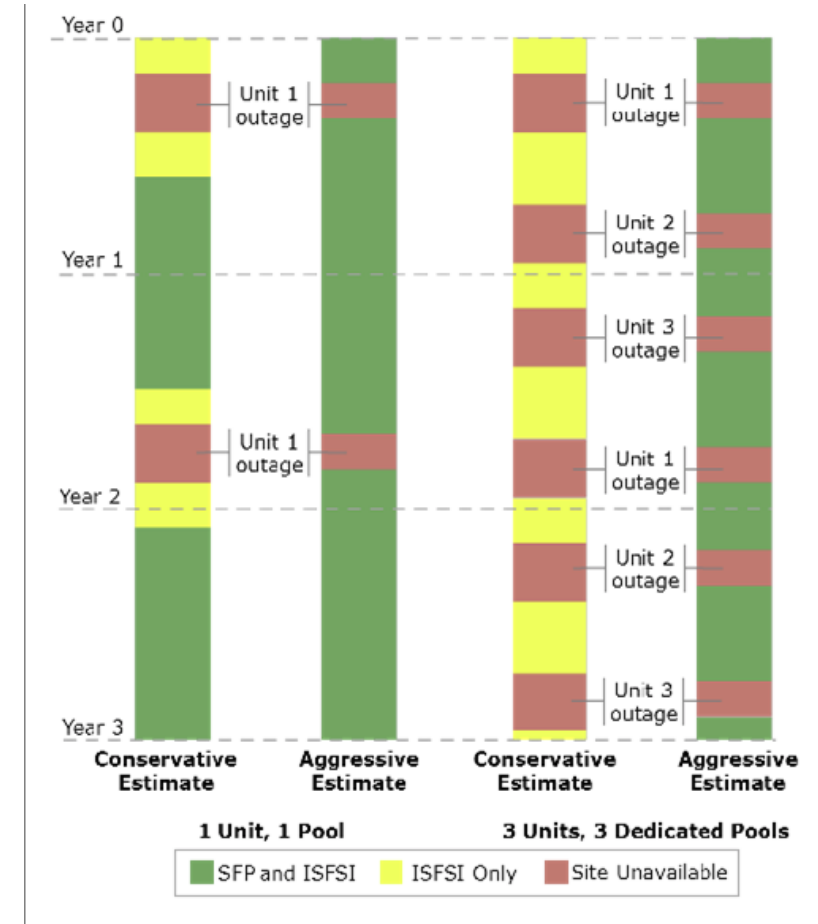

Loading windows example


Why NGSAM and system analysis? The existing U.S. light water reactor fleet has and continues to generate SNF that must be managed

- Over 86,000 MTHM of SNF discharged and in interim storage at reactor sites
- About 2,000 MTHM discharged per year
- Over 3,000 dry storage canisters (over 41,000 MTHM)
- About 200 dry storage canisters added per year
- Potential growth to ~145,000 MTU
- Following examples show system analysis results can be used to:
 - Support DOE's consolidated interim storage effort
 - Inform stakeholders and decision makers

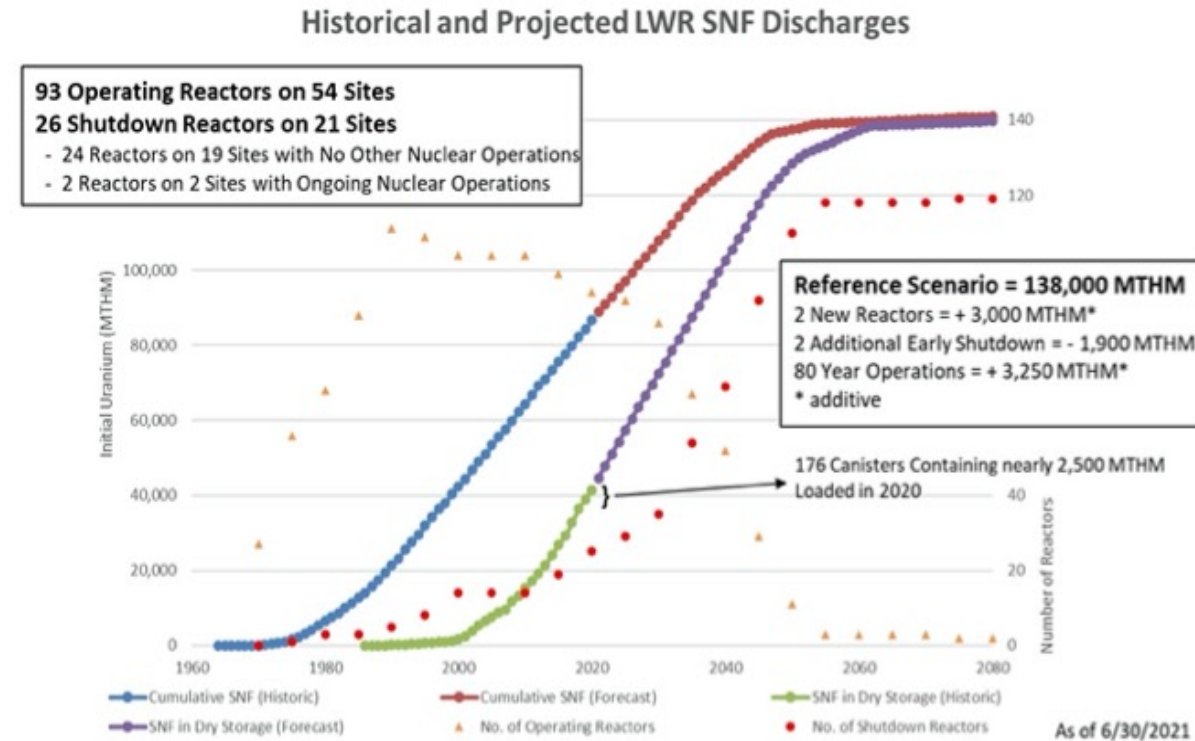

Illustrative system analysis: SNF receipt rates can affect how quickly sites are cleared

- The higher the SNF receipt rates at an ISF and Mined Geologic Repository (MGR), the faster that sites can be cleared of SNF
- Increased receipt rates would also require additional infrastructure capabilities at receiving facilities and within the transportation system
- MGR opens 20 years after ISF for these scenarios

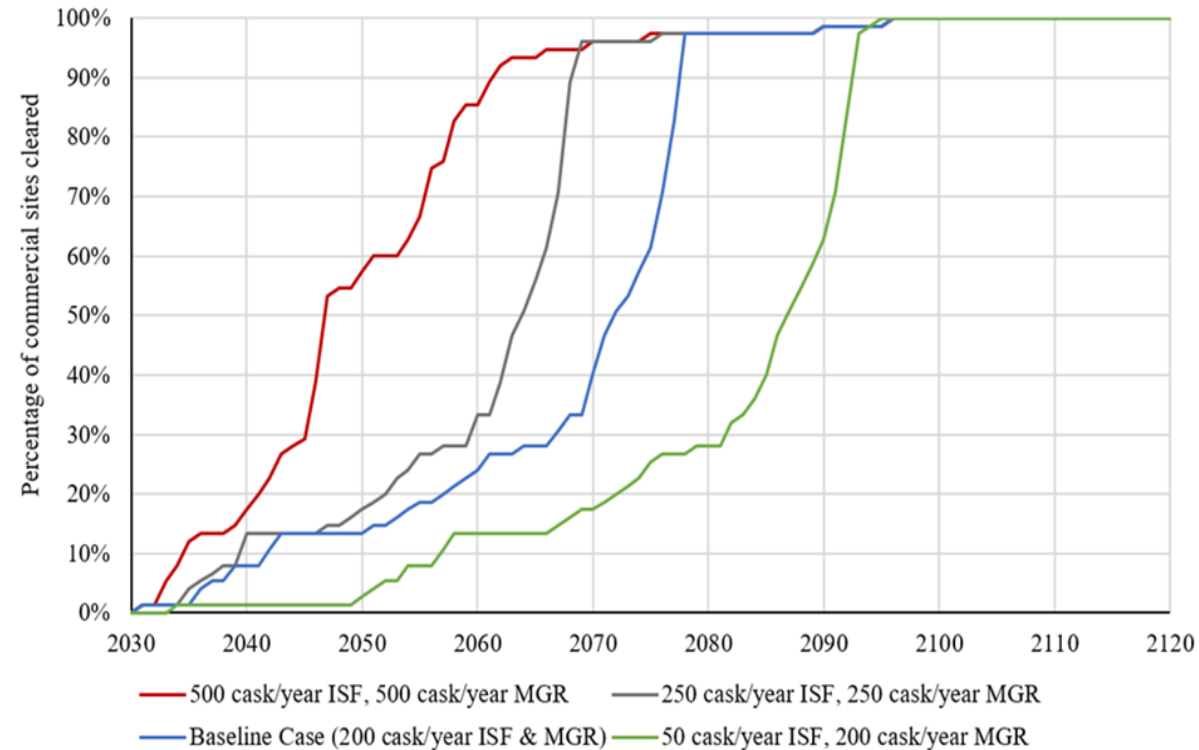

Percentage of commercial sites cleared as a function of time


Illustrative system analysis: Higher ISF capacity can enable more reactor sites to be cleared of SNF before an MGR opens

Maximum ISF capacity and the number of sites cleared with an ISF by the time a repository is assumed to open.

Scenario number	ISF Receipt rate (Dual Purpose Canisters/ year)	ISF opening date	MGR opening date	Maximum ISF capacity	Sites cleared by MGR opening date	Similar scenarios listed according to key difference
1	500	2030	2050	~125,000	43	1–4: shipment rate
2	250	2030	2050	~74,000	13	1–4: shipment rate
3	200	2030	2050	~60,000	10	1–4: shipment rate 5–6: MGR date
4	50	2030	2050	~15,000	2	1–4: shipment rate
5	200	2030	2040	~29,000	6	3, 6: MGR date
6		2030	2060	~89,000	19	3, 5: MGR date 7: ISF date
7		2040	2060	~60,000	10	6: ISF date

Illustrative system analysis: Implications of deploying standardized canisters

- NGSAM can be used to examine scenarios in which the nuclear power industry transitions
 - From dual-purpose canisters (DPCs) which may require repackaging prior to disposal;
 - To standardized transportation, aging, and disposal (STAD) canisters
- A portion of a consolidated ISF (CISF), or a separate CISF, could be dedicated to receiving SNF in STAD canisters, ideally shipped directly from reactor spent fuel pools
- Results indicate some dry storage for STAD canisters at reactor sites might be needed depending on assumed CISF receipt rate and reactor shutdowns with time

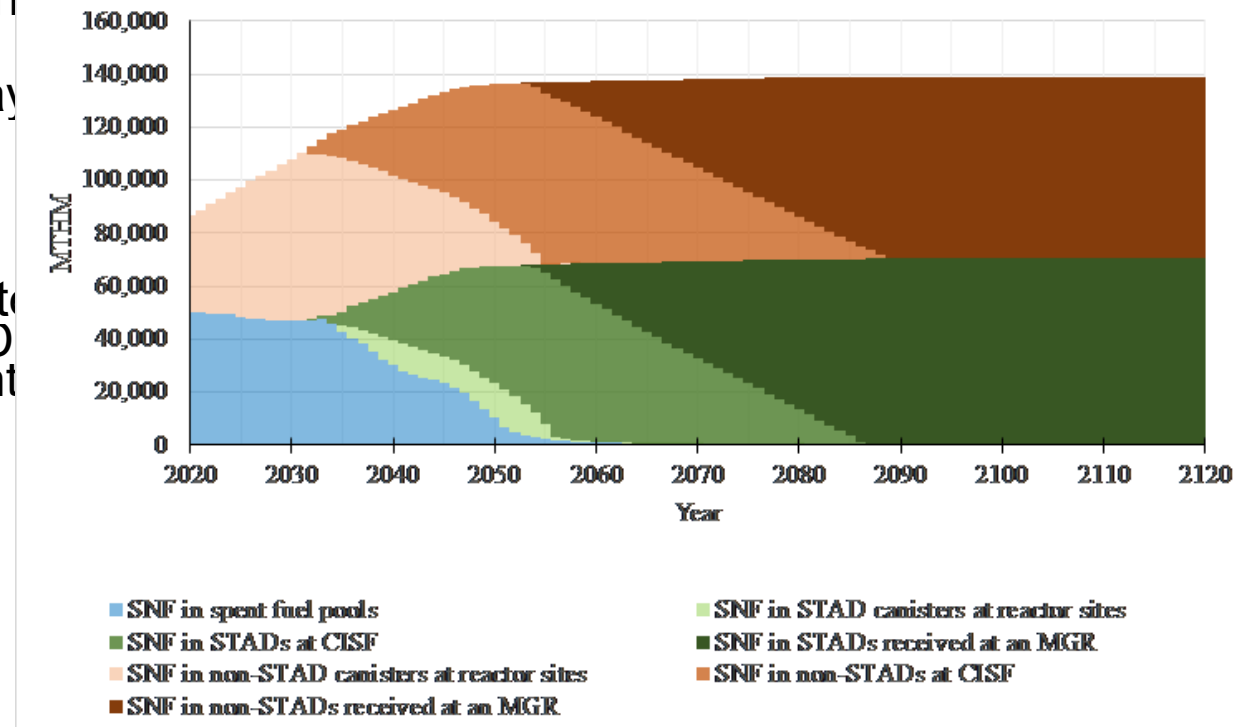

SNF inventories in non-STAD canisters (DPCs) and in STAD canisters as a function of time

Outputs from NGSAM can be used to perform constrained, multi-objective optimization

- Multi-objective evaluation framework (MOEF) analysis has been explored by the Integrated Waste Management program in the past
 - MOEF considers multiple objectives and stakeholder perspectives
- MOEF analysis is planned to be performed outside of NGSAM using data produced by NGSAM runs
 - Some outputs in NGSAM were originally selected to feed into MOEF analysis
- MOEF research may be restarted depending on funding and program direction


Preliminary requirements for advanced reactor fuel cycles considered

- Preliminary requirements developed for advanced reactor fuels, reprocessing, treatment, and conditioning
- Other nuclear fuel cycle system analysis tools sponsored by DOE's Office of Nuclear Energy might be better suited for initial high-level analysis
- NGSAM could add value by modeling in greater detail the transport, storage, and disposal of spent fuel and waste from advanced reactors at the fuel element and waste container levels
 - It is envisioned NGSAM could be able to estimate reprocessing and/or treatment/conditioning facility capability needs

Integrated waste management system analysis is necessary to better understand various possible options, approaches, and strategies to inform all stakeholders and future decisions about advanced reactor fuel cycles

NGSAM provides for flexible analysis using data from UNF-ST&DARDS or the Spent Fuel Database

- Designed for origin site to disposition site modeling of spent nuclear fuel (SNF)
 - It is now fully functional, and additional enhancements are implemented as necessary
- NGSAM allows analysts to:
 - Add, remove, and modify model logic
 - Generate custom reports
 - Analyze a wide range of integrated waste management system configurations, approaches, and scenarios
- Preliminary requirements for advanced reactor fuel cycles have been developed
- System analysis results generated by NGSAM can be used to inform decision makers and stakeholders

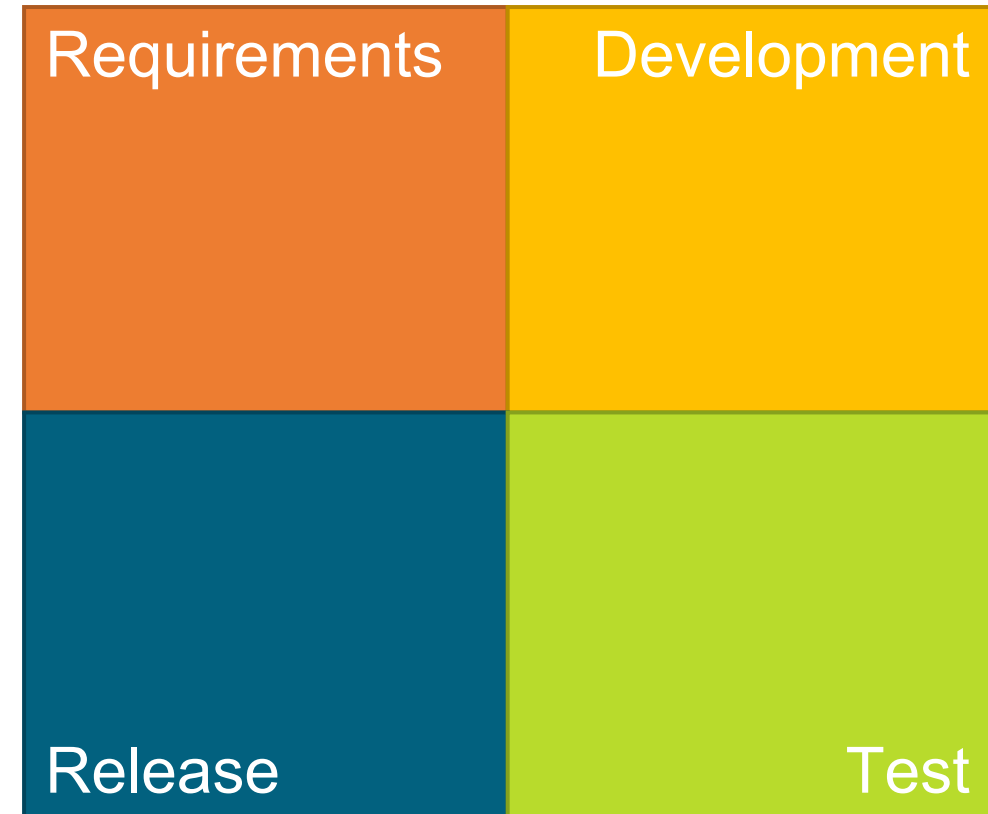

The background is a collage of various industrial and nuclear-related images, including cooling towers, robotic arms, a worker in a hard hat, and a large industrial structure, all overlaid with a blue geometric pattern of intersecting lines.

Questions?

